ACOUSTIC CEILINGS



MINERAL FIBER

FIBERGLASS

USG

BENNER PRODUCTS



BENNERWINTER



BENNERDU



BENNERLAST



BENNERFINE



BENNERGLASS PRO



BENNERGLASS



BENNERPVC

Our exceptional selection includes a wide range of innovative and environmentally friendly acoustic ceiling solutions. All our models offer a unique combination of functional and aesthetic features designed to accommodate a wide range of architectural needs.

AIA

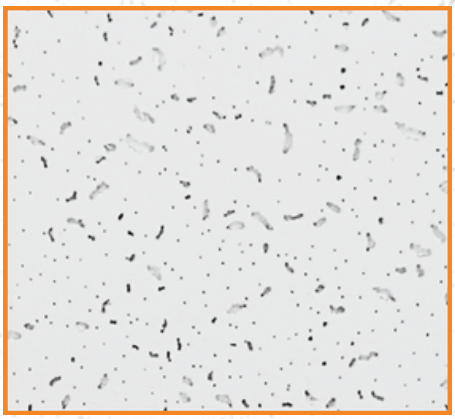
U.S. GREEN BUILDING COUNCIL MEMBER

WARRANTY 30 YEAR WARRANTY

PET FRIENDLY

www.bennerproducts.com

BENNERWINTER




Material: Wet formed mineral fiber
Surface finish: Factory applied vinyl latex paint / smooth

Mineral Fiber

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
1110	10	5/8"	24"	24"	SQ	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"
1111	10	5/8"	24"	24"	BT	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"
1112	10	5/8"	24"	24"	SQ	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"
1114	10	5/8"	24"	48"	SQ	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:



Available Edges:





BENNERDU




Material: Wet formed mineral fiber
Surface finish: Factory applied vinyl latex paint / sanded texture

Mineral Fiber

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
1210	10	5/8"	24"	24"	SQ	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"
1211	10	5/8"	24"	24"	BT	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"
1212	10	5/8"	24"	48"	SQ	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"
1213	10	5/8"	24"	48"	BT	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"
1214	10	5/8"	24"	24"	BT	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 9/16"

Color

Material:



Available Edges:





BENNERLAST




Material: Wet formed mineral fiber & fiberglass tissue
Surface finish: Factory applied vinyl latex paint / fine texture

Mineral Fiber

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
1510	10	5/8"	24"	24"	SQ	0.65	36	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
1515	10	3/4"	24"	24"	BT	0.75	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:



Available Edges:





BENNERFINE




Material: Wet formed mineral fiber
Surface finish: Factory applied vinyl latex paint / smooth

Mineral Fiber

ITEM	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
1411	5/8"	24"	24"	BT	0.55	35	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"
1412	5/8"	24"	48"	SQ	0.55	35	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:




Available Edges:





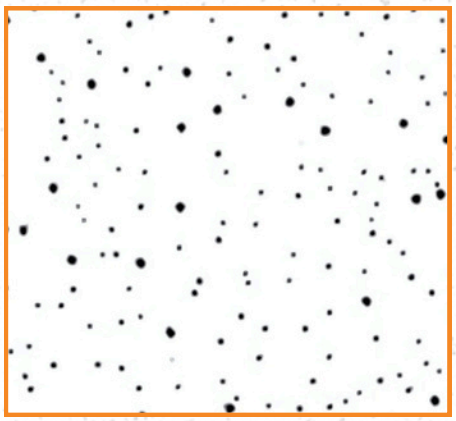BENNERSOFT




Material: Wet formed mineral fiber
Surface finish: Factory applied vinyl latex paint / smooth

Mineral Fiber

Product	ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
BennerSoft	1710	10	5/8"	24"	24"	SQ	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1711	10	5/8"	24"	24"	BT	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1712	10	5/8"	24"	48"	SQ	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1713	10	5/8"	24"	48"	BT	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1714	10	3/4"	24"	24"	SQ	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1715	10	3/4"	24"	24"	BT	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1716	10	3/4"	24"	48"	SQ	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1717	10	3/4"	24"	48"	BT	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:



Available Edges:





BENNERGLASS PRO



Material: Fiberglass with white transparent membrane
Surface finish: Fiberglass tissue & factory latex paint / light textured

Fiberglass

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
2114	10	1"	24"	24"	SQ	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"
2115	10	1"	24"	24"	BT	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"
2116	10	1"	24"	48"	SQ	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"
2117	10	1"	24"	48"	BT	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:



Available Edges:



References:

- Noise ReductionCoefficient(NRC) - ASTM C423 / Classified with ULlabel
- CeilingAttenuationClass(CAC) - ASTM E1414 / Classified with ULlabel
- Fire resistance - ASTM E84 / Flame Spread - ASTM E1264
- Light Reflectance - ASTM E1477
- Humidity Resistance (HR) - ASTM C367
- Microbial Resistance (MR) - ASTM D6329
- Air Quality Standards - ASTM D5116

BENNERGLASS



Material: Fiberglass with white transparent membrane

Surface finish: Fiberglass tissue & factory latex paint / light textured

Fiberglass

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	Color
1610	10	5/8"	24"	24"	SQ	0.6	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"	
1611	10	5/8"	24"	48"	SQ	0.6	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"	

Material:



Available Edges:



BENNERPVC




Material: Gypsum Board Substrate
Surface finish: Fiberglass tissue & factory latex paint / soft textured

Gypsum Board

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	Color
3111	10	3/8"	24"	24"	SQ	N/A	35	Class A	0.75	95-99%	Very High	Yes	Very High	T-Grid 15/16"	
3112	8	3/8"	24"	48"	SQ	N/A	35	Class A	0.75	95-99%	Very High	Yes	Very High	T-Grid 15/16"	

Material:



Available Edges:



References:

- Noise ReductionCoefficient(NRC) - ASTM C423 / Classified with ULlabel
- CeilingAttenuationClass(CAC) - ASTM E1414 / Classified with ULlabel
- Fire resistance - ASTM E84 / Flame Spread - ASTM E1264
- Light Reflectance - ASTM E1477
- Humidity Resistance (HR) - ASTM C367
- Microbial Resistance (MR) - ASTM D6329
- Air Quality Standards - ASTM D5116

USG CEILING



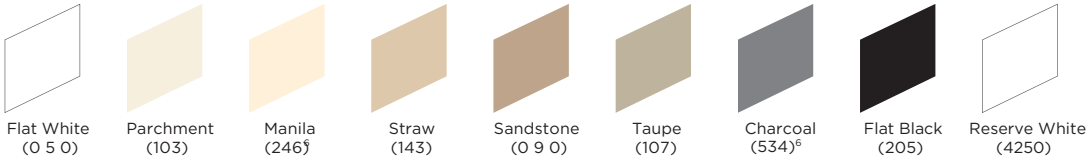
USG Mars™ Healthcare Acoustical Panels
+ USG Donn® DX®/DXL™ Acoustical Suspension System
Shape Therapeutics Lab
Architect: ZGF Architects
Photo: © Moris Moreno

USG Ceiling Solutions

USG CEILING SOLUTIONS COLOR PROGRAM

STANDARD COLORS


STANDARD COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS[1, 4]



Flat White (0 5 0) | Parchment (103) | Manila (246)[6] | Straw (143) | Sandstone (0 9 0) | Taupe (107) | Charcoal (534)[6] | Flat Black (205) | Reserve White (4250)

ADVANTAGE COLORS

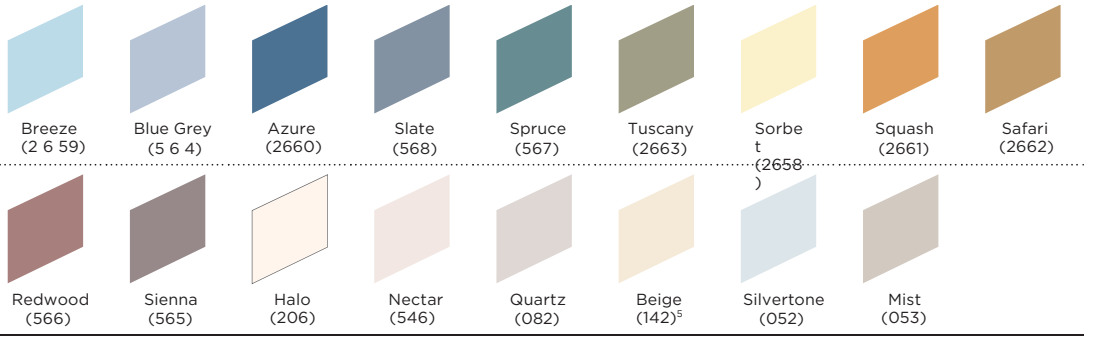ADVANTAGE COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS[1, 4]



Breeze (2 6 59) | Blue Grey (5 6 4) | Azure (2660) | Slate (568) | Spruce (567) | Tuscany (2663) | Sorbet (2658) | Squash (2661) | Safari (2662)

Redwood (566) | Sienna (565) | Halo (206) | Nectar (546) | Quartz (082) | Beige (142)[5] | Silvertone (052) | Mist (053)

PREMIUM COLORS


PREMIUM COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS[1,4]



Dawn (3679) | Old Stone (3691) | Sea Shell (3678) | Light Brown (3690) | Nut Brown (3680) | Peat (3682) | Shale (3683) | Ocean Ridge (3684) | Atmosphere (3681)

Laguna (3685) | Grass (3688) | Tangy Taleia (3689) | Deep Cranberry (3687) | Deep Violet (3686) | Deep Berry (3693) | Deep Blue (3692) | Flat Black (205)

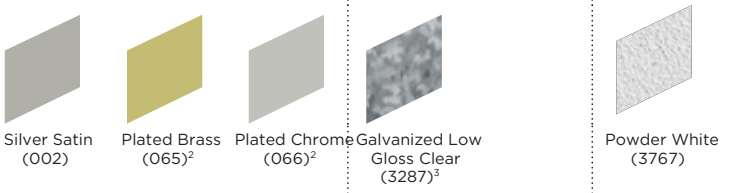SUSPENSION SYSTEMS ONLY



STANDARD COLORS

Silver Satin (002) | Plated Brass (065)[2] | Plated Chrome (066)[2]

ADVANTAGE COLORS

Galvanized Low Gloss Clear (3287)[3]

POWDER COATED FINISH

Powder White (3767)

CUSTOM COLOR MATCHING



Note
Pleaseconsult your USG/CGC sales representative for custom colors. USG will match colorsfrom most major paint manufacturers. Plant to review all colors not listed in colorprograms for manufacturing capability.

Notes

1. Samples shown are representative of colors for tile and grid only. Color may vary on specialty products.
2. Brass and Chrome available in USG Donn® Brand DX®/ USG Donn® Brand DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C. Brass and Chrome cross tees available only in DXD™-type butt-cut ends. Shadow moldings are not available in Brass and Chrome.
3. Galvanized Low Gloss Clear is available in USG Donn® Brand DX® / USG Donn® Brand DXL™ Acoustical Suspension System only. Galvanized steel with a low gloss clear finish coat can vary significantly from lot to lot. This is due to the inherent differences in the hot-dipped galvanization coating process.
4. Grid colors applied to the visible cap only. For 360° painting, consult the Specialty Ceiling System price list. Moldings are painted on the exposed horizontal leg.
5. Beige is a Standard color for CGC Donn® Brand Suspension Systems.
6. Manila and Charcoal are Advantage not Standard colors for CGC Donn® Brand Suspension Systems.

USG COLOR PROGRAM FOR ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com **CGC:**
contact Sales Representative

TECHNICAL SERVICES
800USG.4YOU(874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

AVAILABLE PANELS	Item No.	Size	Edge	Standard Colors[8]		Advantage Colors[8]		Premium Colors[8]		Sq. Ft./ Carton	Color Options
				Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days		
USG ECLIPSE™ CLIMAPLUS™ (SC1812)	**76975**	2′x 2′x3/4″	FL	48	10	48	10	—	—	48	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
	76775	2′x 2′x3/4″	SLT	48	10	48	10	—	—	48	
USG FROST™ (SC1968)	**414**	2′x 2′x3/4″	SLB	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	418	2′x 2′x3/4″	FL	32	10	2,688	15	2,688	15	32	
	419	2′x 2′x3/4″	FLB	32	10	2.688	15	2,688	15	32	
USG GLACIER™ BASIC (SC1819)	**707**	2 x 2′x3/4″	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	708	2 x 2′x3/4″	FL	32	10	2,688	15	2,688	15	32	
USG MARS™ HIGH-NRC/HIGH-CAC (SC2487)	**88137**	2′x2′x1″	SQ	32	30-45	32	30-45	32	30-45	32	Premium colors offered. Standard and Advantage colors are all considered "Custom" for pricing.
	88138	2′x2′x1″	SLT	32	30-45	32	30-45	32	30-45	32	
	88139	2′x2′x1″	FLB	32	30-45	32	30-45	32	30-45	32	
	88134	2′x2′x7/8″	SQ	40	30-45	40	30-45	40	30-45	40	
	88135	2′x2′x7/8″	SLT	40	30-45	40	30-45	40	30-45	40	
	88136	2′x2′x7/8″	FLB	40	30-45	40	30-45	40	30-45	40	
	86186	2′x 2′x3/4″	SQ	48	30-45	48	30-45	48	30-45	48	
	86786	2′x 2′x3/4″	SLT	48	30-45	48	30-45	48	30-45	48	
	86986	2′x 2′x3/4″	FLB	48	30-45	48	30-45	48	30-45	48	
USG PREMIER HI-LITE™ KAPOK (SC1838)	**7054G**	2′x2′x5/8″	SQ	128	10	—	—	—	—	128	White and Flat Black only.
	7055G	2′x4′x5/8″	SQ	128	10	—	—	—	—	128	
	7056G	2′x2′x5/8″	SQ	128	10	—	—	—	—	128	
	7057G	2′x4′x5/8″	SQ	128	10	—	—	—	—	128	
USG RADAR™ (SC2127)	**2210**	2′x2′x5/8″	SQ	64	10	64	10	—	—	64	Standard colors. Advantage: Beige, Mist, Silvertone only.
	2220	2′x2′x5/8″	SLT	64	10	64	10	—	—	64	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
	2410	2′x4′x5/8″	SQ	64	10	64	10	—	—	64	Standard colors. Advantage: Beige, Mist, Silvertone only.
USG RADAR™ ILLUSION™ TWO/24 (SC2127)	**2842**	2 ′x4′x3/4″	SLT	48	10	48	10	—	—	48	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
USG RENDITIONS™ ANIMATIONS (IC327), **USG RENDITIONS™ BOUNDARIES** (IC332) **AND USG RENDITIONS™ CUSTOM FROST™ PANEL** (CLIMAPLUS™NOT AVAILABLE) (IC356)	**Various**	2′x 2′x3/4″	SLB,	32	15	2,688	20	2,688	20	32	White, Standard, Advantage and Premium colors. (Advantage are 2,688 min. sq. ft.) **Note** Custom colors are 25-day minimum lead timefor USG Frost™.
USG SANDRIFT™ (SC1841)	**808**[7]	2′x 2′x3/4″	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	809[7]	2′x 2′x3/4″	FL	32	10	2,688	15	2,688	15	32	

7. To highlight the unique texture of USG Sandrift™ Acoustical Panels, choose light colors.
8. For colors, it is not recommended to mix date codes or lot numbers.

USG Ceiling Solutions


USG DRYWALL SUSPENSION SYSTEM



USG Drywall Suspension System / USG Sheetrock® Brand Gypsum Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PROFILE



FEATURES AND BENEFITS

- Installs faster than traditional framing methods.
- More than 60 UL fire-resistive designs.
- Assemblies available to meet STC and IIC requirements.
- Easily frames openings for Type F and Type G light fixtures.
- Evaluated for building code compliance according to ICC ESR-4358.
- G90 galvanization available for a variety of environmental conditions including exterior ceiling systems.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

APPLICATIONS

- Exterior ceilings
- Fire-rated and non-fire-rated interior gypsum board ceilings

USG CGC

IT'S YOUR WORLD. BUILD IT.™

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com **CGC:**
contact Sales Representative

TECHNICAL SERVICES
800USG.4YOU(874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL

usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

STANDARD, ADVANTAGE, PREMIUM COLORS

- All standard products seen below are available within 15 days unless otherwise noted:
  - -AX™
  - -DXT™/DXLT™
  - -DX®/DXL™
  - -DXLA™
  - -DXF™/DXLF™
  - -DXFF™
  - -DXI™
  - -ZXLA™

- One-carton minimum for suspension systems.
- Suspension systems have color caps only.
- For 360° painting, consult the Specialty Ceiling System price list.
- Moldings are painted on the exposed horizontal leg.
- All metric items are offered in Flat White, USG service level C and CGC service level B. MEDXF3600, MEDXF600 and MEDXF1200N also offered in Flat White with Black Reveal, USG service level C and CGC service level B.

CUSTOM COLORS

- Suspension systems and panels are also available in colors not listed in Standard, Advantage and Premium offerings.
- Custom colors are subject to approval.
- A 3"x5" color chip is needed for matching.
- Lead time for custom colors will be 15 days unless otherwise notified
- Minimum order quantities may apply.

POWDER-COATED FINISHES

- Lead time for powder-coated finishes, including Powder White (3767), will be quoted via Request-To-Quote (RTQ)
  - Custom powder-coated colors are available and subject to approval.
  - Minimum quantities may apply.

SUSPENSION SYSTEM SERVICE LEVELS

Level	Lead time from order acceptance
Quick Ship	1–2 days
A	5–7 days
B	15 days
C	30 days
Advantage and Premium Colors	Typically 5 weeks from order.

EXCEPTIONS USG ONLY

- USG Donn® Brand Fineline® DXF™/DXLF™ Acoustical Suspension System available in Flat White with Black Reveal for no additional charge. Service level B.
- Brass and Chrome available in USG Donn® Brand DX®/ USG Donn® Brand DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C.
- USG Donn® Brand Fineline® DXFEV™ Acoustical Suspension System (environmental) available in Flat White with Black Reveal standard, service level C. Standard, Advantage, and Premium colors available, service level C.
- USG Logix™ Integrated Systems are available in Flat White, Service level C.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1859/rev. 9-25
© 2025 USG Corporation and/or its affiliates. All rights reserved.
Printed in USA

The trademarks USG, CGC, AX, CLIMAPLUS, DONN, DX, DXD, DXF, DXFEV, DXFF, DXI, DXL, DXLA, DXLF, DXLT, DXT, ECLIPSE, FINELINE, FROST, GLACIER, ILLUSION, LOGIX, MARS, PREMIER HI-LITE, RADAR, RENDITIONS, SANDRIFT, ZXLA, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG DRYWALL SUSPENSION SYSTEM

FLATCEILINGS

ORDERSAMPLES/LITERATURE
USG.comorsamplit@usg.com
CGC.ContactSalesRepresentative

TECHNICAL SERVICES
800USG.4YOU(874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


30 YEAR LIMITED SYSTEM WARRANTY
- No Visible Sag
- Mold/Mildew Protection

SYSTEM COMPONENTS

StraightMainTees



Wall-to-Wall System Straight Tee**



Cross Tees







Moldings















Accessories

	ASTM Class	Length	Height	Item No.	Fire Rating	IBC Seismic Design	Rated Load [1] Hanger Spacing–lb./LF 24" L/240	24" L/360	36" L/240	36" L/360	48" L/240	48" L/360
DGLW 	Heavy Duty	12′	1.617″	DGLW26[1] DGLW26E(G90)[1]		A-F	129	86	57	38	24	16
DGW 	Heavy Duty	6′ to 14′	1.617″	DGW26s	Class A	A-F	131	86	62	41	30	20

							Span L/360 lb./LF Span	Value
DGLW 	—	2′	1-1/2″	DGLW224 DGLW224E (G90)		A-F	24″	99.9
	—	26″	1-1/2″	DGLW2624[1]		A-F	26	93.1
	—	4′	1-1/2″	DGLW424		A-F	″	15.9
	—	50″	1-	DGLW50[1]			48	14.1
	—	72″	1/2″	DGLW624			″	4.7
DGW 	—	5′ 6′ 7′ 8′	1.617″ 1/2″	DGW-6026DM DGW-7226DM DGW-8426DM DGW-9626DM	Class A	A-F	50 ″ 72 ″	
	—	12′	—	DGWM24 DGWM24E	—	A-F	60 ″ 72 84	—
	—	12′	—	DGCM27E	—	A-F	″ 96	—
	—	12′	—	DGLC-12	—	A-F	—	—

DGSC180 Splice Clip*	DGTC90 Transition Clip	DGC4, DGC6, DGC8 USG Compässo™ Drywall Clip	DGWC Wall Attachment Clip	GMAC-1 Close Mount Attachment Clip
				

* See AC3152 for alternative splice details ** See AC3230 for expanded wall-to-wall data

Firecode®

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
Drywall suspensionsystems guide: AC3152
Data sheet: AC3117
Data sheet wall-to-wall: AC3230
Samples: 257202
Direct mount install guide: AC5420

Material
Min. G40 hot-dipped galvanized steel. G90 hot-dipped galvanized steel available for select items.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Installation
Install according to ASTM C636, ASTM E580, ASTM C754 CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction. **Limitations**

Forexterior applications, the suspension system should be reviewed by a structural engineer. Please refer to SC2561 for more information about exterior ceiling applications.

LA Research Report - RR 25764
Refertousg.comformostcurrent version.

ICC Evaluation Services, LLC. Report Compliance
Forareas under ICC jurisdiction, seeICC-ES Evaluation Report ESR-4358 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Notes
1. Manufactured and tested in accordance with ASTM C635, ASTM A653, and ASTM C645.
2. Spanning tees for Direct Mount System mfg. with cross tee connection clip at one end and flush-end at other.
3. Products with 'E' in name are made of G90 HDG steel.

Revit is the trademark of Autodesk Inc.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3117/rev. 6-22

© 2022 USG Corporation and/or its affiliates. All rights reserved.
Printed in U.S.A.

Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

The trademarks USG, CGC, COMPÄSSO, FIRECODE, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.





















Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG CGC

Grids and Edges

09120/USG
BuyLine 4532

USG offers numerous suspension system and edge detail options to help meet your design intentions.Select a suspension system and match it with a corresponding panel edge detail,or vice versa,to assure proper system fit and assembly.

Suspension Systems / Edge Detail	DX® /DXL™	CENTRICITEE™ (DXT)	FINELINE® (DXF)	FINELINE 1/8 (DXFF)	DXW™	CE	DXLA™/ AX™/ ZXLA™/ DXSS	DXL Concealed
Square Edge (SQ)								
Shadowline Tapered (SLT)								
Shadowline (SL)								
Shadowline Bevel (SLB)								
Fineline (FL)								
Fineline Bevel (FLB)								
Pedestals (PE/ILT)								
Pedestals (PE/SLT)								
Interline Tapered (ILT)								
BESK								
SESK								

Notes
1.DONN®BrandAX™,DXLA™,and ZXLA™suspension systems have the same profile as DONNBrand DX/DXL and can utilize the same edge details.

2.DONNBrandDX/DXL,DXLA,ZXLA,DXLF,and DXLT fire-rated suspension systems and FIRECODE™Formulation panels may have restrictions on size and application; refer to appropriate UL Design for acceptable components.

3.The ILT edge is applicable only to Illusion and Pedestals face cut products. 4.Square edge panels are not recommended with 2 x4 modules using 9/16 grid.Refer to product pages for compatible grid options.

Building on a Century of Leadership and Innovation

USG offers the most comprehensive line of products and systems for walls,ceilings and floors.For more than 100 years,the USG name has represented the very best in the building materials industry.With strong brands such as SHEETROCK®Brand Gypsum Panels and DONN®Brand Suspension Systems,USG's reputation of quality and innovation is known worldwide.

USG's total building solutions approach integrates the following critical performance factors:fire resistance,sound control,moisture control,abuse resistance,and aesthetics.To help you design,specify,and install USG systems, please refer to the following resources:

		Products	Resources
Product Offering	**Walls**	**SHEETROCK Brand Gypsum Panels** Available in a number of specialized forms for various applications.	Gypsum Products (SA927)
		FIBEROCK® Brand Panels—Abuse-Resistant Deliver increased resistance to abrasion, indentation, and penetration in demanding construction applications.	Abuse-Resistant Systems (SA929)
		SHEETROCK Brand Interior Finishing Systems Complete line includes joint compounds, tapes, decorative textures, bead and trim, and drywall repair kits.	Interior Finishing Products (J1424)
		DUROCK® Brand Cement Board High strength backer board that delivers a water-durable base for walls, ceilings and countertops.	Cement Systems (SA932)
	Ceilings	**USG Ceilings™** Representing a wide variety of acoustical ceiling panels, suspension systems and specialty ceiling systems.	Ceiling Systems (SC2000)
	Floors	**FIBEROCK Brand Underlayment—AQUA-TOUGH™** All-purpose substrate engineered to meet every residential underlayment need.	FIBEROCK Brand Underlayment-AQUA-TOUGH (F103)
		LEVELROCK®Brand Floor Underlayment Ideal for multi-family,commercial and institutional buildings and for radiant heat applications.	Floor Underlayment (SA305)

Additional Product Information

The Gypsum Construction Handbook
The industry's best resource for good construction practices,also available in a Spanish version.

USG Gypsum Systems Catalog (SA99)
Complete guide togypsum product construction, including fire-rated,sound-rated, and abuseresistant assemblies for commercial and residential applications.

USG Ceiling Systems Catalog (SC2392)
Comprehensive guide to acoustical ceiling panels,suspension systems, and specialty ceiling systems.

USG Specialty Ceiling Systems Catalog (IC430)
Reference to the industry's most innovative specialty and accent ceiling systems for ceiling applications.

Website
www.usgsweets.com
Technical Service
800 USG.4YOU
Samples/Literature
888 874.2450
Samples/Literature E-mail
samplitusg.com
Samples/Literature/Fax
888 874.2348
Customer Service
800 950.3839

Note
All products described here may not be available in all geographic markets.Consult your local sales office or representative for information.

Trademarks
The following are trademarks of USG Interiors,Inc.or a related company:AX,CENTRICITEE,DONN, DX,DXL,DXLA,DXW,FINELINE, USG,ZXLA.

Notice
Weshall not be liable for incidental or consequential damages,directly or indirectly sustained,nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use.Our liability is expressly limited to replacement of defec- tivegoods.Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Safety First!
Follow good safety and indus- trial hygiene practices during handling and installing of all products and systems.Take necessary precautions and wear the appropriate personal protective equipment as need- ed.Read material safety data sheets and related literature on products before specification and/or installation.

Manufactured by
United States Gypsum Company
125 South Franklin Street
Chicago,IL 60606

SA904S/7-03
© 2003,USGInteriors,Inc.
Printed in U.S.A.