

BENNER PRODUCTS

2026-2027

PRODUCT CATALOGUE

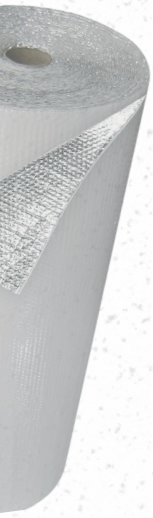


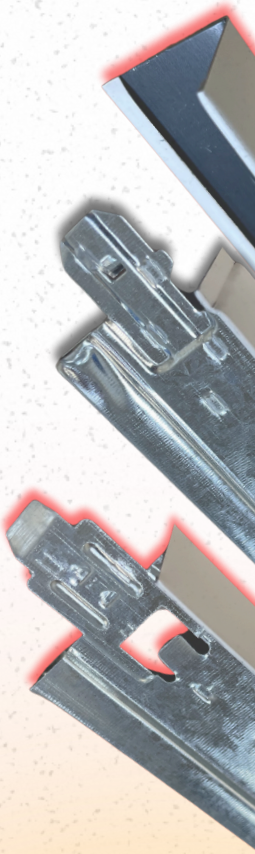

HIGH EFFICIENCY

LOW MAINTENANCE



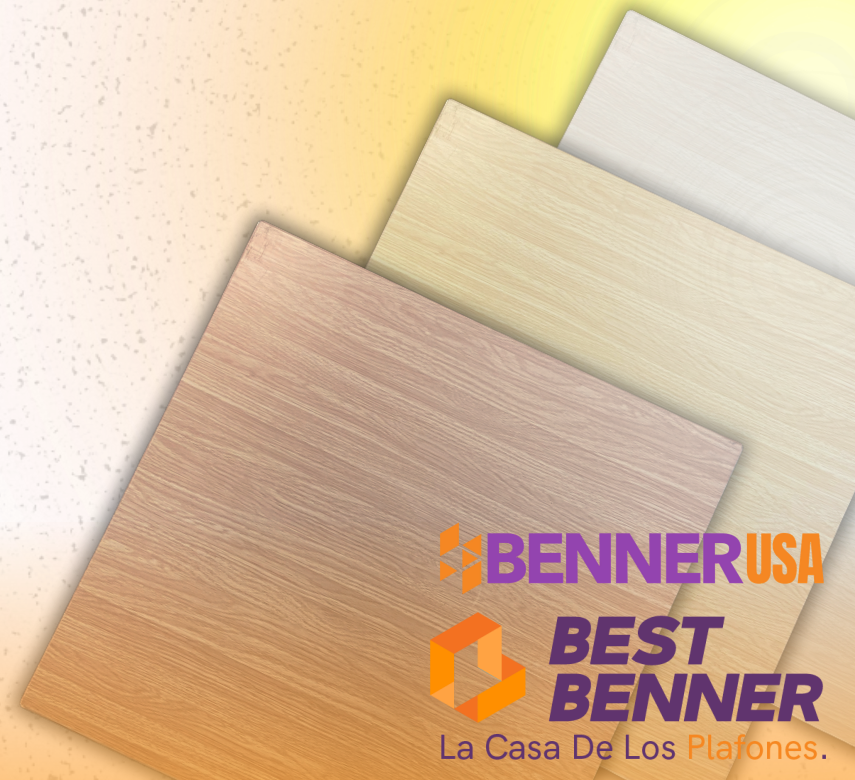

BENNERUSA

BEST BENNER

La Casa De Los Plafones.

Benner Products: Smart Building Materials for a Sustainable Future

At Benner Products®, we specialize in intelligent building materials that are designed for high performance and low maintenance. Whether you're building a home, a commercial building, or a public space, we have the solutions you need to create a healthy, inviting, and stylish environment for your customers and employees.

We offer an exceptional selection of high-quality building materials, including a wide range of innovative and eco-friendly acoustic ceiling solutions, suspension systems, hardware, screws and fasteners, insulation wraps and lighting products. Our products are designed to meet the needs of today's discerning builders and architects, and they are backed by our commitment to quality and customer service.

Benner Products is excited to showcase our newest product lines, as well as the innovative solutions from our valued collaborators.

BENNER ACOUSTIC CEILINGS

BENNER ALUMINUM CEILING TILES

BENNER SUSPENSION SYSTEM

BENNER LIGHTING

BENNER TOUGH-TIE

BENNER FASTENING

BENNER COMMERCIAL TAPES

BENNER REFLECTIVE INSULATION

BENNER PRODUCTS

BENNER METAL FRAMING

BENNER COATINGS

www.bennerproducts.com

BENNER ALUMINUM CEILINGS




Lay-In

Clip-In

Alu-Baffle

Linear Panels

BENNER PRODUCTS

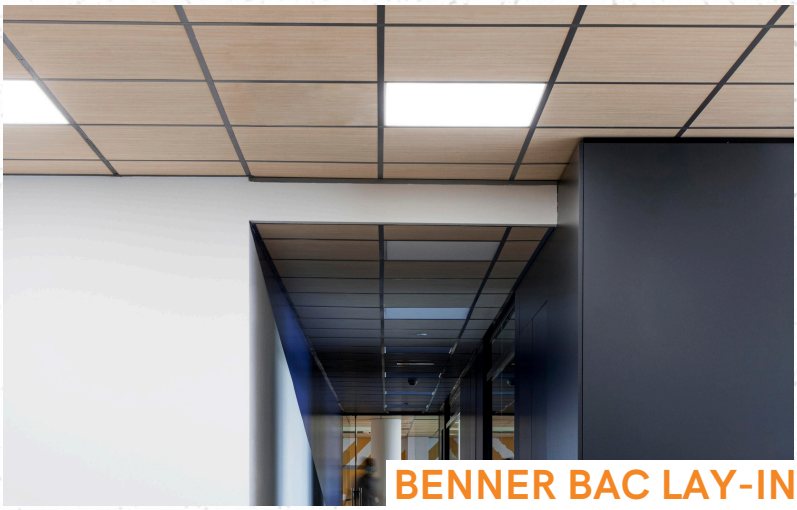

BENNER BAC LAY-IN



BENNER BAC CLIP-IN



BENNER BAC C-SHAPE



BENNER BAC G-SHAPE



BENNER BAC C-85



BENNER ALU-BAFFLE

Our exceptional selection includes a wide range of innovative and environmentally friendly acoustic ceiling solutions. All our models offer a unique combination of functional and aesthetic features designed to accommodate a wide range of architectural needs.

We achieve the highest performance:



These products have the following features:

AIA


U.S. GREEN BUILDING COUNCIL MEMBER


WARRANTY 30 YEAR WARRANTY

PET FRIENDLY


www.bennerproducts.com

BENNER BAC LAY-IN

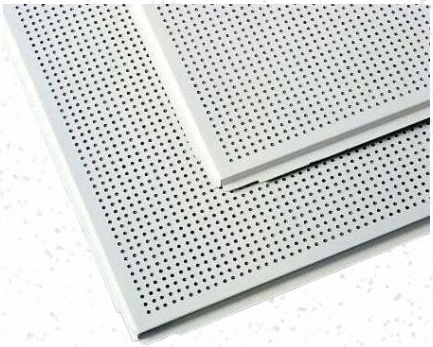



#116 - 38H T-grid



Beveled Tegular Edge

ITEM	Qty / Box	Width	Length	ASTM Classification	NRC	CAC	Fire Performance	Light Reflectance Value (LRV)	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Soundtex Tissue	Perforated	Suspension System
6110	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	T-Grid 15/16"
6111	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	T-Grid 15/16"
6112	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	T-Grid 15/16"
6113	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	T-Grid 15/16"
6114	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	T-Grid 15/16"
6115	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	T-Grid 15/16"
6116	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	T-Grid 15/16"
6117	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	T-Grid 15/16"
6118	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	T-Grid 15/16"
6119	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	T-Grid 15/16"

Color

MOQ: 25 BOXES (500 PIECES)


TILE PATTERNS




BAC #39 BAC #40 BAC #42 BAC #41 BAC #43


Code	Type	Dimension
#116-38H T-grid (15/16 SYSTEM)	Main T	1 ½" x 15/16" x 144"
	Cross T	1 ½" x 15/16" x 24" 1 ½" x 15/16" x 48"
#116-38H T-grid (9/16 SYSTEM)	Main T	1 ½" x 9/16" x 144"
	Cross T	1 ½" x 9/16" x 24" 1 ½" x 9/16" x 48"
Wall Molding	L shape	25/32" x 25/32" x 142"

BENNER BAC CLIP-IN

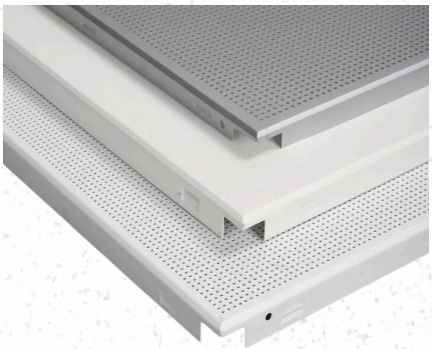





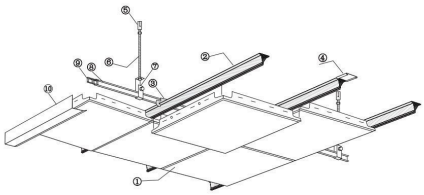

ITEM	Qty / Box	Width	Length	ASTM Classification	NRC	CAC	Fire Performance	Light Reflectance Value (LRV)	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Soundtex Tissue	Perforated	Suspension System
6210	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	Clip-In
6211	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	Clip-In
6212	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	Clip-In
6213	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	Clip-In
6214	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	Clip-In
6215	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	Clip-In
6216	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	Clip-In
6217	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	Clip-In
6218	20	24"	24"	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	Clip-In
6219	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	Clip-In
6220	20	24"	24"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	Clip-In
6221	20	24"	72"	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	Clip-In

Color

MOQ: 25 BOXES (500 PIECES)

TILE PATTERNS




BAC #39 BAC #40 BAC #42 BAC #41 BAC #43


Code	Type	Dimension
BAC 45	38# GA.20 Rolled Channel	1 ½" x 144"
	Tee Carrier	1 ½" x 120"
Wall Molding	L shape	7/8" x 7/8" x 142"

References:


- Noise Reduction Coefficient (NRC) - ASTM C423 / Classified with UL label
- Ceiling Attenuation Class (CAC) - ASTM E1414 / Classified with UL label
- Fire resistance - ASTM E84 / Flame Spread - ASTM E1264
- Light Reflectance - ASTM E1477
- Humidity Resistance (HR) - ASTM C367
- Microbial Resistance (MR) - ASTM D6329
- Air Quality Standards - ASTM D5116

CLIP-IN

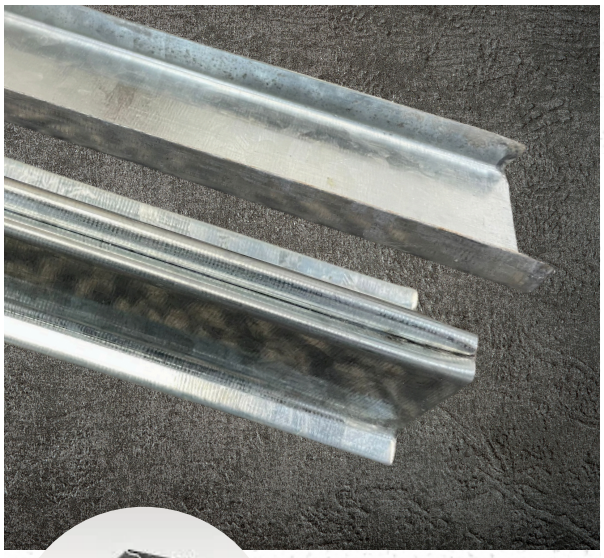

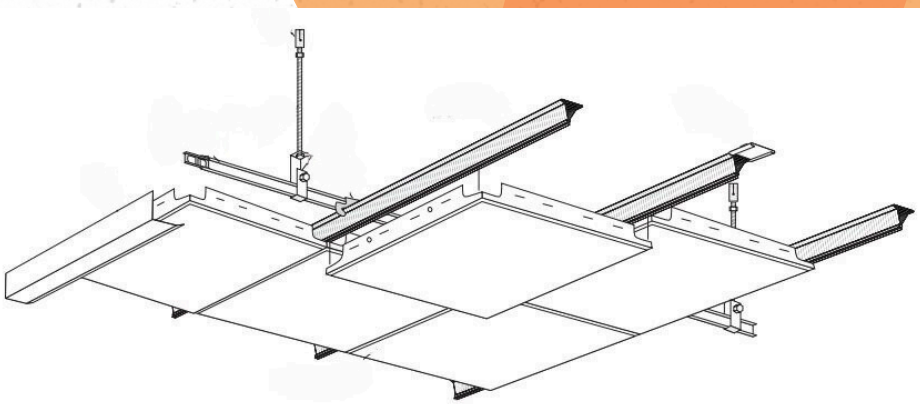





Profile	ITEM	Qty / Box	Thickness	Width	Length	Heavy Duty category (ASTM C635)	Compression / Tension	Galvanised steel	Expose System	Recycled Content
Clip In - BAC 45 - Panel Carrier	5310	20	7/8"	1-1/2"	120"	Yes	N/A	Yes	No	Yes
Clip-In Hanger	5331	100	--	7/8"	3-7/8"	Yes	N/A	Yes	No	Yes
38# GA.20 Rolled Channel	5317	20	3/8"	1-1/2"	144"	Yes	N/A	Yes	No	Yes
Panel Carrier Connector	5326	100	1/4"	1-1/2"	2-1/4"	Yes	N/A	Yes	No	Yes


*Included with the ceiling purchase


Components

Rolled Channel



Clip-In Panel Carrier



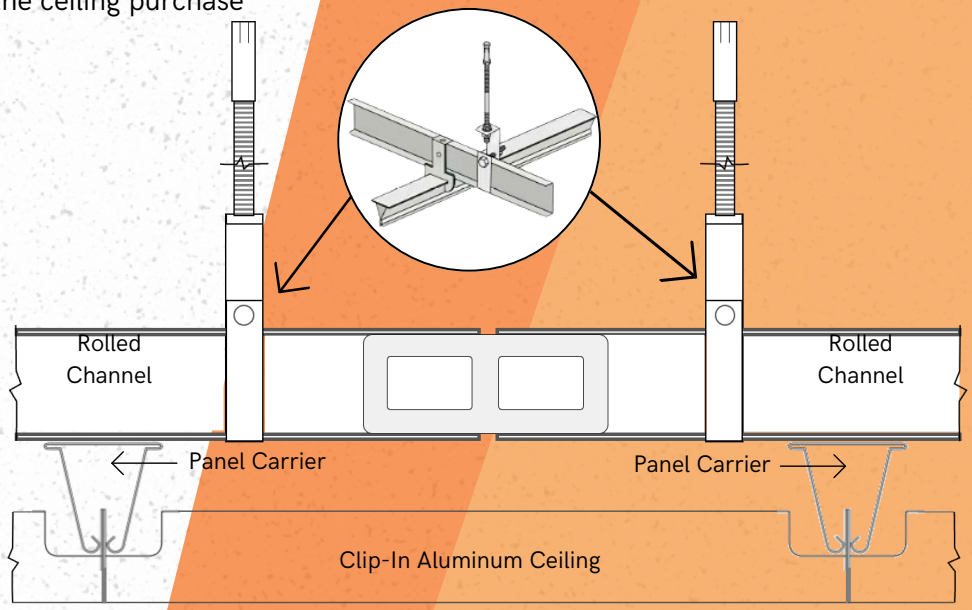



Accessories

Clip-In Hanger





Panel Carrier Connector




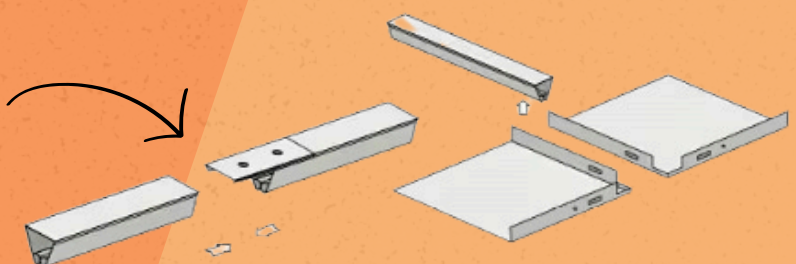


BENNER BAC C-SHAPE

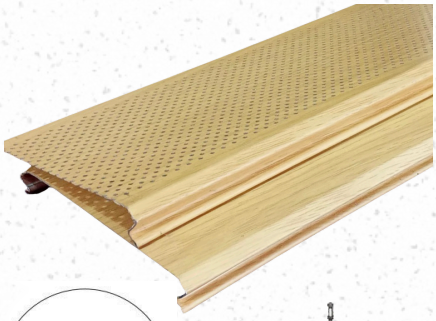








ITEM	Qty / Box	Width	Length	ASTM Classification	NRC	CAC	Fire Performance	Light Reflectance Value (LRV)	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Soundtex Tissue	Perforated	Suspension System
6310	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	C-shape
6311	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	C-shape
6316	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	C-shape
6317	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	C-shape
6318	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	C-shape
6319	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	C-shape

Color

MOQ: 25 BOXES (500 PIECES)

Code	Type	Dimension
BAC 48	38# GA.20 Rolled Channel	1 ½" x 144"
	CS Panel Carrier	1 ½" x 120"
Wall Molding	L shape	7/8" x 7/8" x 142"


BENNER BAC G-SHAPE

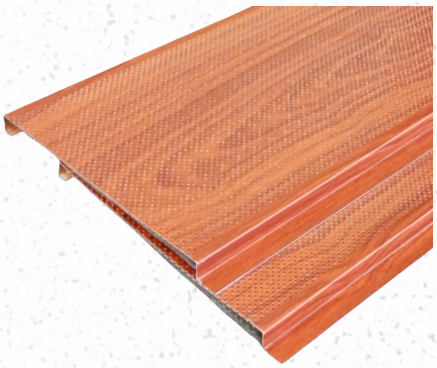



ITEM	Qty / Box	Width	Length	ASTM Classification	NRC	CAC	Fire Performance	Light Reflectance Value (LRV)	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Soundtex Tissue	Perforated	Suspension System
6410	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	G-shape
6416	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	G-shape
6417	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	G-shape
6418	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	G-shape
6419	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	G-shape

Color

MOQ: 25 BOXES (500 PIECES)







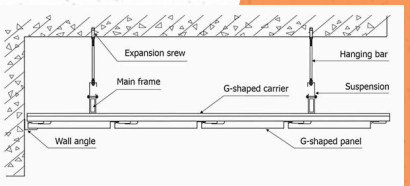

Code	Type	Dimension
BAC 50	38# GA.20 Rolled Channel	1 ½" x 144"
	GS Panel Carrier	1 ½" x 120"
Wall Molding	L shape	7/8" x 7/8" x 142"

BENNER BAC C-85

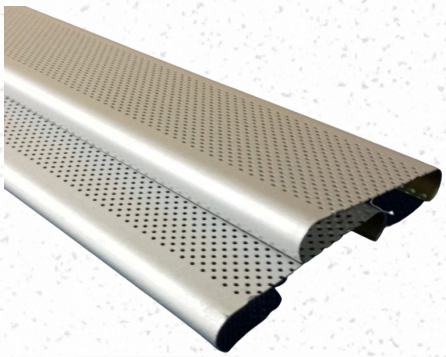




ITEM	Qty / Box	Width	Length	ASTM Classification	NRC	CAC	Fire Performance	Light Reflectance Value (LRV)	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Soundtex Tissue	Perforated	Suspension System
6510	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	C85
6511	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	C85
6512	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	C85
6513	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	C85
6514	20	4"	12'	Type III	0.75	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	Yes	C85
6515	20	4"	12'	Type III	0.10	40	Class A	0.83	Very High	Very High	Yes	Very High	Yes	No	C85

Color

MOQ: 25 BOXES (500 PIECES)






Code	Type	Dimension
C-85	38# GA.20 Rolled Channel	1 ½" x 144"
	G85 Panel Carrier	1 ½" x 120"
Wall Molding	L shape	7/8" x 7/8" x 142"

LINEAR PANELS



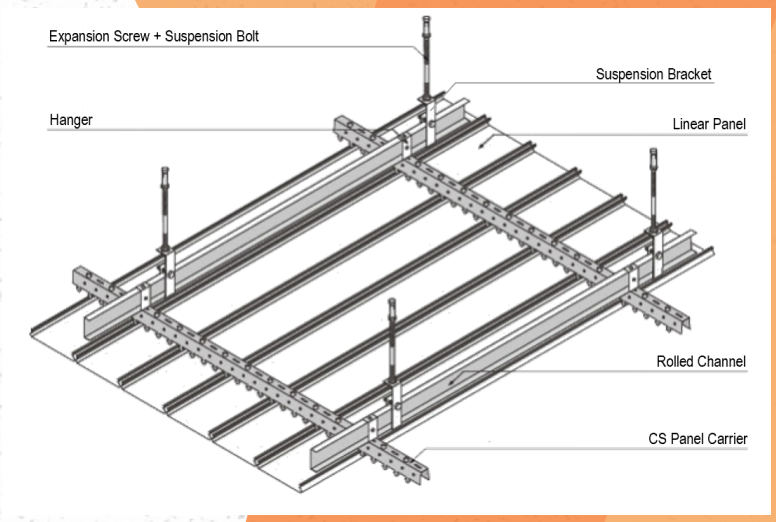


All linear panel systems use the same rolled channel and fastening elements. They only differ in the type of main carrier, which is the profile that carries the decorative panel.

Components

Rolled Channel



C-Shape Panel Carrier



G-Shape Panel Carrier




C-85 / V-85 Panel Carrier




Profile	ITEM	Qty / Box	Thickness	Width	Length	Heavy Duty category (ASTM C635)	Compression / Tension	Galvanised steel	Expose System	Recycled Content
Linear C-Shape - BAC 48 - Panel Carrier	5313	20	7/8"	1-1/2"	120"	Yes	N/A	Yes	No	Yes
Linear G-Shape - BAC 50 - Panel Carrier	5314	20	7/8"	1-1/2"	120"	Yes	N/A	Yes	No	Yes
Linear C85 Panel Carrier	5315	20	7/8"	1-1/2"	120"	Yes	N/A	Yes	No	Yes
Linear V85 Panel Carrier	5316	20	7/8"	1-1/2"	120"	Yes	N/A	Yes	No	Yes
38# GA.20 Rolled Channel	5317	20	3/8"	1-1/2"	144"	Yes	N/A	Yes	No	Yes
Accessories										
Expansion Screw	5320	100	--	3/8"	--	Yes	N/A	Yes	No	Yes
Suspension Bolt	5321	100	--	3/8"	1-5/16"	Yes	N/A	Yes	No	Yes
T-Grid Hanger	5322	100	--	7/8"	3-7/8"	Yes	N/A	Yes	No	Yes
C-Shape Hanger	5332	100	--	7/8"	3-7/8"	Yes	N/A	Yes	No	Yes
G-Shape Hanger	5333	100	--	7/8"	3-7/8"	Yes	N/A	Yes	No	Yes
C-58/V-85 Hanger	5334	100	--	7/8"	3-7/8"	Yes	N/A	Yes	No	Yes
38# Main Carrier Suspension Bracket	5323	50	--	7/8"	3-7/8"	Yes	N/A	Yes	No	Yes
Main Carrier Connector	5326	20	--	1-7/16"	4-1/8"	Yes	N/A	Yes	No	Yes
Anchor	5329	20	--	3/8"	7/8"	Yes	N/A	Yes	No	Yes
Linear Panel coupling unit	5330	100	3/8"	3-3/4"	4"	Yes	N/A	Yes	No	Yes

Accessories


*Included with the ceiling purchase

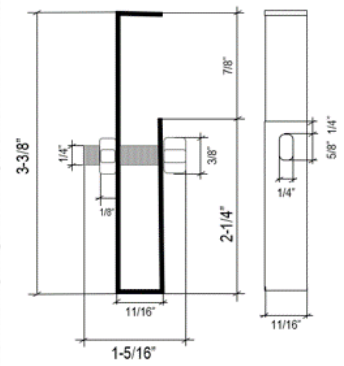


Suspension Bracket

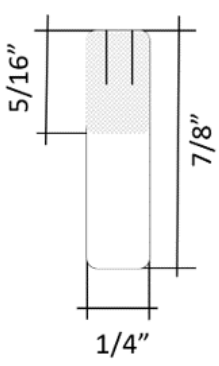


Anchor

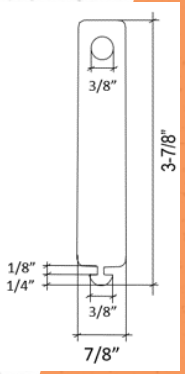

Hanger

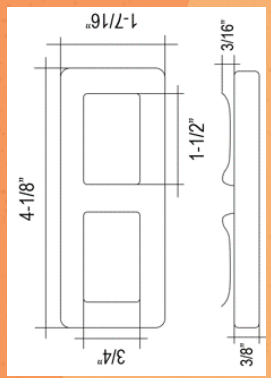


Main Carrier Connector

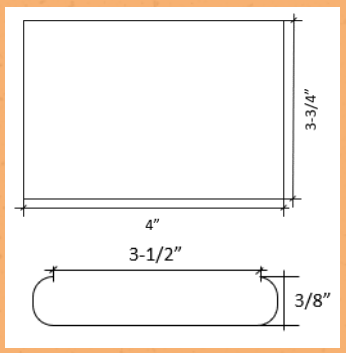

Linear Panel Coupling Unit

BENNER ALU-BAFFLE



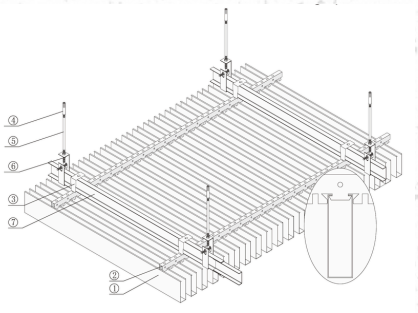

ITEM	Qty / Box	Width	Heights	Length	ASTM Classification	NRC	CAC	Fire Performance	Light Reflectance Value (LRV)	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Soundtex Tissue	Perforated	Suspension System
6601	20	25 mm (0.98")	50 mm (1.97")	1000 mm (3.28') 3000 mm (9.84')	Shape	NP - 0.10	40	Class A	0.83	Very High	Very High	Very High	Yes	Yes	No	38 HD AB
6602	20	30 mm (1.18")	39 mm (1.54")	1000 mm (3.28') 3000 mm (9.84')	Shape	NP - 0.10	40	Class A	0.83	Very High	Very High	Very High	Yes	Yes	No	38 HD AB
6603	20	40 mm (1.57")	50 mm (1.97")	1000 mm (3.28') 3000 mm (9.84')	Shape	NP - 0.10	40	Class A	0.83	Very High	Very High	Very High	Yes	Yes	No	38 HD AB
6604	20	50 mm (1.97")	50 mm (1.97")	1000 mm (3.28') 3000 mm (9.84')	Shape	NP - 0.10	40	Class A	0.83	Very High	Very High	Very High	Yes	Yes	No	38 HD AB
6605	20	100 mm (3.94")	100 mm (3.94")	1000 mm (3.28') 3000 mm (9.84')	Shape	NP - 0.10	40	Class A	0.83	Very High	Very High	Very High	Yes	Yes	No	38 HD AB

Color

MOQ: 25 BOXES (500 PIECES)

Code	Type	Dimension
BAC 48	38# GA.20 Rolled Channel	1 ½" x 144"
	CS Panel Carrier	1 ½" x 120"
Wall Molding	L shape	7/8" x 7/8" x 142"

Aluminum Baffle Linear Panels available heights options:		
6601 - Alu-Baffle 25	60 mm (2.36") 70 mm (2.76") 80 mm (3.15") 90 mm (3.54")	100 mm (3.94") 110 mm (4.33") 120 mm (4.72")
6602 - Alu-Baffle 30	45 mm (1.77") 60 mm (2.36") 80 mm (3.15")	90 mm (3.54") 100 mm (3.94")
6603 - Alu-Baffle 40	60 mm (2.36") 70 mm (2.76") 80 mm (3.15") 90 mm (3.54")	100 mm (3.94") 110 mm (4.33") 120 mm (4.72")
6604 - Alu-Baffle 50	60 mm (2.36") 70 mm (2.76") 80 mm (3.15") 90 mm (3.54")	100 mm (3.94") 110 mm (4.33") 120 mm (4.72")
6605 - Alu-Baffle 100	60 mm (2.36") 70 mm (2.76") 80 mm (3.15") 90 mm (3.54")	100 mm (3.94") 110 mm (4.33") 120 mm (4.72")

COLOR OPTIONS:

Standard colors:




Specialty colors:




Specialty colors are subject to a minimum order of 5,000 square feet.

COLOR CHART - ALUMINUM TILES

Specialty colors:

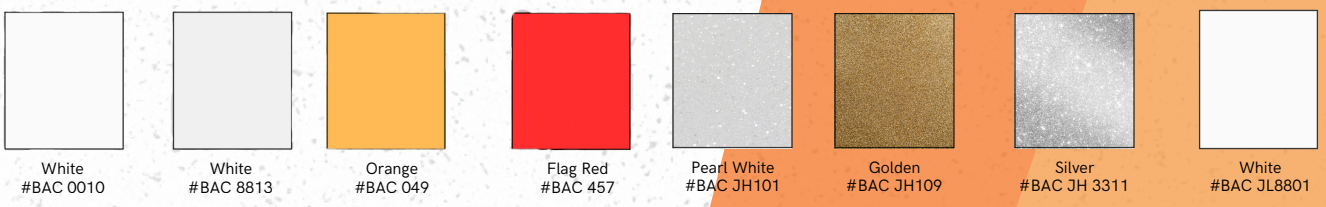

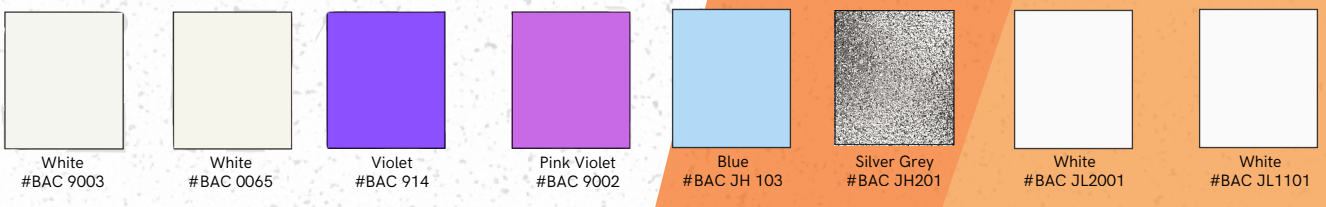











COLOR CHART - ALUMINUM TILES

Specialty colors:

SPECIALTY COLORS

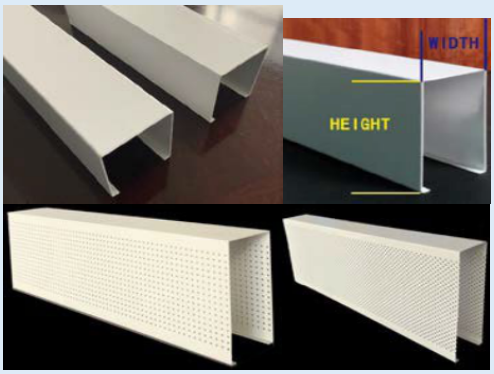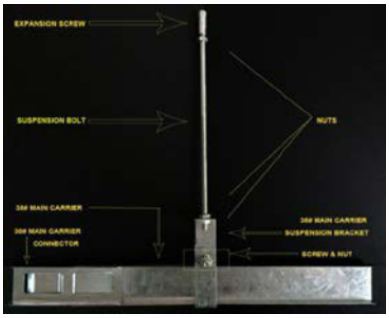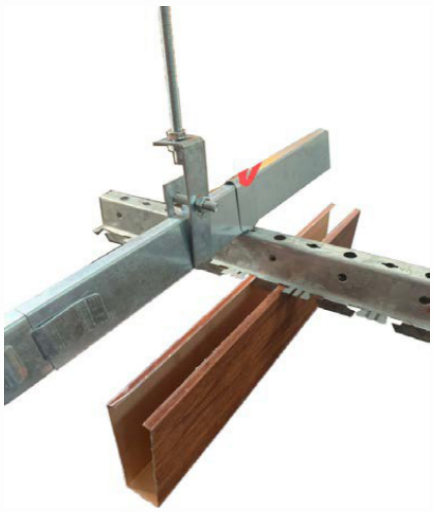

(1) No.	Name of Commodity and Specifications	Photos
A	**Cold-rolled aluminum baffle ceiling, plain, non-perforated, no caps, standard, 2.9M/PC or 3m/pc, panel only**	
a	25 mm width,100 mm height, powder coating white color finished thickness 0.9 mm, plain	
b	25mm width,100 mm height, prepainted wood color finished thickness 0.8 mm, plain, with film	
c	25mm width,100 mm height, powder coating white color finished thickness 0.9 mm, side perforated dia 1.8mm in diagonal or straight line, no tissue	
d	25mm width,100 mm height, prepainte wood color finished thickness 0.8 mm, side-perforated, 1.8 mm in diameter in a diagonal or straight-line pattern, no tissue, with film	
2	**accessories**	
a	Strip Panel carrier, 1.2m / sqm, 3m / pc, in metal color	
b	Strip Panel Suspension bracket, 2pcs / sqm	
c	Ø6 mm suspension bolt，1m / pc, 1m / sqm	
d	Ø6 mm expansion screw，1pc / sqm	
e	Ø6 mm nut，3pcs / sqm	
f	Ø6mm screw and nut，1set/sqm	
g	38＃ main carrier suspension bracket,1pc / sqm	
h	38＃ main carrier connector, 0.4pc / sqm	
i	38＃ main carrier, 1m / sqm, 3m / pc	
		

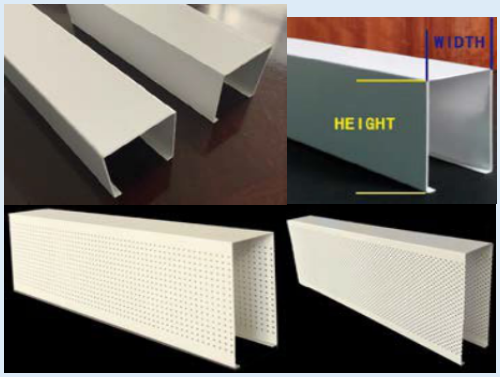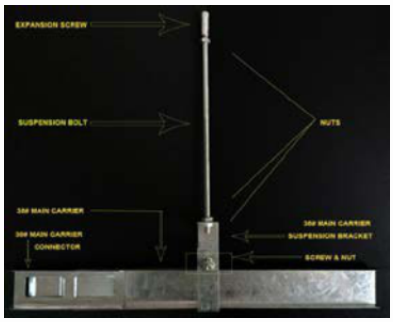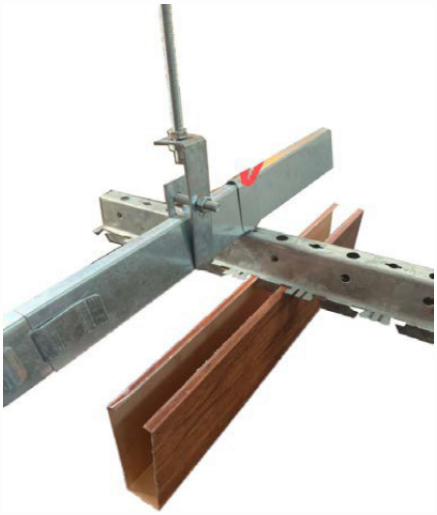(1) No.	Name of Commodity and Specifications	Photos
A	**Cold-rolled aluminum baffle ceiling, plain, non-perforated, no caps, standard 2.9M/PC or 3m/pc, panel only**	
a	25 mm width,150 mm height, powder coating white color finished thickness 0.9 mm, plain	
b	25 mm width,150 mm height, prepainted wood color finished thickness 0.8 mm, plain. with film	
c	25mm width,150 mm height, powder coating white color finished thickness 0.9 mm, side perforated dia 1.8 mm in diagonal or straight line, no tissue	
d	25mm width,150 mm height, prepainted wood color finished thickness 0.8 mm, side-perforated, 1.8 mm in diameter in a diagonal or straight-line pattern, no tissue. with film	
2	**accessories**	
a	Strip Panel carrier, 1.2m / sqm, 3m / pc, in metal color	
b	Strip Panel Suspension bracket, 2pcs / sqm	
c	Ø6 mm suspension bolt，1m / pc, 1m/sqm	
d	Ø6 mm expansion screw，1pc /sqm	
e	Ø6 mm nut，3pcs / sqm	
f	Ø6 mm screw and nut，1set / sqm	
g	38＃ main carrier suspension bracket, 1pc / sqm	
h	38＃ main carrier connector, 0.4 pc / sqm	
i	38＃ main carrier, 1m/sqm, 3m/pc	
		

ACOUSTIC CEILINGS



MINERAL FIBER

FIBERGLASS

USG

BENNER PRODUCTS



BENNERWINTER



BENNERDU



BENNERLAST



BENNERFINE



BENNERGLASS PRO



BENNERGLASS



BENNERPVC

Our exceptional selection includes a wide range of innovative and environmentally friendly acoustic ceiling solutions. All our models offer a unique combination of functional and aesthetic features designed to accommodate a wide range of architectural needs.

AIA


U.S. GREEN BUILDING COUNCIL MEMBER

WARRANTY 30 YEAR WARRANTY

PET FRIENDLY

www.bennerproducts.com

BENNERWINTER

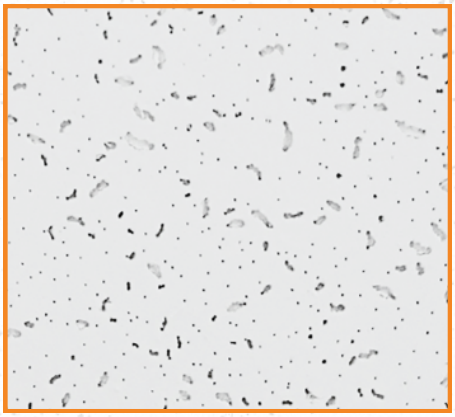


Material: Wet-formed mineral fiber
Surface finish: Factory-applied vinyl latex paint / smooth


Mineral Fiber

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	Color
1110	10	5/8"	24"	24"	SQ	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"	
1111	10	5/8"	24"	24"	BT	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"	
1112	10	5/8"	24"	24"	SQ	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"	
1113	10	5/8"	24"	48"	SQ	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"	
1114	10	5/8"	24"	48"	SQ	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"	
1115	10	5/8"	24"	48"	BT	0.55	34	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"	

Material:



Available Edges:





BENNERDU




Material: Wet formed mineral fiber
Surface finish: Factory applied vinyl latex paint / sanded texture


Mineral Fiber

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	Color
1210	10	5/8"	24"	24"	SQ	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"	
1211	10	5/8"	24"	24"	BT	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"	
1212	10	5/8"	24"	48"	SQ	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"	
1213	10	5/8"	24"	48"	BT	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 15/16"	
1214	10	5/8"	24"	24"	BT	0.5	35	Class A	0.83	80-99%	Very High	Yes	Very High	T-Grid 9/16"	

Material:



Available Edges:





BENNERLAST




Material: Wet formed mineral fiber & fiberglass tissue
Surface finish: Factory applied vinyl latex paint / fine texture

Mineral Fiber


ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	Color
1510	10	5/8"	24"	24"	SQ	0.65	36	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"	
1514	10	3/4"	24"	24"	BT	0.75	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"	

Material:




Available Edges:





BENNERFINE

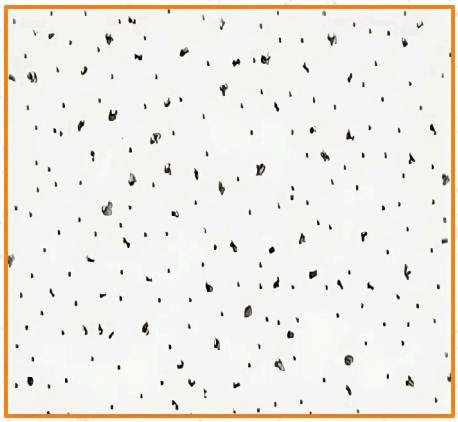


Material: Wet formed mineral fiber
Surface finish: Factory applied vinyl latex paint / smooth

Mineral Fiber

ITEM	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
1410	5/8"	24"	24"	SQ	0.55	35	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"
1411	5/8"	24"	24"	BT	0.55	35	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"
1412	5/8"	24"	48"	SQ	0.55	35	Class A	0.85	70-90%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:




Available Edges:





BENNERSOFT

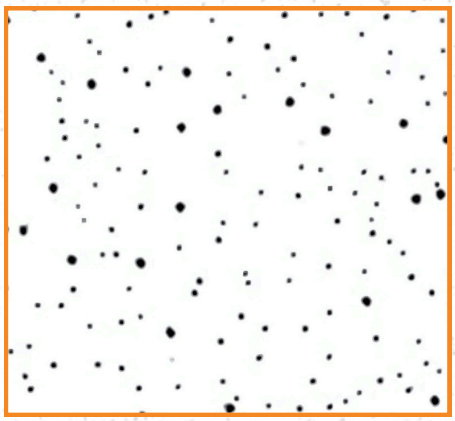


Material: Wet formed mineral fiber
Surface finish: Factory applied vinyl latex paint / smooth

Mineral Fiber


Product	ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
BennerSoft	1710	10	5/8"	24"	24"	SQ	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1711	10	5/8"	24"	24"	BT	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1712	10	5/8"	24"	48"	SQ	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1713	10	5/8"	24"	48"	BT	0.55	35	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1714	10	3/4"	24"	24"	SQ	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1715	10	3/4"	24"	24"	BT	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1716	10	3/4"	24"	48"	SQ	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"
BennerSoft	1717	10	3/4"	24"	48"	BT	0.70	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:



Available Edges:





BENNERGLASS PRO




Material: Fiberglass with white transparent membrane
Surface finish: Fiberglass tissue & factory latex paint / lightly textured

Fiberglass


ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System
2114	10	1"	24"	24"	SQ	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"
2115	10	1"	24"	24"	BT	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"
2116	10	1"	24"	48"	SQ	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"
2117	10	1"	24"	48"	BT	0.90	30	Class A	0.88	95-99%	Very High	Yes	Very High	T-Grid 15/16"

Color

Material:



Available Edges:



References:

- Noise ReductionCoefficient(NRC) - ASTM C423 / Classified with ULlabel
- CeilingAttenuationClass(CAC) - ASTM E1414 / Classified with ULlabel
- Fire resistance - ASTM E84 / Flame Spread - ASTM E1264
- Light Reflectance - ASTM E1477
- Humidity Resistance (HR) - ASTM C367
- Microbial Resistance (MR) - ASTM D6329
- Air Quality Standards - ASTM D5116

BENNERGLASS



Material: Fiberglass with white transparent membrane

Surface finish: Fiberglass tissue & factory latex paint / light textured


Fiberglass

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	Color
1610	10	5/8"	24"	24"	SQ	0.6	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"	
1611	10	5/8"	24"	48"	SQ	0.6	40	Class A	0.85	95-99%	Very High	Yes	Very High	T-Grid 15/16"	

Material:



Available Edges:



BENNERPVC




Material: Gypsum Board Substrate
Surface finish: Fiberglass tissue & factory latex paint / softly textured

Gypsum Board

ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Light Reflect	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	Color
3111	10	3/8"	24"	24"	SQ	N/A	35	Class A	0.75	95-99%	Very High	Yes	Very High	T-Grid 15/16"	
3112	8	3/8"	24"	48"	SQ	N/A	35	Class A	0.75	95-99%	Very High	Yes	Very High	T-Grid 15/16"	

Material:



Available Edges:



References:

- Noise Reduction Coefficient (NRC) - ASTM C423 / Classified with UL label
- Ceiling Attenuation Class (CAC)- ASTM E1414 / Classified with UL label
- Fire resistance - ASTM E84 / Flame Spread - ASTM E1264
- Light Reflectance - ASTM E1477
- Humidity Resistance (HR) - ASTM C367
- Microbial Resistance (MR) - ASTM D6329
- Air Quality Standards - ASTM D5116

USG CEILING




USG Mars™ Healthcare Acoustical Panels
+ USG Donn® DX®/DXL™ Acoustical Suspension System
Shape Therapeutics Lab
Architect: ZGF Architects
Photo: © Moris Moreno

USG Ceiling Solutions

USG CEILING SOLUTIONS COLOR PROGRAM

STANDARD COLORS


STANDARD COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS[1, 4]

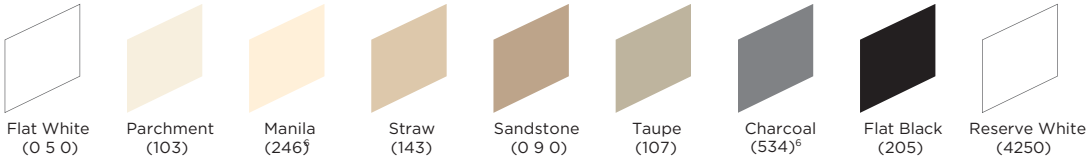

Flat White (0 5 0) | Parchment (103) | Manila (246)[6] | Straw (143) | Sandstone (0 9 0) | Taupe (107) | Charcoal (534)[6] | Flat Black (205) | Reserve White (4250)

ADVANTAGE COLORS

ADVANTAGE COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS[1, 4]

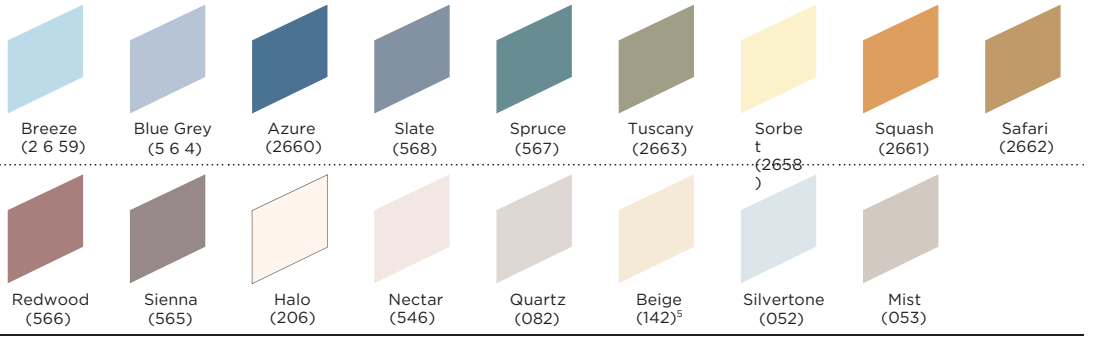

Breeze (2 6 59) | Blue Grey (5 6 4) | Azure (2660) | Slate (568) | Spruce (567) | Tuscany (2663) | Sorbet (2658) | Squash (2661) | Safari (2662)

Redwood (566) | Sienna (565) | Halo (206) | Nectar (546) | Quartz (082) | Beige (142)[5] | Silvertone (052) | Mist (053)

PREMIUM COLORS

PREMIUM COLORS FOR CEILING PANELS AND SUSPENSION SYSTEMS[1,4]



Dawn (3679) | Old Stone (3691) | Sea Shell (3678) | Light Brown (3690) | Nut Brown (3680) | Peat (3682) | Shale (3683) | Ocean Ridge (3684) | Atmosphere (3681)

Laguna (3685) | Grass (3688) | Tangy Taleia (3689) | Deep Cranberry (3687) | Deep Violet (3686) | Deep Berry (3693) | Deep Blue (3692) | Flat Black (205)


SUSPENSION SYSTEMS ONLY

STANDARD COLORS



Silver Satin (002) | Plated Brass (065)[2] | Plated Chrome (066)[2]

ADVANTAGE COLORS



Galvanized Low Gloss Clear (3287)[3]

POWDER COATED FINISH



Powder White (3767)

CUSTOM COLOR MATCHING



Note
Please consult your USG/CGC sales representative for custom colors. USG will match colors from most major paint manufacturers. The plant must review all colors not listed in the color programs to determine manufacturing capability.

Notes

1. Samples shown are representative of colors for tile and grid only. Color may vary on specialty products.
2. Brass and Chrome available in USG Donn® Brand DX®/ USG Donn® Brand DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C. Brass and Chrome cross tees available only in DXD™-type butt-cut ends. Shadow moldings are not available in Brass and Chrome.
3. Galvanized Low Gloss Clear is available in USG Donn® Brand DX® / USG Donn® Brand DXL™ Acoustical Suspension System only. Galvanized steel with a low gloss clear finish coat can vary significantly from lot to lot. This is due to the inherent differences in the hot-dipped galvanization coating process.
4. Grid colors applied to the visible cap only. For 360° painting, consult the Specialty Ceiling System price list. Moldings are painted on the exposed horizontal leg.
5. Beige is a Standard color for CGC Donn® Brand Suspension Systems.
6. Manila and Charcoal are Advantage not Standard colors for CGC Donn® Brand Suspension Systems.

USG COLOR PROGRAM FOR ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com **CGC:**
contact Sales Representative

TECHNICAL SERVICES
800USG.4YOU(874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

AVAILABLE PANELS	Item No.	Size	Edge	Standard Colors[8]		Advantage Colors[8]		Premium Colors[8]		Sq. Ft./ Carton	Color Options
				Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days	Min. Sq. Ft.	Lead Time Days		
USG ECLIPSE™ CLIMAPLUS™ (SC1812)	**76975**	2′x 2′x3/4″	FL	48	10	48	10	—	—	48	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
	76775	2′x 2′x3/4″	SLT	48	10	48	10	—	—	48	
USG FROST™ (SC1968)	**414**	2′x 2′x3/4″	SLB	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	418	2′x 2′x3/4″	FL	32	10	2,688	15	2,688	15	32	
	419	2′x 2′x3/4″	FLB	32	10	2.688	15	2,688	15	32	
USG GLACIER™ BASIC (SC1819)	**707**	2 x 2′x3/4″	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	708	2 x 2′x3/4″	FL	32	10	2,688	15	2,688	15	32	
USG MARS™ HIGH-NRC/HIGH-CAC (SC2487)	**88137**	2′x2′x1″	SQ	32	30-45	32	30-45	32	30-45	32	Premium colors offered. Standard and Advantage colors are all considered "Custom" for pricing.
	88138	2′x2′x1″	SLT	32	30-45	32	30-45	32	30-45	32	
	88139	2′x2′x1″	FLB	32	30-45	32	30-45	32	30-45	32	
	88134	2′x2′x7/8″	SQ	40	30-45	40	30-45	40	30-45	40	
	88135	2′x2′x7/8″	SLT	40	30-45	40	30-45	40	30-45	40	
	88136	2′x2′x7/8″	FLB	40	30-45	40	30-45	40	30-45	40	
	86186	2′x 2′x3/4″	SQ	48	30-45	48	30-45	48	30-45	48	
	86786	2′x 2′x3/4″	SLT	48	30-45	48	30-45	48	30-45	48	
	86986	2′x 2′x3/4″	FLB	48	30-45	48	30-45	48	30-45	48	
USG PREMIER HI-LITE™ KAPOK (SC1838)	**7054G**	2′x2′x5/8″	SQ	128	10	—	—	—	—	128	White and Flat Black only.
	7055G	2′x4′x5/8″	SQ	128	10	—	—	—	—	128	
	7056G	2′x2′x5/8″	SQ	128	10	—	—	—	—	128	
	7057G	2′x4′x5/8″	SQ	128	10	—	—	—	—	128	
USG RADAR™ (SC2127)	**2210**	2′x2′x5/8″	SQ	64	10	64	10	—	—	64	Standard colors. Advantage: Beige, Mist, Silvertone only.
	2220	2′x2′x5/8″	SLT	64	10	64	10	—	—	64	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
	2410	2′x4′x5/8″	SQ	64	10	64	10	—	—	64	Standard colors. Advantage: Beige, Mist, Silvertone only.
USG RADAR™ ILLUSION™ TWO/24 (SC2127)	**2842**	2 ′x4′x3/4″	SLT	48	10	48	10	—	—	48	Standard colors (Flat Black and Charcoal not available.) Advantage: Beige, Mist, Silvertone only.
USG RENDITIONS™ ANIMATIONS (IC327), **USG RENDITIONS™ BOUNDARIES** (IC332) **AND USG RENDITIONS™ CUSTOM FROST™ PANEL** (CLIMAPLUS™NOT AVAILABLE) (IC356)	**Various**	2′x 2′x3/4″	SLB,	32	15	2,688	20	2,688	20	32	White, Standard, Advantage and Premium colors. (Advantage are 2,688 min. sq. ft.) **Note** Custom colors are 25-day minimum lead timefor USG Frost™.
USG SANDRIFT™ (SC1841)	**808**[7]	2′x 2′x3/4″	SL	32	5	2,688	15	2,688	15	32	Standard, Advantage and Premium colors. Colors outside the Standard, Advantage and Premium programs are subject to approval by plants.
	809[7]	2′x 2′x3/4″	FL	32	10	2,688	15	2,688	15	32	

7. To highlight the unique texture of USG Sandrift™ Acoustical Panels, choose light colors.
8. For colors, it is not recommended to mix date codes or lot numbers.

USG Ceiling Solutions


USG DRYWALL SUSPENSION SYSTEM



USG Drywall Suspension System / USG Sheetrock® Brand Gypsum Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PROFILE



FEATURES AND BENEFITS

- Installs faster than traditional framing methods.
- More than 60 UL fire-resistive designs.
- Assemblies available to meet STC and IIC requirements.
- Easily frames openings for Type F and Type G light fixtures.
- Evaluated for building code compliance according to ICC ESR-4358.
- G90 galvanization available for a variety of environmental conditions including exterior ceiling systems.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

APPLICATIONS

- Exterior ceilings
- Fire-rated and non-fire-rated interior gypsum board ceilings

USG CGC

IT'S YOUR WORLD. BUILD IT.™

USG COLOR PROGRAM FOR SUSPENSION SYSTEMS

ORDER SAMPLES/LITERATURE
USG: samplit@usg.com **CGC:**
contact Sales Representative

TECHNICAL SERVICES
800USG.4YOU(874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL

usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

STANDARD, ADVANTAGE, PREMIUM COLORS

- All standard products seen below are available within 15 days unless otherwise noted:
  - -AX™
  - -DXT™/DXLT™
  - -DX®/DXL™
  - -DXLA™
  - -DXF™/DXLF™
  - -DXFF™
  - -DXI™
  - -ZXLA™

- One-carton minimum for suspension systems.
- Suspension systems have color caps only.
- For 360° painting, consult the Specialty Ceiling System price list.
- Moldings are painted on the exposed horizontal leg.
- All metric items are offered in Flat White, USG service level C and CGC service level B. MEDXF3600, MEDXF600 and MEDXF1200N also offered in Flat White with Black Reveal, USG service level C and CGC service level B.

CUSTOM COLORS

- Suspension systems and panels are also available in colors not listed in Standard, Advantage and Premium offerings.
- Custom colors are subject to approval.
- A 3"x5" color chip is needed for matching.
- Lead time for custom colors will be 15 days unless otherwise notified
- Minimum order quantities may apply.

POWDER-COATED FINISHES

- Lead time for powder-coated finishes, including Powder White (3767), will be quoted via Request-To-Quote (RTQ)
  - Custom powder-coated colors are available and subject to approval.
  - Minimum quantities may apply.

SUSPENSION SYSTEM SERVICE LEVELS

Level	Lead time from order acceptance
Quick Ship	1–2 days
A	5–7 days
B	15 days
C	30 days
Advantage and Premium Colors	Typically 5 weeks from order.

EXCEPTIONS USG ONLY

- USG Donn® Brand Fineline® DXF™/DXLF™ Acoustical Suspension System available in Flat White with Black Reveal for no additional charge. Service level B.
- Brass and Chrome available in USG Donn® Brand DX®/ USG Donn® Brand DXL™ Acoustical Suspension System only. All Brass and Chrome items are service level C.
- USG Donn® Brand Fineline® DXFEV™ Acoustical Suspension System (environmental) available in Flat White with Black Reveal standard, service level C. Standard, Advantage, and Premium colors available, service level C.
- USG Logix™ Integrated Systems are available in Flat White, Service level C.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1859/rev. 9-25
© 2025 USG Corporation and/or its affiliates. All rights reserved.
Printed in USA

The trademarks USG, CGC, AX, CLIMAPLUS, DONN, DX, DXD, DXF, DXFEV, DXFF, DXI, DXL, DXLA, DXLF, DXLT, DXT, ECLIPSE, FINELINE, FROST, GLACIER, ILLUSION, LOGIX, MARS, PREMIER HI-LITE, RADAR, RENDITIONS, SANDRIFT, ZXLA, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG DRYWALL SUSPENSION SYSTEM

FLAT CEILINGS

USG: ORDER SAMPLES/LITERATURE
usg.comorsamplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800USG.4YOU(874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


30 YEAR LIMITED SYSTEM WARRANTY
- No Visible Sag
- Mold/Mildew Protection

SYSTEM COMPONENTS


StraightMainTees




Wall-to-Wall System Straight Tee**




Cross Tees








Moldings















Accessories

		ASTM Class	Length	Height	Item No.	Fire Rating	IBC Seismic Design	Rated Load [1] Hanger Spacing–lb./LF					
								24″		36″		48″	
								L/240	L/360	L/240	L/360	L/240	L/360
DGLW		Heavy Duty	12′	1.617″	DGLW26[1] DGLW26E(G90)[1]		A-F	129	86	57	38	24	16
DGW		Heavy Duty	6′ to 14′	1.617″	DGW26s	Class A	A-F	131	86	62	41	30	20

							Span L/360 lb./LF	
							Span	Value
DGLW		—	2′	1-1/2″	DGLW224 DGLW224E (G90)		A-F	24″	99.9
		—	26″	1-1/2″	DGLW2624[1]		A-F	26	93.1
		—	4′	1-1/2″	DGLW424		A-F	″	15.9
		—	50″	1-	DGLW50[1]			48	14.1
		—	72″	1/2″	DGLW624			″	4.7
DGW		—	5′ 6′ 7′ 8′	1.617″ 1/2″	DGW-6026DM DGW-7226DM DGW-8426DM DGW-9626DM	Class A	A-F	50 ″ 72 ″	
		—	12′	—	DGWM24 DGWM24E	—	A-F	60 ″ 72 84	—
		—	12′	—	DGCM27E	—	A-F	″ 96	—
		—	12′	—	DGLC-12	—	A-F	—	—

DGSC180 Splice Clip*	DGTC90 Transition Clip	DGC4, DGC6, DGC8 USG Compässo™ Drywall Clip	DGWC Wall Attachment Clip	GMAC-1 Close Mount Attachment Clip
				

* See AC3152 for alternative splice details ** See AC3230 for expanded wall-to-wall data

Firecode®

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
Drywall suspensionsystems guide: AC3152
Data sheet: AC3117
Data sheet wall-to-wall: AC3230
Samples: 257202
Direct mount install guide: AC5420

Material
Min. G40 hot-dipped galvanized steel. G90 hot-dipped galvanized steel available for select items.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Installation
Install according to ASTM C636, ASTM E580, ASTM C754 CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction. **Limitations**

Forexterior applications, the suspension system should be reviewed by a structural engineer. Please refer to SC2561 for more information about exterior ceiling applications.

LA Research Report - RR 25764
Refertousg.comformostcurrent version.

ICC Evaluation Services, LLC. Report Compliance
Forareas under ICC jurisdiction, seeICC-ES Evaluation Report ESR-4358 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

Notes
1. Manufactured and tested in accordance with ASTM C635, ASTM A653, and ASTM C645.
2. Spanning tees for Direct Mount System mfg. with cross tee connection clip at one end and flush-end at other.
3. Products with 'E' in name are made of G90 HDG steel.

Revit is the trademark of Autodesk Inc.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for errors that may inadvertently appear in this document.

AC3117/rev. 6-22

© 2022 USG Corporation and/or its affiliates. All rights reserved.
Printed in U.S.A.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, COMPÄSSO, FIRECODE, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.





















Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG CGC

Grids and Edges

09120/USG
BuyLine 4532

USG offers numerous suspension system and edge detail options to help meet your design intentions.Select a suspension system and match it with a corresponding panel edge detail,or vice versa,to assure proper system fit and assembly.

Suspension Systems / Edge Detail	DX® /DXL™	CENTRICITEE™ (DXT)	FINELINE® (DXF)	FINELINE 1/8 (DXFF)	DXW™	CE	DXLA™/ AX™/ ZXLA™/ DXSS	DXL Concealed
Square Edge (SQ)								
Shadowline Tapered (SLT)								
Shadowline (SL)								
Shadowline Bevel (SLB)								
Fineline (FL)								
Fineline Bevel (FLB)								
Pedestals (PE/ILT)								
Pedestals (PE/SLT)								
Interline Tapered (ILT)								
BESK								
SESK								

Notes
1.DONN®BrandAX™,DXLA™,and ZXLA™suspension systems have the same profile as DONNBrand DX/DXL and can utilize the same edge details.

2.DONNBrandDX/DXL,DXLA,ZXLA,DXLF,and DXLT fire-rated suspension systems and FIRECODE™Formulation panels may have restrictions on size and application; refer to appropriate UL Design for acceptable components.

3.The ILT edge is applicable only to Illusion and Pedestals face cut products. 4.Square edge panels are not recommended with 2 x4 modules using 9/16 grid.Refer to product pages for compatible grid options.

Building on a Century of Leadership and Innovation

USG offers the most comprehensive line of products and systems for walls,ceilings and floors.For more than 100 years,the USG name has represented the very best in the building materials industry.With strong brands such as SHEETROCK®Brand Gypsum Panels and DONN®Brand Suspension Systems,USG's reputation of quality and innovation is known worldwide.

USG's total building solutions approach integrates the following critical performance factors:fire resistance,sound control,moisture control,abuse resistance,and aesthetics.To help you design,specify,and install USG systems, please refer to the following resources:

		Products	Resources
Product Offering	**Walls**	**SHEETROCK Brand Gypsum Panels** Available in a number of specialized forms for various applications.	Gypsum Products (SA927)
		FIBEROCK® Brand Panels—Abuse-Resistant Deliver increased resistance to abrasion, indentation, and penetration in demanding construction applications.	Abuse-Resistant Systems (SA929)
		SHEETROCK Brand Interior Finishing Systems Complete line includes joint compounds, tapes, decorative textures, bead and trim, and drywall repair kits.	Interior Finishing Products (J1424)
		DUROCK® Brand Cement Board High strength backer board that delivers a water-durable base for walls, ceilings and countertops.	Cement Systems (SA932)
	Ceilings	**USG Ceilings™** Representing a wide variety of acoustical ceiling panels, suspension systems and specialty ceiling systems.	Ceiling Systems (SC2000)
	Floors	**FIBEROCK Brand Underlayment—AQUA-TOUGH™** All-purpose substrate engineered to meet every residential underlayment need.	FIBEROCK Brand Underlayment-AQUA-TOUGH (F103)
		LEVELROCK®Brand Floor Underlayment Ideal for multi-family,commercial and institutional buildings and for radiant heat applications.	Floor Underlayment (SA305)

Additional Product Information

The Gypsum Construction Handbook
The industry's best resource for good construction practices,also available in a Spanish version.

USG Gypsum Systems Catalog (SA99)
Complete guide togypsum product construction, including fire-rated,sound-rated, and abuseresistant assemblies for commercial and residential applications.

USG Ceiling Systems Catalog (SC2392)
Comprehensive guide to acoustical ceiling panels,suspension systems, and specialty ceiling systems.

USG Specialty Ceiling Systems Catalog (IC430)
Reference to the industry's most innovative specialty and accent ceiling systems for ceiling applications.

Website
www.usgsweets.com
Technical Service
800 USG.4YOU
Samples/Literature
888 874.2450
Samples/Literature E-mail
samplitusg.com
Samples/Literature/Fax
888 874.2348
Customer Service
800 950.3839

Note
All products described here may not be available in all geographic markets.Consult your local sales office or representative for information.

Trademarks
The following are trademarks of USG Interiors,Inc.or a related company:AX,CENTRICITEE,DONN, DX,DXL,DXLA,DXW,FINELINE, USG,ZXLA.


Notice
Weshall not be liable for incidental or consequential damages,directly or indirectly sustained,nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use.Our liability is expressly limited to replacement of defec- tivegoods.Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Safety First!
Follow good safety and indus- trial hygiene practices during handling and installing of all products and systems.Take necessary precautions and wear the appropriate personal protective equipment as need- ed.Read material safety data sheets and related literature on products before specification and/or installation.

Manufactured by
United States Gypsum Company
125 South Franklin Street
Chicago,IL 60606

SA904S/7-03
© 2003,USGInteriors,Inc.
Printed in U.S.A.


GERMAN ACOUSTIC CEILINGS - OWA

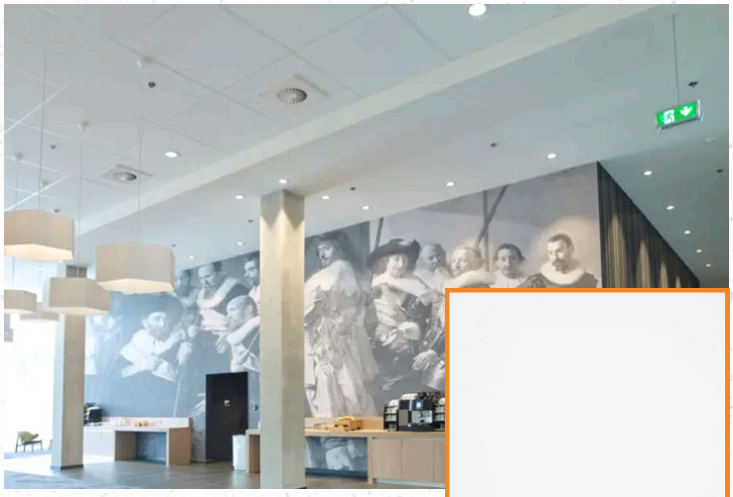

Octave 75



Octave 85

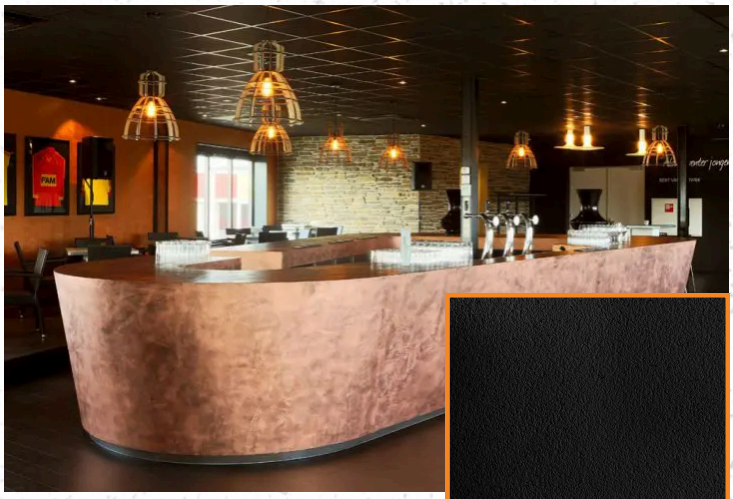

Octave 85



Octave 85 - Humancare



Octave 90 - High CAC




Octave 95



Sanitas 02




Sandila /N

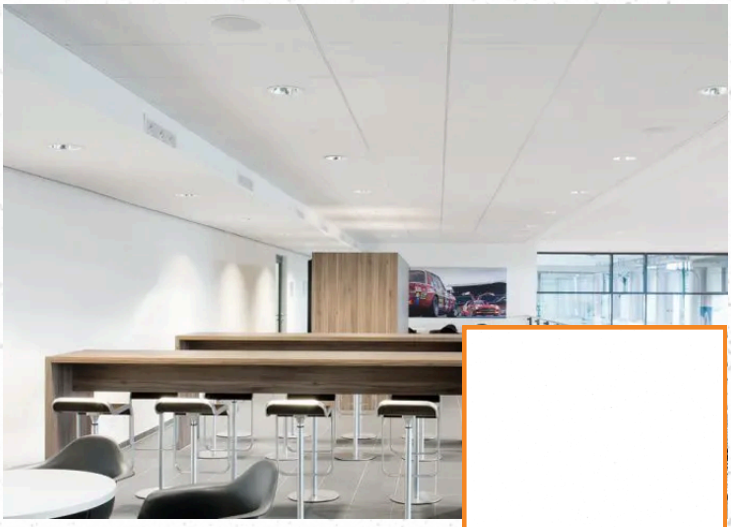

Sandila NRC


MINERAL FIBER

Material:



Available Edges:







Square Edge

Beveled Tegular for 15/16" T-Grid

Beveled Tegular for 9/16" T-Grid

Product	ITEM	Qty / Box	Thickness	Width	Length	Edge	NRC	CAC	Fire Performance	Cleanroom class	Humidity Resistance	Microbial Resistance	Recycled Content	Air Quality	Suspension System	MOQ	Color
80255 - Octave 75	80255	10	5/8"	24"	24"	BT	0.75	27	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 15/16"	40 boxes	
82736 - Octave 85	82736	12	5/8"	24"	24"	SQ	0.85	28	Class A	--	95%	Very High	Yes	Very High	T- Grid 15/16"	40 boxes	
82738 - Octave 85	82738	10	5/8"	24"	48"	SQ	0.85	28	Class A	--	95%	Very High	Yes	Very High	T- Grid 15/16"	40 boxes	
80292 - Octave 85 (Humancare)	80292	10	5/8"	24"	24"	BT	0.85	27	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 15/16"	40 boxes	
87871 - Octave 90 High CAC	87871	8	1"	24"	24"	BT	0.90	34	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 9/16"	40 boxes	
85661 - Octave 95	85661	10	3/4"	24"	24"	BT	0.95	--	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 9/16"	40 boxes	
85659 - Octave 95	85658	10	3/4"	24"	24"	BT	0.95	--	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 15/16"	40 boxes	
75692 - Sanitas 02	75692	12	5/8"	24"	24"	SQ	0.10	42	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 15/16"	40 boxes	
75693 - Sanitas 02	75693	10	5/8"	24"	48"	SQ	0.10	42	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 15/16"	20 boxes	
82719 - Sandila /N	82719	10	5/8"	24"	48"	SQ	0.60	37	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 15/16"	20 boxes	
82729 - Sandila NRC	82729	10	5/8"	24"	24"	BT	0.70	35	Class A	ISO 4	95%	Very High	Yes	Very High	T- Grid 15/16"	40 boxes	

Seals and Certifications:

BENNER SUSPENSION SYSTEM

SYSTEM



CROSS TEES




MAIN TEES

BENNER PRODUCTS


T-GRID


T-GRID

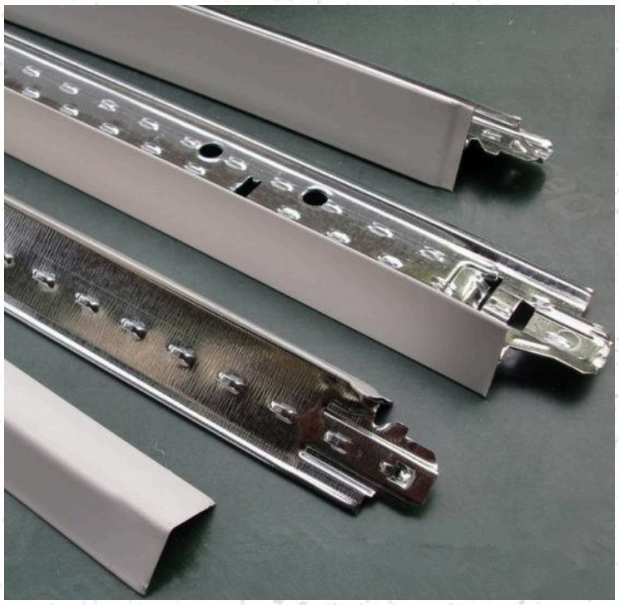

Ceiling Options:


Continuous Ceiling

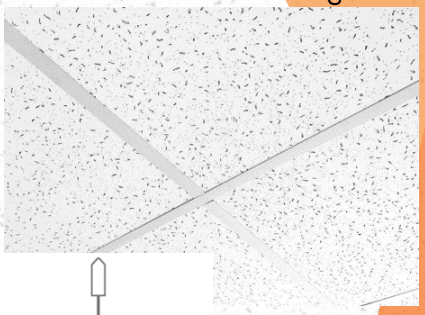




Square Edge

Beveled Ceiling

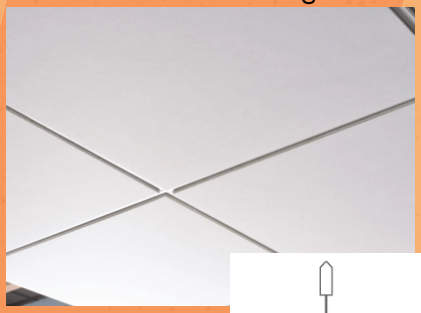



Beveled Tegular Edge

Components

Main Tees



Cross Tees




Wall Molding




Exposed Grid Size






#116 - 38H T-grid




#116 - 38H T-grid

Profile	ITEM	Qty / Box	Height	Width	Length	Heavy Duty category (ASTM C635)	Compression / Tension	Baked Polyester paint finish	Expose Tee system	Recycled Content	Color
Main Tee	5110	25	1½"	15/16"	144"	Yes	365 / 7	Yes	Yes	70%	
Cross Tee	5210	75	1½"	15/16"	24"	Yes	365 / 7	Yes	Yes	70%	
Cross Tee	5213	75	1½"	15/16"	48"	Yes	365 / 7	Yes	Yes	70%	
Wall Molding	5410	40	15/16"	15/16"	142"	Yes	N/A	Yes	Yes	70%	
Main Tee	5112	25	1½"	15/16"	144"	Yes	299 / 5	Yes	Yes	70%	
Cross Tee	5212	75	1½"	15/16"	24"	Yes	299 / 5	Yes	Yes	70%	
Cross Tee	5215	75	1½"	15/16"	48"	Yes	299 / 5	Yes	Yes	70%	
Wall Molding	5412	40	7/8"	7/8"	142"	Yes	N/A	Yes	Yes	70%	
Main Tee	5113	25	1½"	9/16"	144"	Yes	299 / 5	Yes	Yes	70%	
Cross Tee	5216	75	1½"	9/16"	24"	Yes	299 / 5	Yes	Yes	70%	
Cross Tee	5219	75	1½"	9/16"	48"	Yes	299 / 5	Yes	Yes	70%	
Wall Molding	5413	40	15/16"	9/16"	142"	Yes	N/A	Yes	Yes	70%	

How does it work?

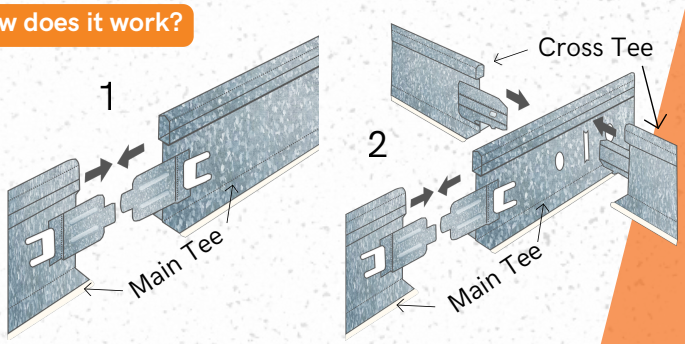

Join the main tees by overlapping the safety clips.

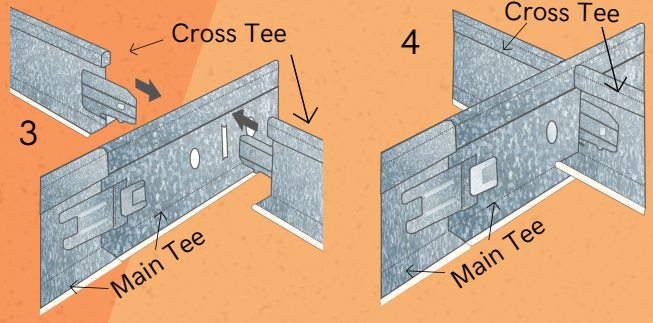

Insert the cross tees through the fixing slots, overlapping the safety clips.

BENNER ACOUSTIC PANEL





BENNER PRODUCTS

BENNER ACOUSTIC PANEL

www.bennerproducts.com

Benner Acoustic Panels




Acoustic panels - (also known as sound absorption panels, soundproof panels or sound panels) are sound-absorbing fabric-wrapped boards designed to control echo and reverberation in a room.


Benner Acoustic Panels are highly aesthetic and popularly customized. Our panels offer an elegant and economical sound absorption solution.


Benner Acoustic Panels offer a variety of sizes and shapes available in over 50 colors. Our panels provide ideal results for noise control and are impressively decorative which allows them to accommodate to any workable environment. Our Glass Fiber panels are covered with an acoustically transparent and very decorative fabric, the fabrics allow for the variety in colors as well as variety in the texture of the fabric. The fabrics that are used are offered in an assortment of different textures. **Benner Acoustic Panels** are ideal for spaces with high reverberation time. Our panels are designed to improve sound quality and to provide a decorative look within a room.



Manufacturing

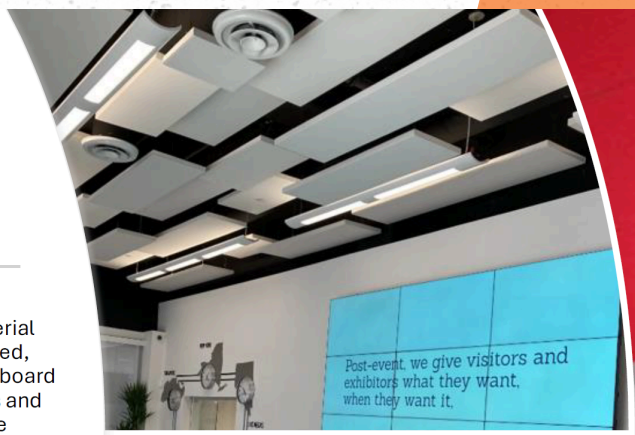

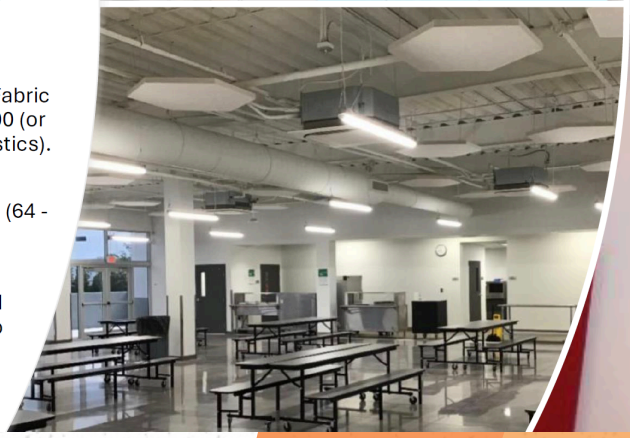

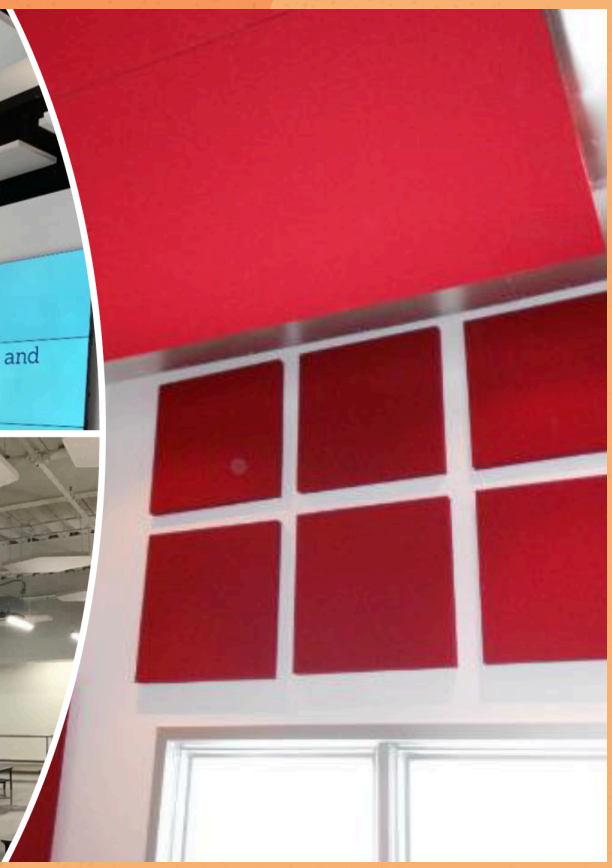

- Manufactures Standard panel construction consisting of facing material stretched over front face of edge-framed, dimensionally stable, rigid glass-fiber board core and borders or attached to edges and back of frames and complying with the
- following requirements:

  - Facing Material: Stretched Panel Fabric Guilford of Maine FR 701 Style 2100 (or other fabrics of similar characteristics).
  - Nominal core Density: 4-7 lbs /Ft3 (64 - 112 Kg/m3).
  - Framing: Manufacturer´s standard metal or wood framing system. No plastic frame.


BENNER ACOUSTIC PANEL


www.bennerproducts.com

Acoustical Performance

Acoustic Performance 1" Thick Noise Reduction Coefficient 0.86	
Absorption Coeff. (α)	Frequency (Hz)
0.16	125
0.27	250
0.85	500
1.13	1000
1.2	2000
1.21	4000
0.86	**NRC**

Acoustic Performance 2" Thick Noise Reduction Coefficient 0.86	
Absorption Coeff. (α)	Frequency (Hz)
0.24	125
0.82	250
1.26	500
1.32	1000
1.23	2000
1.17	4000
1.16	**NRC**

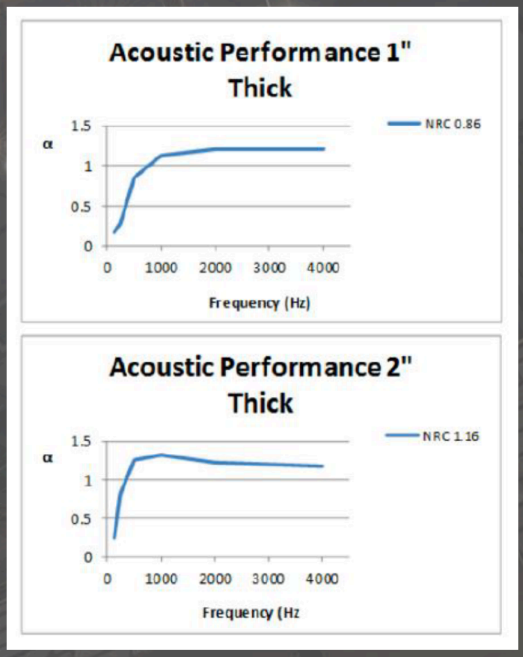

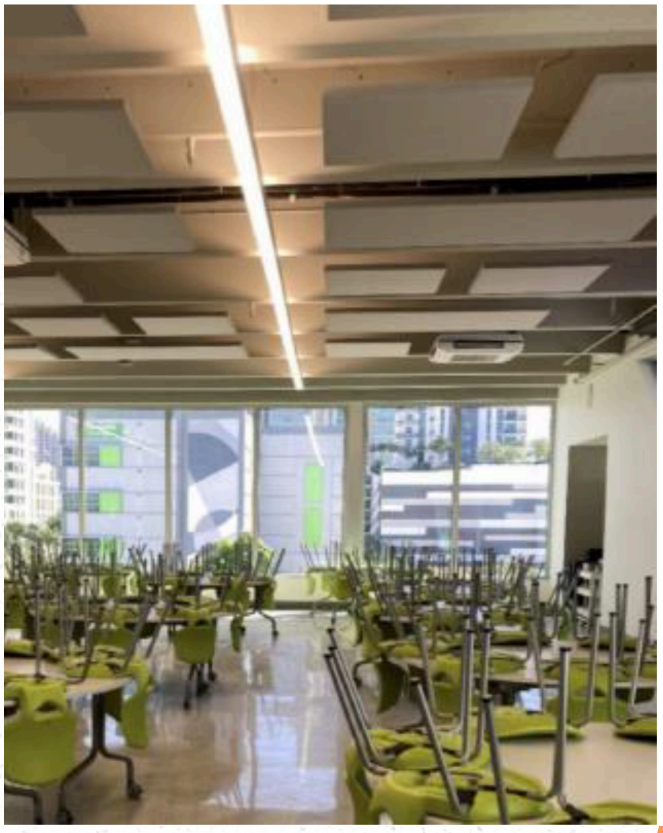

Cleaning and Maintenance

These panels are designed for long term use in building environments with minimal maintenance. These panels, however, can be vacuum cleaned as per customer desire; additionally, any marks may be cleaned with a damp cloth/wipe.

Fire Resistance

All our panels are classified as Class A or Class 1 laboratory tested as per ASTM- E84.). Smoke developed: 50.

Technical Properties

- Panel Thickness: Manufacturer´s Standard
- 2" inches Rigid Fiber-Glass
- 1" inches Rigid Fiber-GlassPanel
- Widths: 24", 48”, or custom
- Panel Height: 2’, 4’, 6´, 8´, 9´, & 10´
- Edge detail: Square or custom

BENNER ACOUSTIC PANEL


www.bennerproducts.com

Impaling Clips Option


If the wall panels are not required to be removable, the easiest method of installation is impaling clips. Impaling clips are shipped from the factory with the panels.


1. Should be screwed into the wall where the panels are to be installed. Care should be taken to screw the impaling clips into a stud when possible and to space the clips so that they will be evenly spaced on the back of the panel.
2. The back of the wall panel should be covered with a construction adhesive(Liquid Nail PL 200, Chemrex 200, etc) and placed onto the wall in the desired location.

Caution: Adhesive skins over rather quickly, in perhaps two minutes or less and loses a great deal of its penetrating ability. Therefore, it is important that the adhesive be applied quickly to the panels and then quickly applied to the mounting surface, one panel at a time.

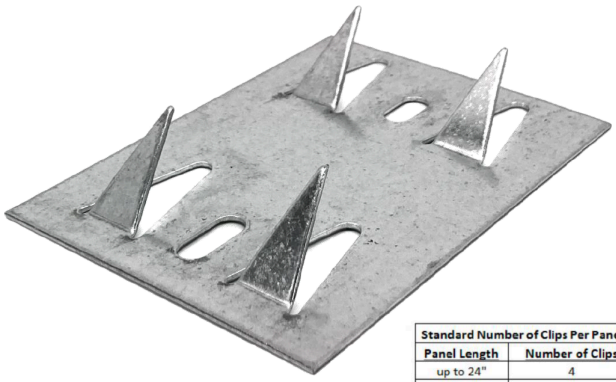



Standard Number of Clips Per Panel	
Panel Length	Number of Clips
up to 24"	4
24" x 48"	4
48" x 72"	6 - 8
48" x 96"	6 - 8
48" x 120"	8

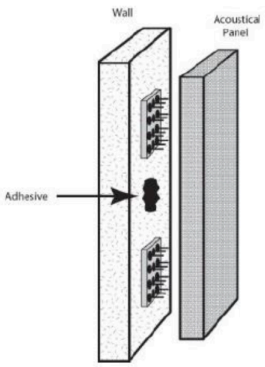


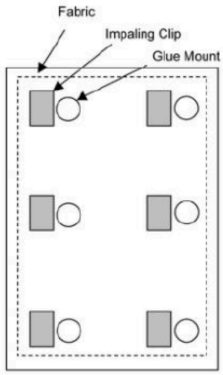


to be used on ceiling.

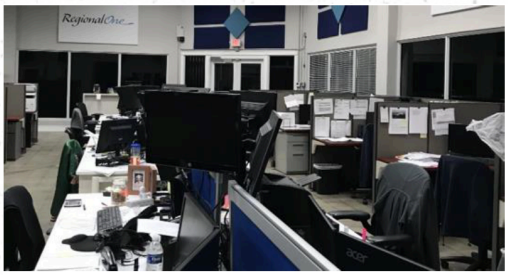

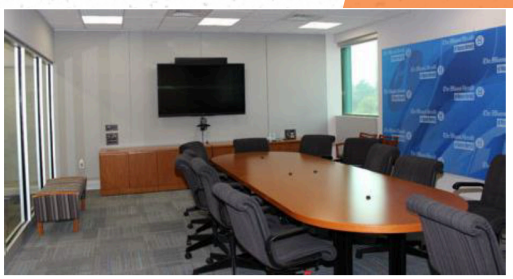

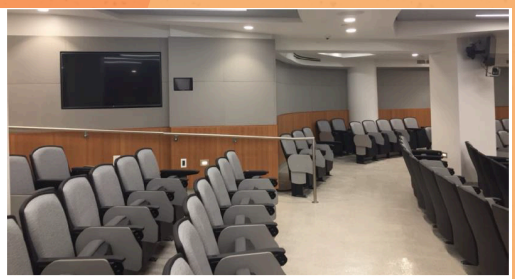

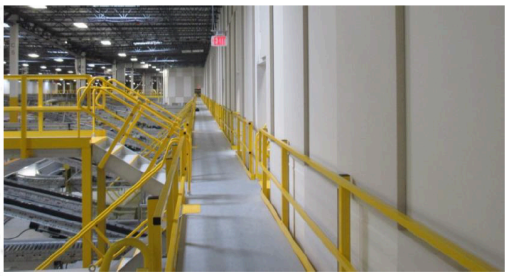








Gallery




BENNER ACOUSTIC PANEL




www.bennerproducts.com

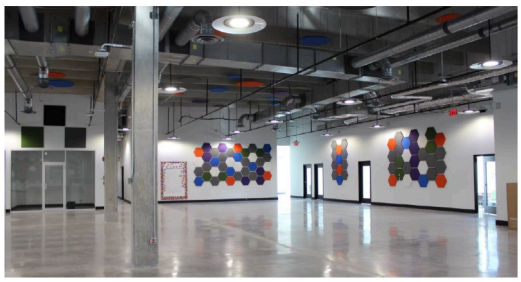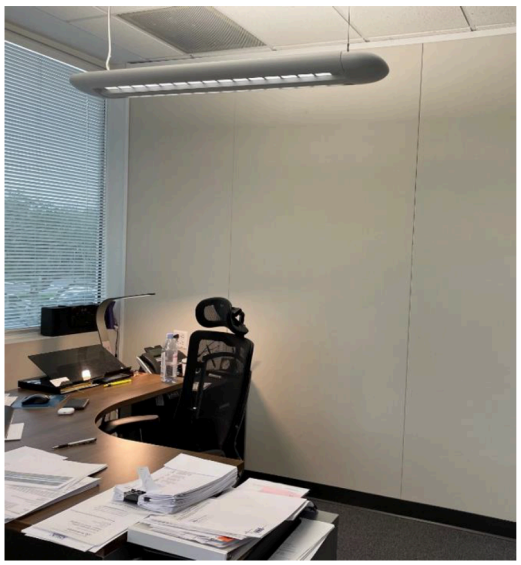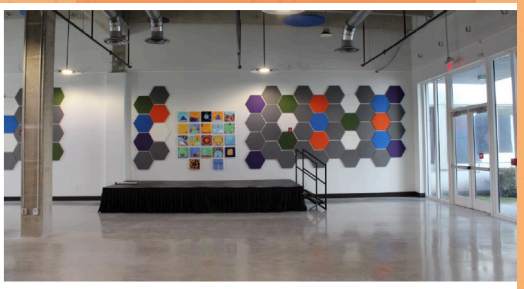


Gallery





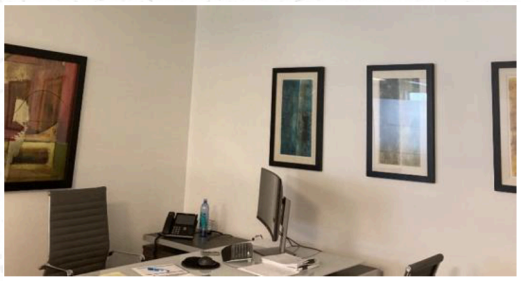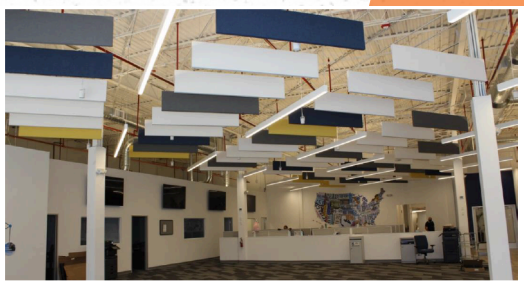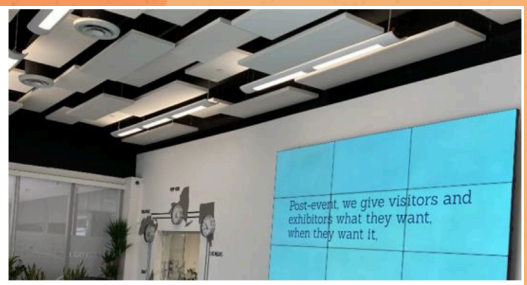

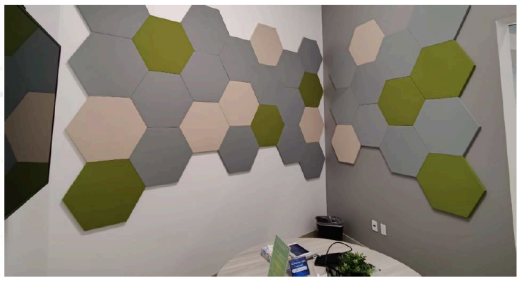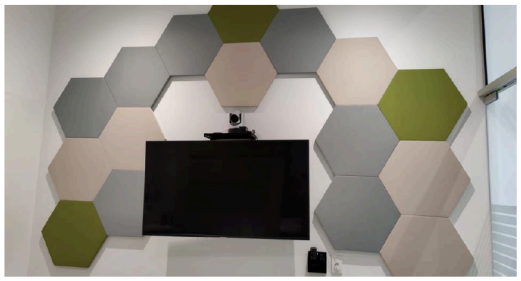
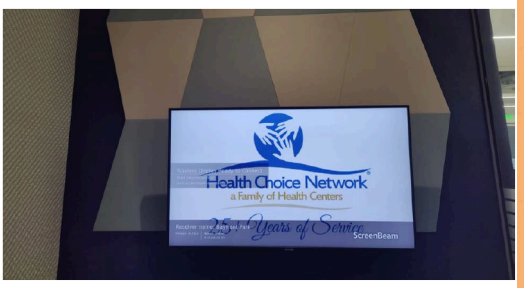




Gallery


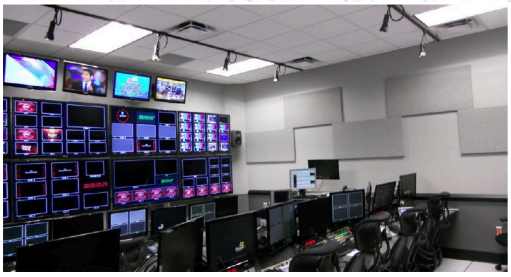
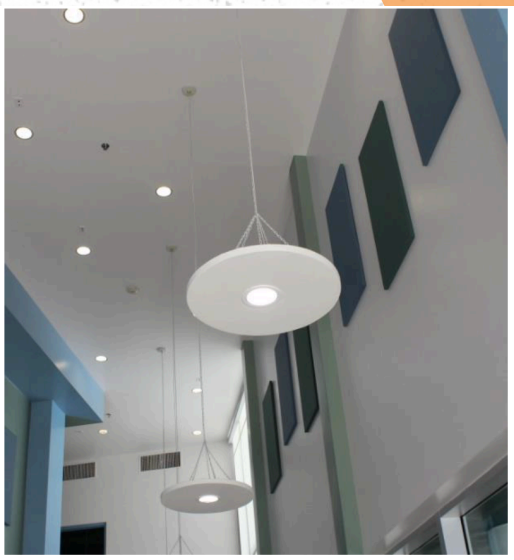
BENNER ACOUSTIC PANEL

www.bennerproducts.com

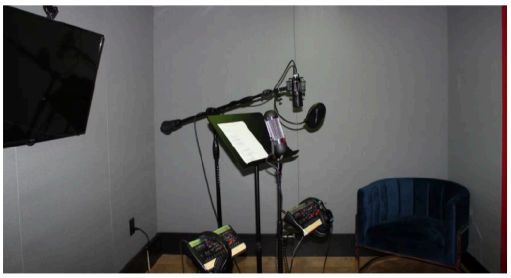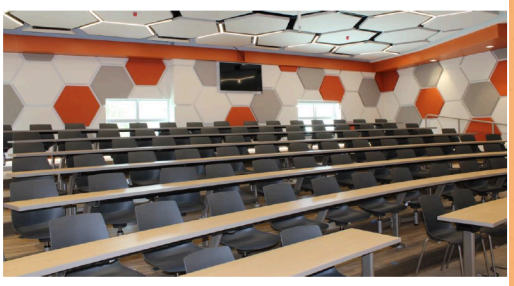
Gallery






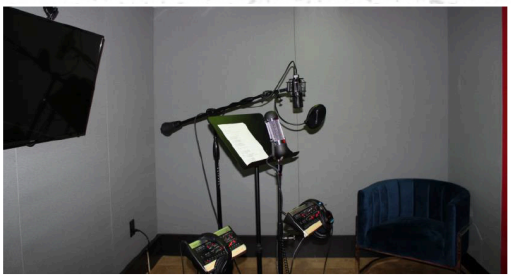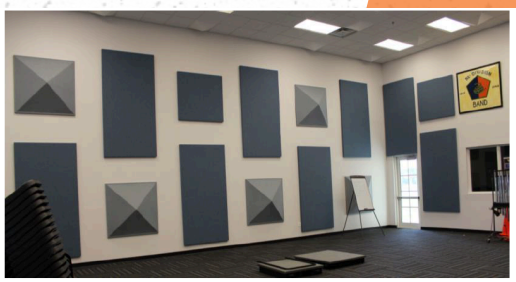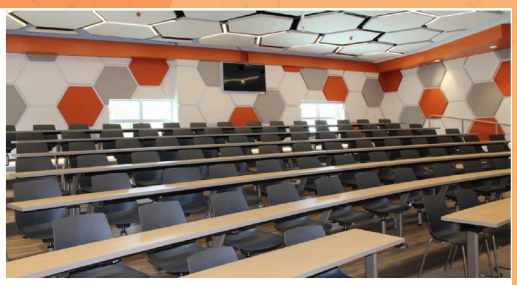




Gallery


BENNER ACOUSTIC PANEL

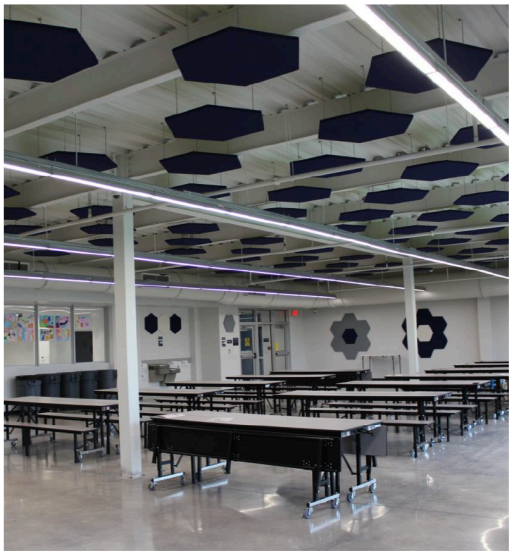www.bennerproducts.com



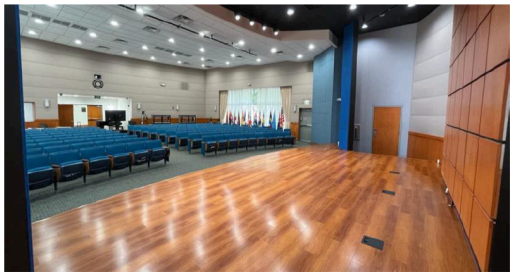

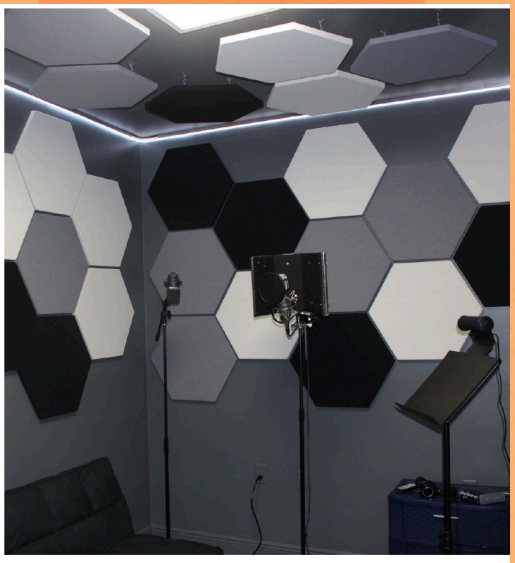

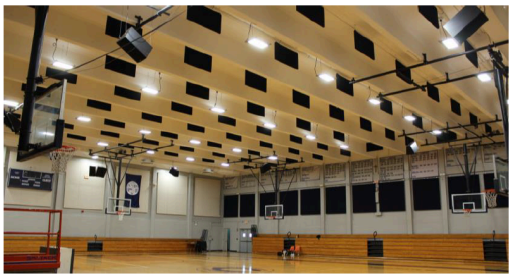



Gallery

BENNER PRODUCTS

REFLECTIVE INSULATION




SINGLE BUBBLE WRAP

DOUBLE BUBBLE WRAP


BENNER PRODUCTS

REFLECTIVE INSULATION

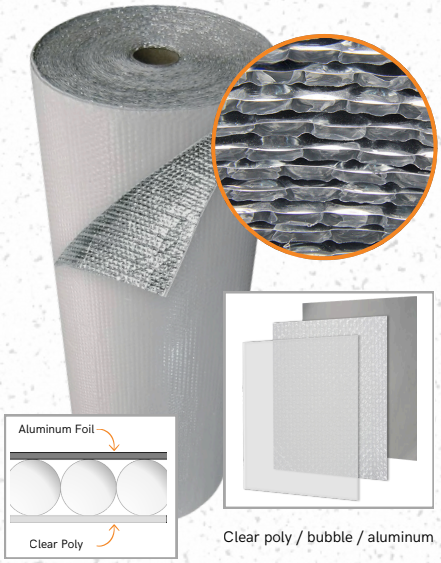

Clear poly / bubble / aluminum

ITEM - 13000

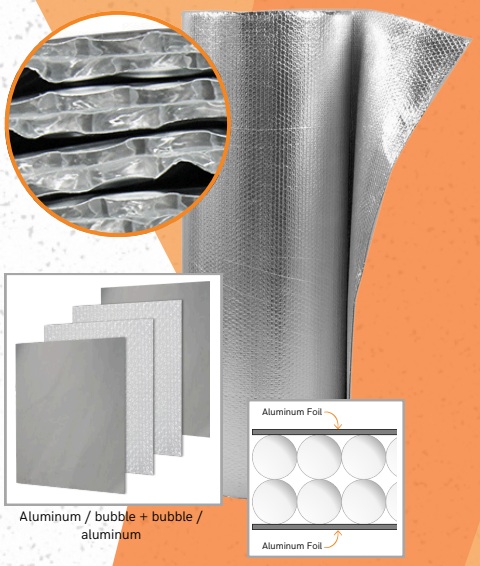

Aluminum / bubble + bubble / aluminum


ITEM - 13001


Code	Product Name	Height	Length	Total Area	Durable	Ignitability Rating	Color	Reflectivity	Min. Temp. Range	Max. Temp. Range	Packaging	MOQ
13000	Single Bubble	1.2 m (4 ft)	35 m (125 feet)	42 sqm (500 sft)	Highly	Excellent	White / silver	97% - 99.9%	-50°C (-58°F)	80°C (176°F)	1 roll	25 rolls
13001	Double Bubble	1.2 m (4 ft)	30 m (100 feet)	36 sqm (400 sft)	Highly	Excellent	Silver	97% - 99.9%	-50°C (-58°F)	80°C (176°F)	1 roll	25 rolls

Code Section	Applicable Code/Section	Test Method	Requirement
Surface Temperature (Section 604.2)	International Mechanical Code	ASTM	Ducts that operate at temperatures exceeding 120°F (49°C) shall have sufficient thermal insulation to limit the exposed surface temperature to 120°F (49°C).
Coverings and Linings (Section 604.3)	International Mechanical Code	ASTM E 84	Maximum Flame Spread and Smoke Developed Ratings of 25/50. Duct coverings and linings shall not flame, glow, smolder or smoke when to a temperature of 250°F (121°C).
Surface Burning	International Mechanical Code	ASTM C411	Foam plastic shall conform to the requirements of Section 604 and the International Building Code. This criteria applies only to duct insulation materials that are foam plastic (bubble pack materials are not foam plastic).
Temperature Exposure (Section 604.7)	International Mechanical Code	UL181	Duct insulations must be labeled at intervals not greater than 36 inches (914 mm) with the name of the manufacturer, R-value, flame spread and smoke developed ratings.
Identification (Section 604.13)	International Mechanical Code	UL181	Insulations used as internal insulation (duct liner) and exposed to the airstream in ducts shall be shown to be durable when tested in accordance with UL181.


Product Name	Single Bubble	Double Bubble
Fiber	Free	Free
Clean & Safe	Yes	Yes
Irritation Insulation	No	No
Water Barrier	Yes	Yes
Hail Resistant	Yes	Yes
Anti-tear Surface	Yes	Yes
Anti-fungal	Yes	Yes
Anti-bacterial	Yes	Yes
Resist rodent & insect nesting	Yes	Yes
Material	Aluminum and polyethylene bubble	Aluminum and polyethylene bubble
Structure	White poly / bubble / aluminum	aluminum / bubble + bubble / aluminum

Applications: Industrial, commercial or residential constructions

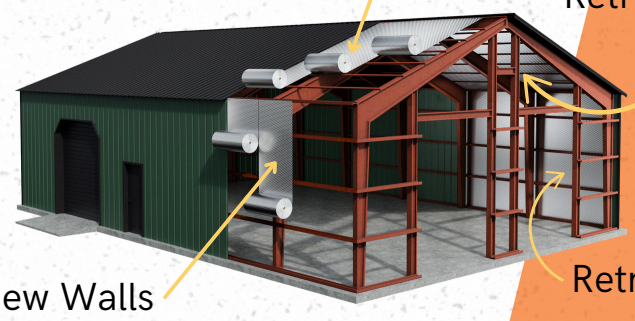





Metal/Wood Roof & Ceilings



Metal/Wood Walls



Radiant Floors




AC / Heat Ducts

www.bennerproducts.com

REFLECTIVE INSULATION



ITEM - 13003

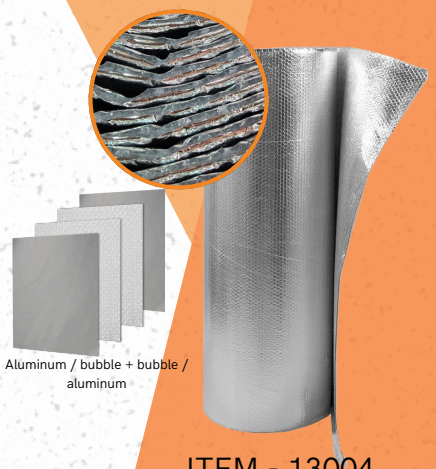

ITEM - 13004


ITEM - 13002


Code	Product Name	Height	Length	Total Area	Durable	Ignitability Rating	Color	Reflectivity	Min. Temp. Range	Max. Temp. Range	Packaging	MOQ
13002	Single Bubble	1.2 m (4 ft)	35 m (125 ft)	45 sqm (500 sft)	Highly	Class A / Class 1	White / Silver	Up to 97%	-60°F (-51°C)	180°F (82°C)	1 roll	25 rolls
13003	Single Bubble	1.8 m (6 ft)	35 m (125 ft)	45 sqm (750 sft)	Highly	Class A / Class 1	White / Silver	Up to 97%	-60°F (-51°C)	180°F (82°C)	1 roll	26 rolls
13004	Double Bubble	1.2 m (4 ft)	30 m (100 ft)	36 sqm (400 sft)	Highly	Class A / Class 1	Silver	Up to 97%	-60°F (-51°C)	180°F (82°C)	1 roll	27 rolls

Code Section	Applicable Code/Section	Test Method	Requirement
Contact Temperature Range	Product Specification	—	-60°F to 180°F (-51°C to 82°C)
Water Vapor Transmission	Water Vapor	ASTM E96	.02 perms
Puncture Resistance	Physical Property	—	60 lbs/in
Pliability	Physical Property	—	No Cracking
Linear Shrinkage	Physical Property	—	None
Mold and Mildew	Surface / Durability	—	No Growth
Flame Spread	Surface Burning	ASTM E84-08	0
Smoke Development	Surface Burning	ASTM E84-08	Single Bubble WF: 20 Double Bubble DF: 40
Fire Rating	Surface Burning	ASTM E84-08	Class A / Class 1


Product Name	Single Bubble	Double Bubble
Fiber	No	No
Clean & Safe	ASTM tested	ASTM tested
Irritation Insulation	No	No
Water Barrier	Yes	Yes
Hail Resistant	Not specified	Not specified
Anti-tear Surface	Not specified	Not specified
Anti-fungal	Yes	Yes
Anti-bacterial	Not specified	Not specified
Resist rodent & insect nesting	Not specified	Not specified
Material	White polyethylene + barrier bubble + reflective metalized film	Reflective metalized film + barrier bubble + barrier bubble + reflective metalized film
Structure	One layer of 1/8" barrier bubble film laminated between one layer of reflective metalized film and one layer of white polyethylene.	Two layers of 1/8" barrier bubble film laminated between two layers of reflective metalized film.

Applications: Industrial, commercial or residential constructions

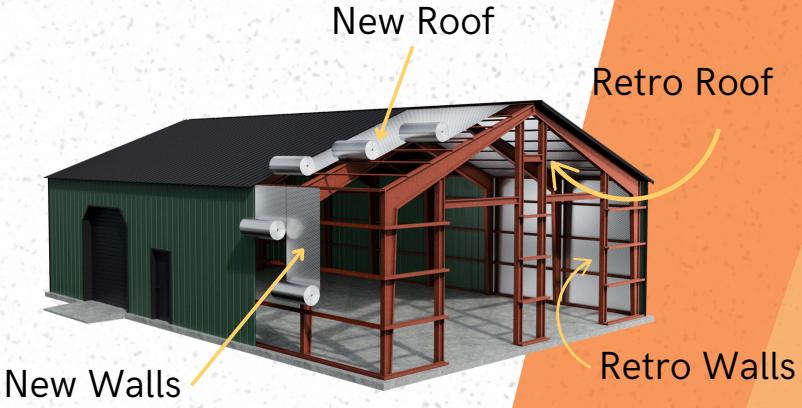





Metal/Wood Roof & Ceilings




Metal/Wood Walls



Radiant Floors



AC / Heat Ducts

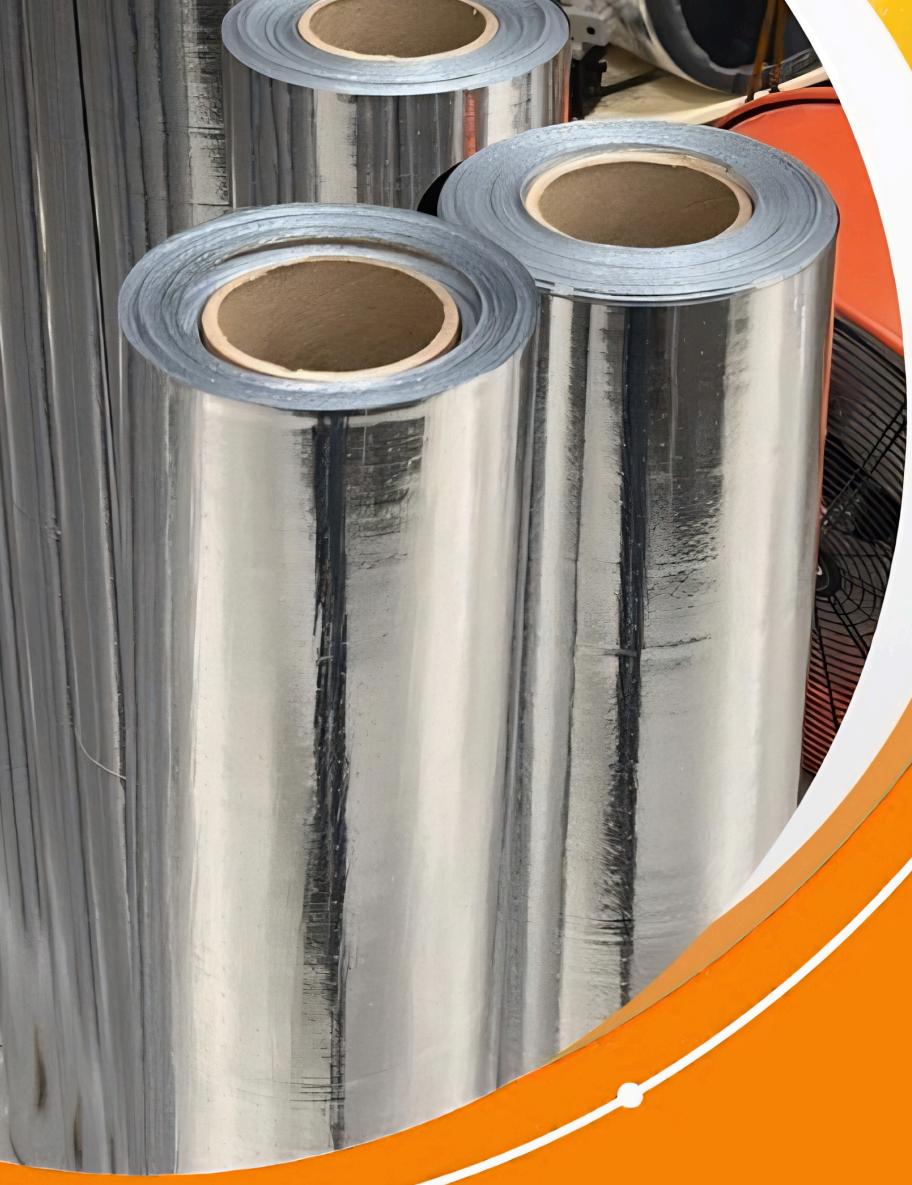

BENNER
REFLECTIVE INSULATION

WHY BENNER?

When it comes to high-performance insulation and building solutions, Benner Products is committed to providing high-quality insulation products proudly made in the USA. We distribute reliable, high-performance insulation solutions designed to meet the needs of contractors, builders, and commercial projects.

UNMATCHED DISTRIBUTION POWER

Premium U.S.-Made Radiant Barriers and Air Bubble Insulation

WHY CUSTOMERS CHOOSE US:

Reliable Supply

High-performance insulation products

U.S. - MADE QUALITY

Premium radiant barriers & air bubble insulation

Engineered for Superior Performance

Proudly Made in the USA

Custom Solutions for Every Need


Trusted Quality & Reliable Supply

BENNER PRODUCTS


When it comes to high-performance insulation and building supply materials, Benner Products stands apart as a trusted distributor of quality insulation solutions made in the USA. Here's why leading contractors, builders, and industrial clients choose Benner Products:

Product	Reflective Barrier – Foil / Foil	Reflective Barrier – Foil / White
Description	Double-sided reflective metallized film with polyethylene woven reinforcement.	Single-sided reflective metallized film. Other side white PE, with polyethylene woven reinforcement and UV
Standard Roll Sizes	4' × 100'	4' × 125' / 6' × 125'
Weight per Roll	14 lbs. (500 sq ft) / 28 lbs. (1000 sq ft)	12.80 lbs. (500 sq ft) / 25.60 lbs. (1000 sq ft)
Thickness	125 microns	125 microns
Water Vapor Transmission	Unit: g/100 in^2/24 hrs% Value: 5.6 Test Method: ASTM E96 Proc A	Unit: g/100 in^2/24 hrs Value: 5.6 Test Method: ASTM E96 Proc A
Permeability	.040 Perms (S) / .040 Perms (P) ASTM E96-05	.046 Perms (S) / .046 Perms (P) ASTM E96-05
Puncture Strength	60 lbs./inch	60 lbs./inch
Tensile / Tear Strength	Length: 148.50 Pounds Force Width: 138.29 Pounds Force ASTM D2261	Length: 127.33 Pounds Force Width: 92.17 Pounds Force ASTM D2261
Shrinkage	None	None
Pliability	70°F ±5°F & 50±5% Relative Humidity No Cracking or Delamination ASTM C1224	70°F ±5°F & 50±5% Relative Humidity No Cracking or Delamination ASTM C1224
Adhesive Performance	180°F ±5°F & 50% Relative Humidity No Bleeding or Delamination ASTM C1313-	No Bleeding or Delamination ASTM C1313-05 Class A / Class 1
Flame Spread & Smoke	Class A / Class 1 0 Flame Spread, 5 Smoke Development ASTM Method E84-10	Class A / Class 1 0 Flame Spread 5 Smoke Development ASTM Method E84-10
Resistance to Fungi	Pass – No Growth ASTM C1338-08	Pass – No Growth ASTM C1338-08
Total Hemispherical Emittance	Emissivity: 0.05 Reflectivity: 95% ASTM C1371-04a	Emissivity: 0.05 Reflectivity: 95% ASTM C1371-04a
Thermal Resistance Values**	Heat Flow Down: R-7.57 Heat Flow Up: R-3.67 Heat Flow Horizontal: R-5.04	Heat Flow Down: R-7.95 Heat Flow Up: R-4.05 Heat Flow Horizontal: R-5.42

METAL FRAMING

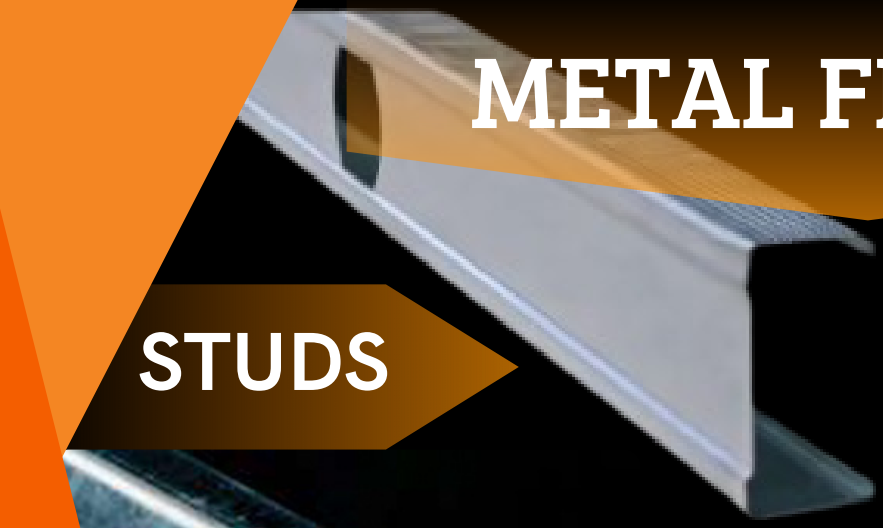

STUDS

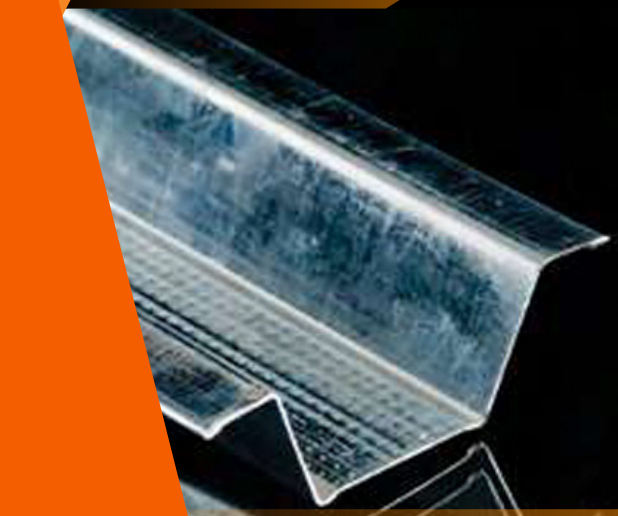


FURRING CHANNEL



COLD ROLLED CHANNEL



CORNER BEAD

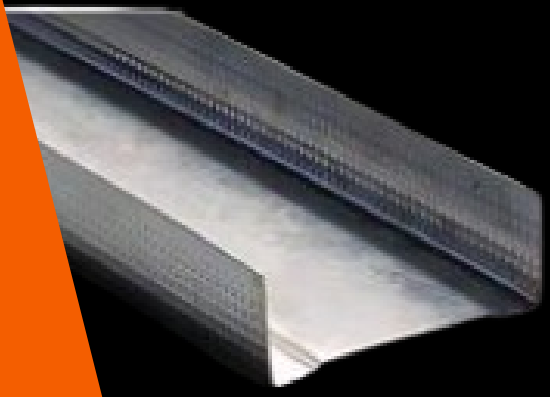


TRACK

Other Framing Products (Structural Profiles / Industrial Profiles / Roofing Sheets & Enclosures)

BENNER PRODUCTS


METAL FRAMING

STUDS

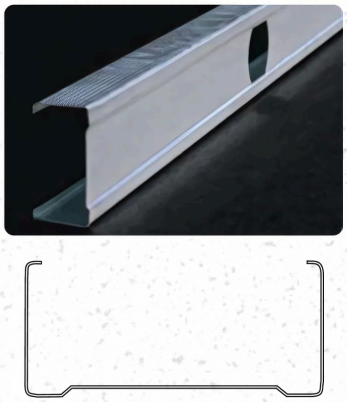


CODE	PRODUCT NAME	UNIT
MA014-14-001	METAL STUD G25 1-5/8" X 8'	Piece
MA014-14-002	METAL STUD G25 1-5/8" X 10'	Piece
MA014-14-003	METAL STUD G25 1-5/8" X 12'	Piece
MA014-14-004	METAL STUD G25 2-1/2" X 8'	Piece
MA014-14-005	METAL STUD G25 2-1/2" X 10'	Piece
MA014-14-006	METAL STUD G25 2-1/2" X 12'	Piece
MA014-14-007	METAL STUD G25 3-5/8" X 8'	Piece
MA014-14-008	METAL STUD G25 3-5/8" X 10'	Piece
MA014-14-009	METAL STUD G25 3-5/8" X 12'	Piece
MA014-14-010	METAL STUD G20 1-5/8" X 10'	Piece
MA014-14-011	METAL STUD G20 1-5/8" X 12'	Piece
MA014-14-012	METAL STUD G20 2-1/2" X 10'	Piece
MA014-14-013	METAL STUD G20 2-1/2" X 12'	Piece
MA014-14-014	METAL STUD G20 3-5/8" X 10'	Piece
MA014-14-015	METAL STUD G20 3-5/8" X 12'	Piece
MA014-14-016	METAL STUD G20 6" X 12'	Piece

TRACKS

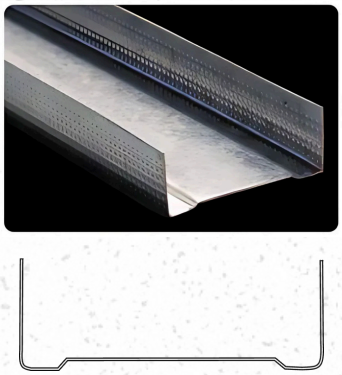

CODE	PRODUCT NAME	UNIT
MA014-14-017	METAL TRACK G25 1-5/8" X 10'	Piece
MA014-14-018	METAL TRACK G25 2-1/2" X 10'	Piece
MA014-14-019	METAL TRACK G25 3-5/8" X 10'	Piece
MA014-14-020	METAL TRACK G20 1-5/8" X 10'	Piece
MA014-14-021	METAL TRACK G20 2-1/2" X 10'	Piece
MA014-14-022	METAL TRACK G20 3-5/8 X 10'	Piece
MA014-14-023	METAL TRACK G20 6" X 12'	Piece

COLD ROLLED CHANNEL

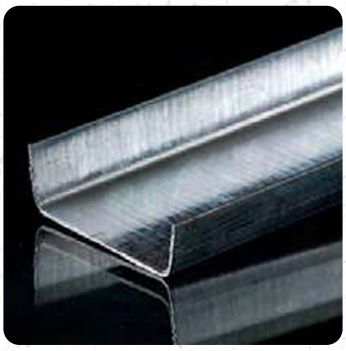

CODE	PRODUCT NAME	UNIT
MA014-14-024	Cold Rolled Channel G20 - 1/4" x 1-1/2" 1-1/2" / 10'	Piece
MA014-14-025	Cold Rolled Channel G16 - 1/4" x 1-1/2" 1-1/2" / 10'	Piece

METAL FRAMING

FURRING CHANNEL



CODE	PRODUCT NAME	UNIT
MA014-14-026	Furring Channel G25 - 2-1/4" x 1" x 1" / 10'	Piece
MA014-14-027	Furring Channel G20 - 2-1/4" x 1" x 1" / 10'	Piece

CORNER BEAD




CODE	PRODUCT NAME	UNIT
MA014-14-028	Corner Bead G25-1-1/4" x 1-1/4" x 10"	Piece

OTHER FRAMING PRODUCTS AVAILABLE UPON REQUEST

MOQ: Full or Mixed Container


1) Structural profiles.

In galvanized steel and black iron, made in compliance with ASTM C955 and ASTM A653 standards.

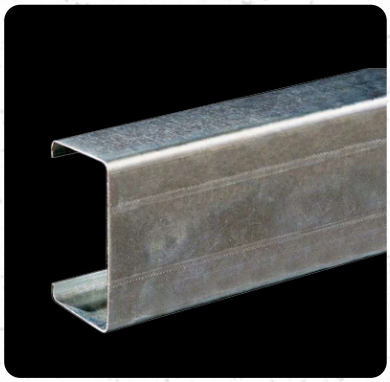


Structural Profile C

Designed for the assembly of trusses, mezzanines, columns, beams and also ideal for the assembly of Lightweight enclosures with special structural requirements.

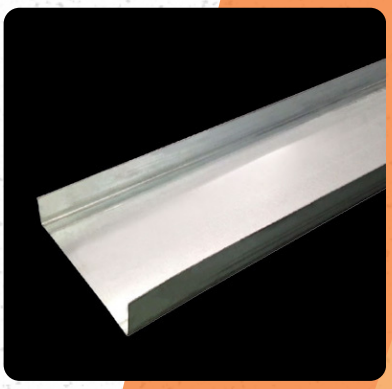

Structural Track

Specially designed for the assembly of lightweight enclosures with special structural requirements.

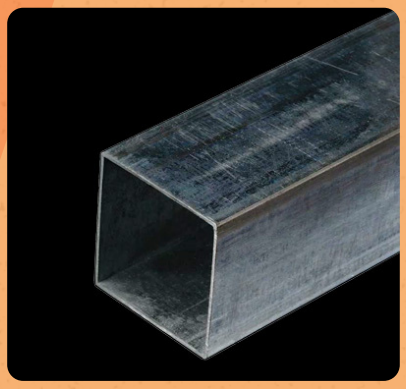

Square and Rectangular Tube

Structural profiles for construction.


METAL FRAMING

OTHER FRAMING PRODUCTS AVAILABLE UPON REQUEST

2) Industrial Profiles.


MOQ: Full or Mixed Container

In galvanized steel and black iron, made in compliance with ASTM C955 and ASTM A653 standards.

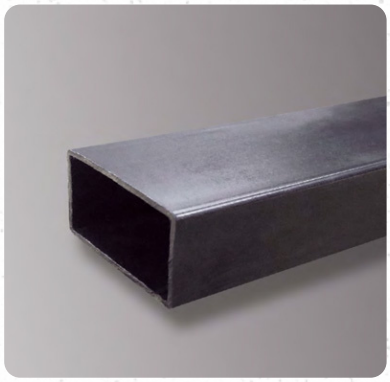

Industrial Pipe

Profiles used in the metalworking industry and construction

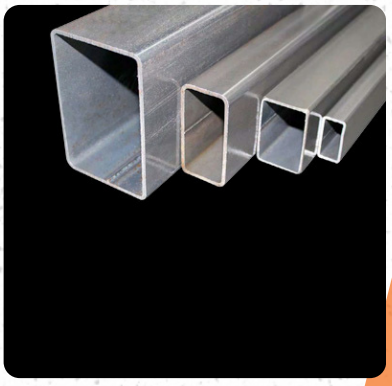

Rectangular Tube

Structural profiles for construction.




Round Tube

Structural profiles for construction.

3) Roofing Sheets and Enclosures


MOQ - Full or Mix Container

Made with high resistance steel in accordance with international standards and with galvanized coating to prevent corrosion.

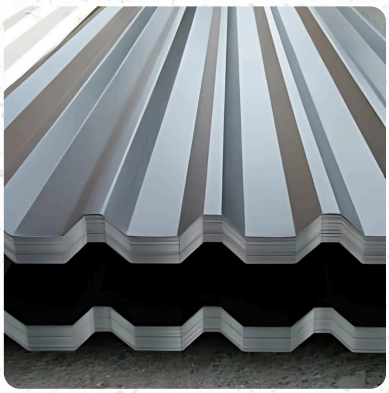

Rectangular Sheet


For roofs of homes, commerce, industry, temporary enclosures, among other architectural applications.

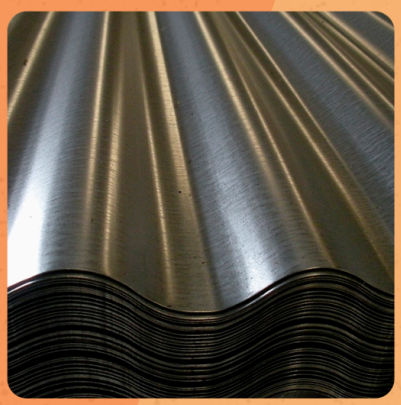

Corrugated Sheet

For roofs of homes, commerce, industry, temporary enclosures, among other architectural applications.

BENNER
PVC MOLDING

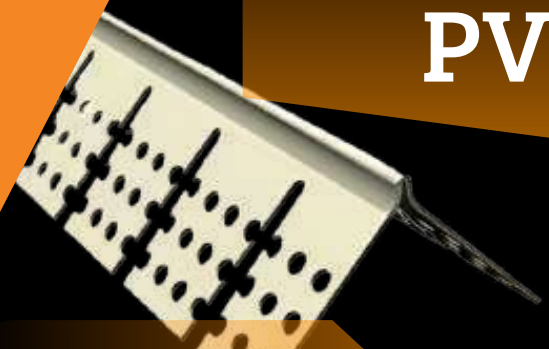


CORNER
BEAD




DRYWALL
VINYL



J-BEADS

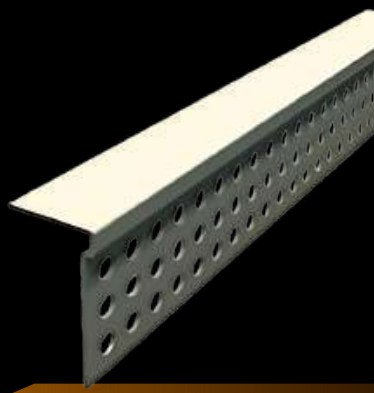

L-BEADS

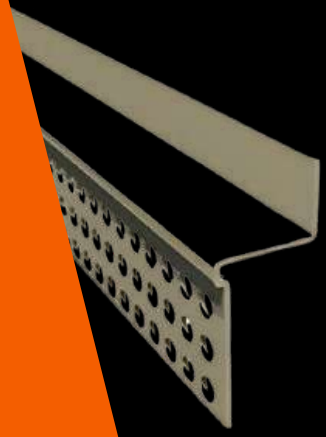


Z-BEADS

BENNER
PRODUCTS


Casing Beads
Expansion Joint
Flash Cove PVC
Mesh Corner Bead

CORNER BEADS


www.bennerproducts.com

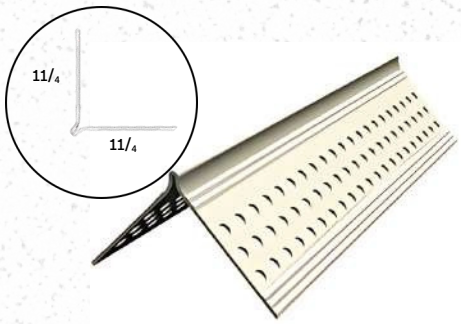

Items: 3401 - 3402

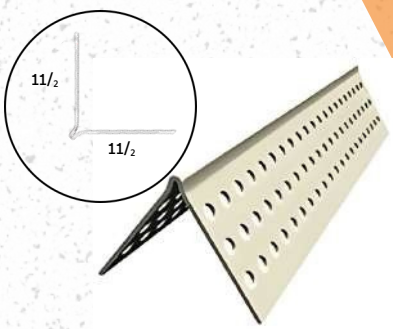


Items: 3403 - 3404

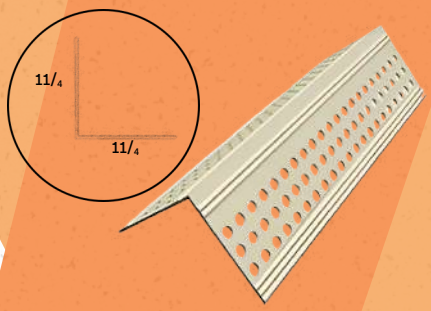


Items: 3405 - 3406


Item	Product Name	Description	Material	Right Flange	Left Flange	Package
3401	3401 - Corner bead	Corner bead with flanges sizes 1-1/4" x 1-1/4" and striations on exposed flanges - length 8'	PVC	1-1/4"	1-1/4"	100 units/box
3402	3402 - Corner bead	Corner bead with flanges sizes 1-1/4" x 1-1/4" and striations on exposed flanges - length 10'	PVC	1-1/4"	1-1/4"	100 units/box
3403	3403 - Corner bead	Corner bead with flanges sizes 1-1/2" x 1-1/2" - length 8'	PVC	1-1/2"	1-1/2"	100 units/box
3404	3404 - Corner bead	Corner bead with flanges sizes 1-1/2" x 1-1/2" - length 10'	PVC	1-1/2"	1-1/2"	100 units/box
3405	3405 - Corner bead	Corner Bead with flanges sizes 1-1/4" x 1-1/4" and striations on exposed flanges - length 8'	PVC	1-1/4"	1-1/4"	100 units/box
3406	3406 - Corner bead	Corner Bead with flanges sizes 1-1/4" x 1-1/4" and striations on exposed flanges - length 10'	PVC	1-1/4"	1-1/4"	100 units/box
3407	3407 - Durock corner bead	Corner Bead with flanges sizes 1-5/8" 1-5/8" - length 8'	PVC	1-5/8"	1-5/8"	100 units/box
3408	3408 - Durock corner bead	Corner Bead with flanges sizes 1-5/8" 1-5/8" - length 10'	PVC	1-5/8"	1-5/8"	100 units/box
3409	3409 - Flexible corner bead for archs	Flexible corner bead for archs with flanges sizes 1-1/4" x 1-1/4" - length 8'	PVC	1-1/4"	1-1/4"	100 units/box
3410	3410 - Flexible corner bead for archs	Flexible corner bead for archs with flanges sizes 1-1/4" x 1-1/4" - length 10'	PVC	1-1/4"	1-1/4"	100 units/box
3435	3435 - Stucco corner bead 2-1/2"	Corner bead with perforated flanges sizes 2-1/2" x 2-1/2" - length 8'	PVC	2-1/2"	2-1/2"	50 units/box
3436	3436 - Stucco corner bead 2-1/2"	Corner bead with perforated flanges sizes 2-1/2" x 2-1/2" - length 10'	PVC	2-1/2"	2-1/2"	50 units/box

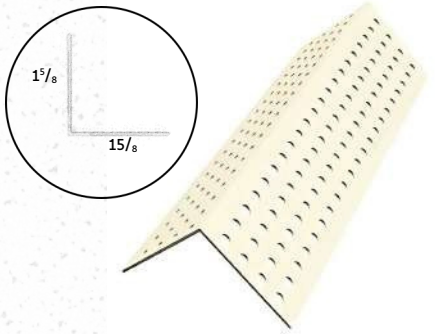

Items: 3407 - 3408
Durock

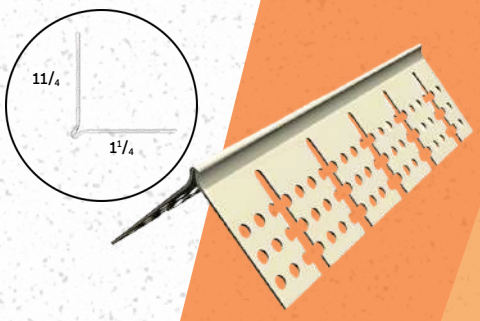


Items: 3409 - 3410
Flexible

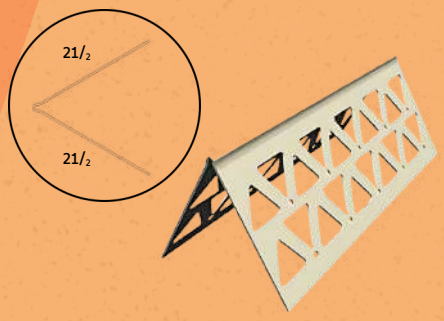


Items: 3435 - 3436
Stucco

J-BEADS


www.bennerproducts.com

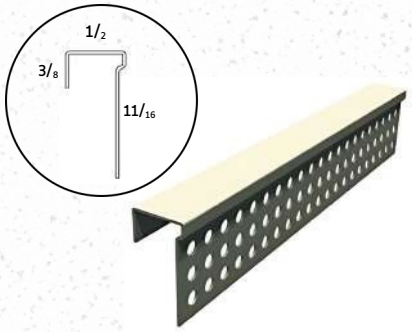

Items: 3411 - 3412

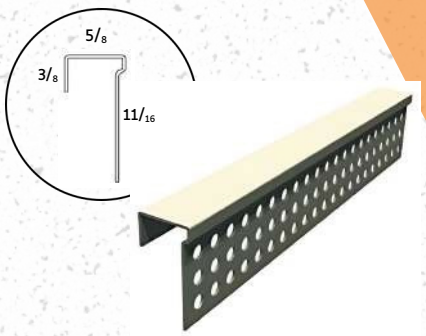


Items: 3413 - 3414

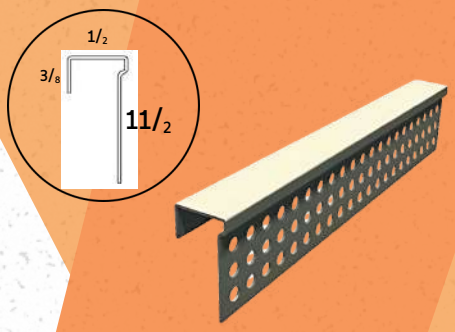


Items: 3415 - 3416
Durock

Codes	Product Name	Description	Material	Board Thickness	Front Return	Back Flange	Package
3411	3411 - J-Bead Perforated	1/2" J-Beads / 1-1/16" Perforated Back Flange / 3/8" Front Return / length 8'	PVC	1/2"	3/8"	1-1/16"	100 units/box
3412	3412 - J-Bead Perforated	1/2" J-Beads / 1-1/16" Perforated Back Flange / 3/8" Front Return / length 10'	PVC	1/2"	3/8"	1-1/16"	100 units/box
3413	3413 - J-Bead Perforated	5/8" J-Beads / 1-1/16" Perforated Back Flange / 3/8" Front Return / length 8'	PVC	5/8"	3/8"	1-1/16"	100 units/box
3414	3414 - J-Bead Perforated	5/8" J-Beads / 1-1/16" Perforated Back Flange / 3/8" Front Return / length 10'	PVC	5/8"	3/8"	1-1/16"	100 units/box
3415	3415 - Durock J-Bead Perforated	1/2" J-Beads / 1-1/2" Perforated Back Flange / 3/8" Front Return / length 8'	PVC	1/2"	3/8"	1-1/2"	100 units/box
3416	3416 - Durock J-Bead Perforated	1/2" J-Beads / 1-1/2" Perforated Back Flange / 3/8" Front Return / length 10'	PVC	1/2"	3/8"	1-1/2"	100 units/box
3417	3417 - J-Bead Solid	1/2" J-Beads / 1-1/8" Back Flange / 3/8" Front Return / length 8'	PVC	1/2"	3/8"	1-1/8"	100 units/box
3418	3418 - J-Bead Solid	1/2" J-Beads / 1-1/8" Back Flange / 3/8" Front Return / length 10'	PVC	1/2"	3/8"	1-1/8"	100 units/box
3419	3419 - J-Bead Solid	3/8" J-Beads / 1-1/8" Back Flange / 3/8" Front Return / length 8'	PVC	3/8"	3/8"	1-1/8"	100 units/box
3420	3420 - J-Bead Solid	3/8" J-Beads / 1-1/8" Back Flange / 3/8" Front Return / length 10'	PVC	3/8"	3/8"	1-1/8"	100 units/box

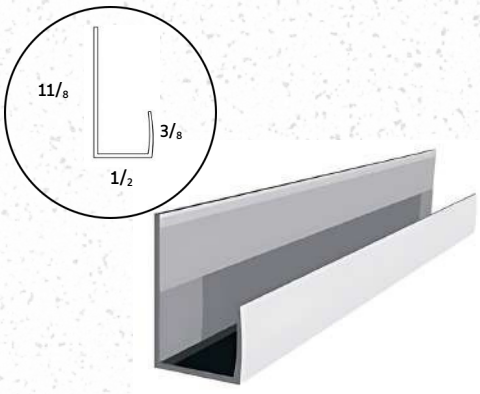


Items: 3417 - 3418

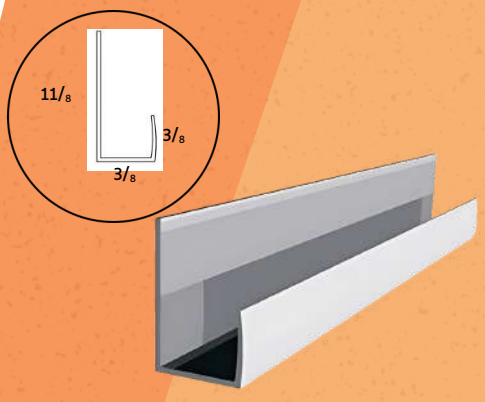


Items: 3419 - 3420

L-BEADS

www.bennerproducts.com

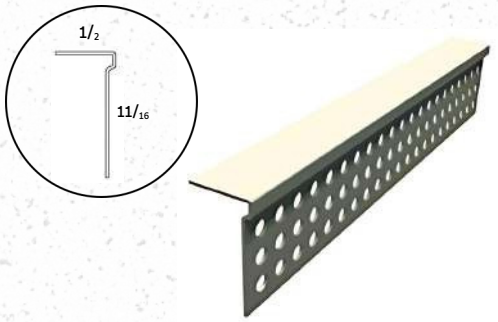


Items: 3421 - 3422

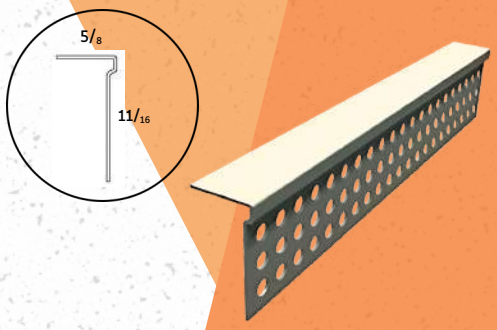

Items: 3423 - 3424

Codes	Product Name	Description	Material	Board Thickness	Flange	Package
3421	3421 - L-Bead Perforated	1/2" L-Beads / 1-1/16" Perforated Back Flange / length 8'	PVC	1/2"	1-1/16"	100 units/box
3422	3422 - L-Bead Perforated	1/2" L-Beads / 1-1/16" Perforated Back Flange / length 10'	PVC	1/2"	1-1/16"	100 units/box
3423	3423 - L-Bead Perforated	5/8" L-Beads / 1-1/16" Perforated Back Flange / length 8'	PVC	5/8"	1-1/16"	50 units/box
3424	3424 - L-Bead Perforated	5/8" L-Beads / 1-1/16" Perforated Back Flange / length 10'	PVC	5/8"	1-1/16"	50 units/box

Z-BEADS

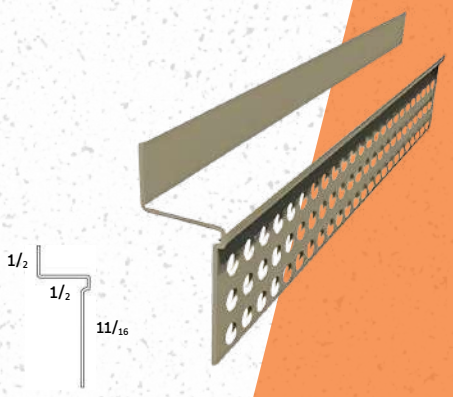


Items: 3425 - 3426

Codes	Product Name	Description	Material	Board Thickness	Front Return	Back Flange	Package
3425	3425 - Z-Bead Perforated	1/2" Z-Beads / 1-1/16" Perforated Back Flange / 1/2" Return / length 8'	PVC	1/2"	1/2"	1-1/6"	100 units/box
3426	3426 - Z-Bead Perforated	1/2" Z-Beads / 1-1/16" Perforated Back Flange / 1/2" Return / length 10'	PVC	1/2"	1/2"	1-1/6"	100 units/box


DRYWALL VINYL ACCESSORIES

www.bennerproducts.com

RADIUS BULLNOSE CORNER

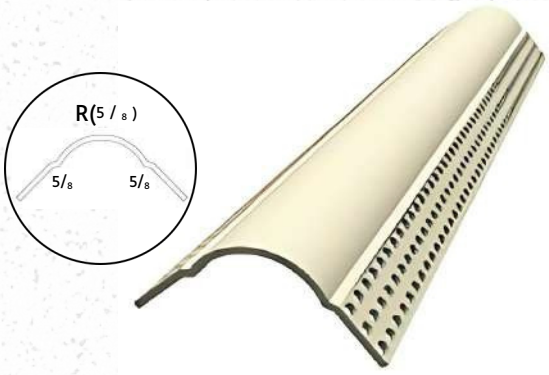


Items: 3427 - 3428

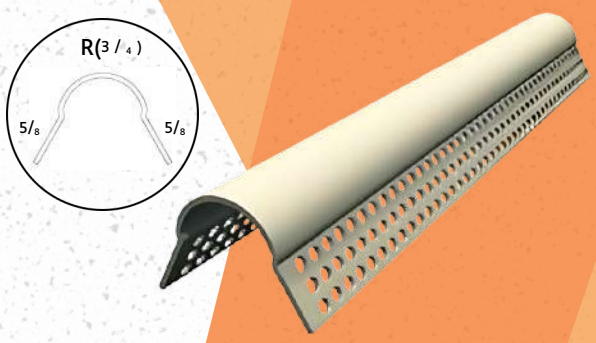


Items: 3429 - 3430

Codes	Product Name	Description	Material	Radius	Flange	Package
3427	3427 - Radius bullnose corner R-5/8"	Bull nose / 5/8" Perforated Flange / 5/8" radius / length 8'	PVC	5/8"	5/8"	100 units/box
3428	3428 - Radius bullnose corner R-5/8"	Bull nose / 5/8" Perforated Flange / 5/8" radius / length 10'	PVC	5/8"	5/8"	100 units/box
3429	3429 - Radius bullnose corner R-3/4""	Bull nose / 3/4" Perforated Flange / 5/8" radius / length 8'	PVC	3/4"	5/8"	50 units/box
3430	3430 - Radius bullnose corner R-3/4""	Bull nose / 3/4" Perforated Flange / 5/8" radius / length 10'	PVC	3/4"	5/8"	50 units/box

DRYWALL REVEALS

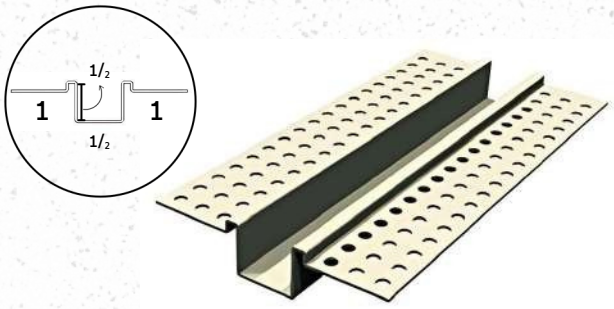

Items: 3431 - 3432

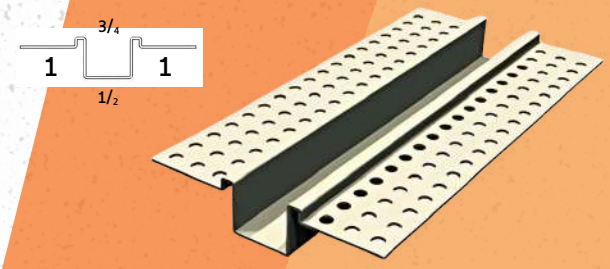


Items: 3433 - 3434

Codes	Product Name	Description	Material	Board Thickness	Expose Reveal	Right Flange	Left Flange	Package
3431	3431 - Drywall reveal	1/2" Drywall reveal width / 1" flanges / 1/2" expose reveal / length 8'	PVC	1/2"	1/2"	1"	1"	50 units/box
3432	3432 - Drywall reveal	1/2" Drywall reveal width / 1" flanges / 1/2" expose reveal / length 10'	PVC	1/2"	1/2"	1"	1"	50 units/box
3433	3433 - Drywall reveal	3/4" Drywall reveal width / 1" flanges / 1/2" expose reveal / length 8'	PVC	3/4"	1/2"	1"	1"	50 units/box
3434	3434 - Drywall reveal	3/4" Drywall reveal width / 1" flanges / 1/2" expose reveal / length 10'	PVC	3/4"	1/2"	1"	1"	50 units/box


DRYWALL VINYL ACCESSORIES

www.bennerproducts.com

CHANNEL REVEAL

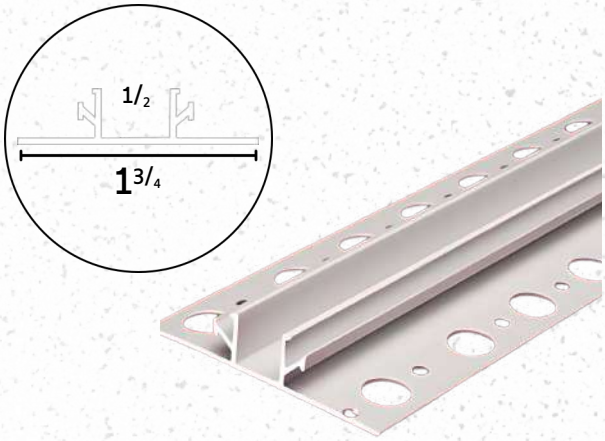


Items: 3441

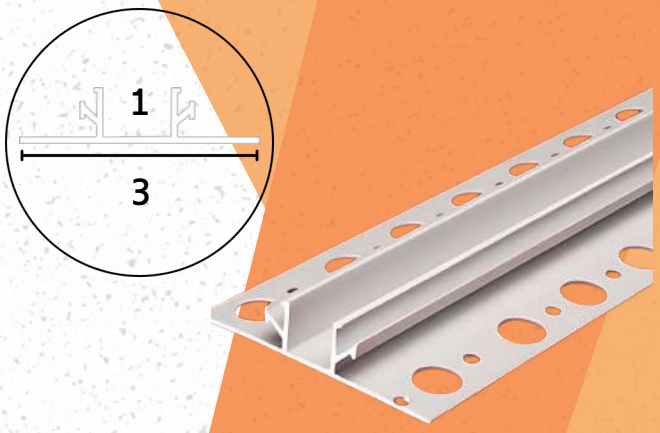


Items: 3442

Codes	Product Name	Description	Material	Reveal Size	Width	Package
3441	3441 - Chanel Reveal	1/2" board thickness / 1-3/4" width / length 10'	PVC	1/2"	1-3/4"	35 units/box
3442	3442 - Chanel Reveal	1" board thickness / 3" width / length 10'	PVC	1"	3"	35 units/box

CERAMIC JOINTS & FLANGE

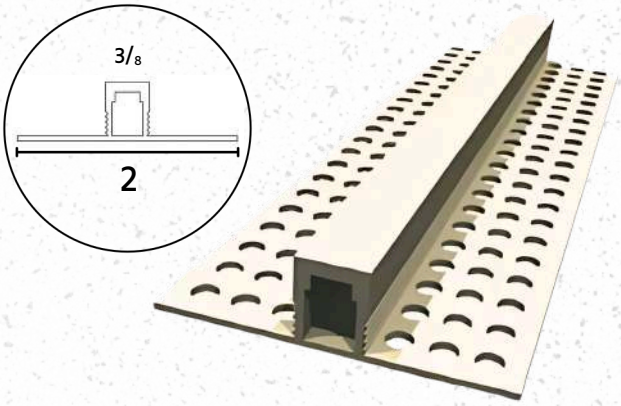


Items: 3443 - 3444
Ceramic Joint

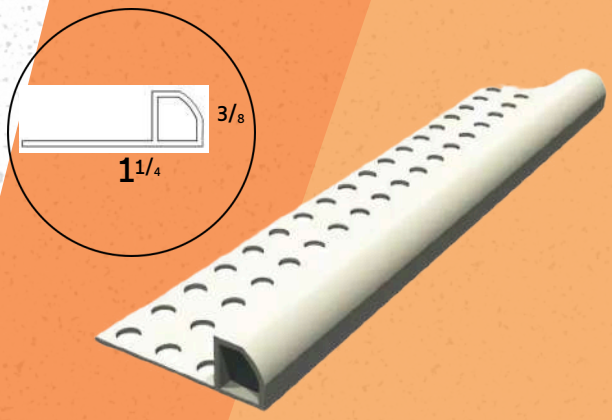


Items: 3445 - 3446
Flange

Codes	Product Name	Description	Material	Board Thickness	Width	Package
3443	3443 - Ceramic Joint	3/8" board thickness / 2" width perforated flange / length 8'	PVC	3/8"	2"	50 units/box
3444	3444 - Ceramic Joint	3/8" board thickness / 2" width perforated flange / length 10'	PVC	3/8"	2"	50 units/box
3445	3445 - Flage	3/8" flage / 1-1/4" perforated flange / length 8'	PVC	3/8"	1-1/4"	50 units/box
3446	3446 - Flage	3/8" flage / 1-1/4" perforated flange / length 10'	PVC	3/8"	1-1/4"	50 units/box

FLANGE




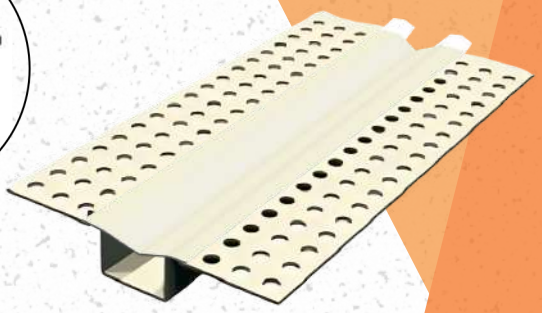


Items: 3447 - 3448

Codes	Product Name	Description	Material	Expose Reveal	Height	Width	Package
3447	3447 - Flage	3/8" flage / 1/2" height / 7/8" width flange / 3/8" expose reveal / length 8'	PVC	3/8"	1/2"	7/8"	60 units/box
3448	3448 - Flage	3/8" flage / 1/2" height / 7/8" width flange / 3/8" expose reveal / length 10'	PVC	3/8"	1/2"	7/8"	60 units/box

CASING BEADS

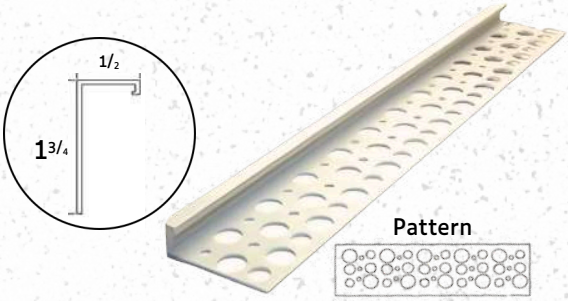


Items: 3437

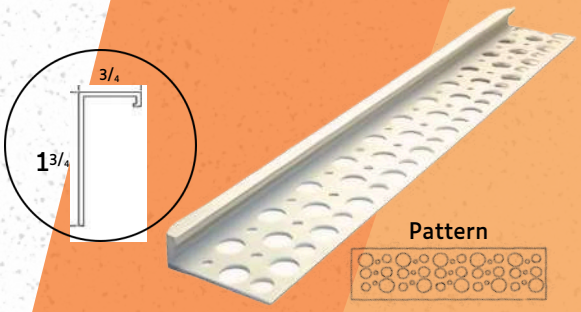


Items: 3438

Codes	Product Name	Description	Material	Board Thickness	Back Flange	Package
3437	3437 - Casing bead	1/2" casing bead / 1-3/4" perforated flange / length 10'	PVC	1/2"	1-3/4"	75 units/box
3438	3438 - Casing bead	3/4" casing bead / 1-3/4" perforated flange / length 10'	PVC	3/4"	1-3/4"	75 units/box
3439	3439 - Casing bead	5/8" casing bead / 1-3/4" perforated flange / length 10'	PVC	5/8"	1-3/4"	75 units/box
3440	3440 - Casing bead	1" casing bead / 1-3/4" perforated flange / length 10'	PVC	1"	1-3/4"	75 units/box

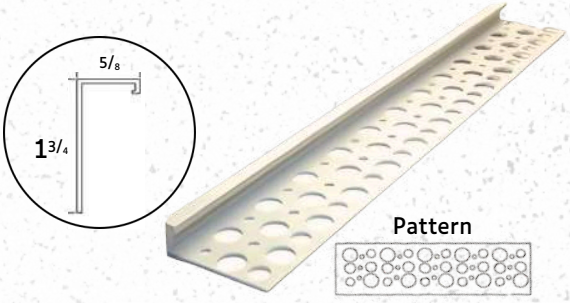


Items: 3439

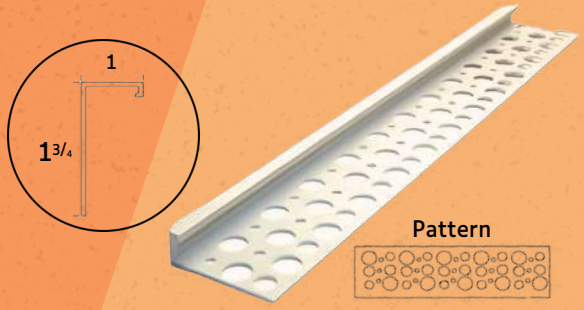


Items: 3440

EXPANSION JOINTS

www.bennerproducts.com

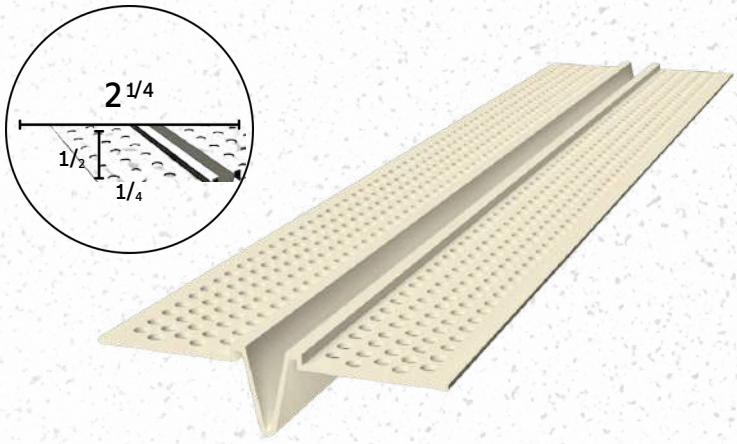

Items: 3449 - 3450

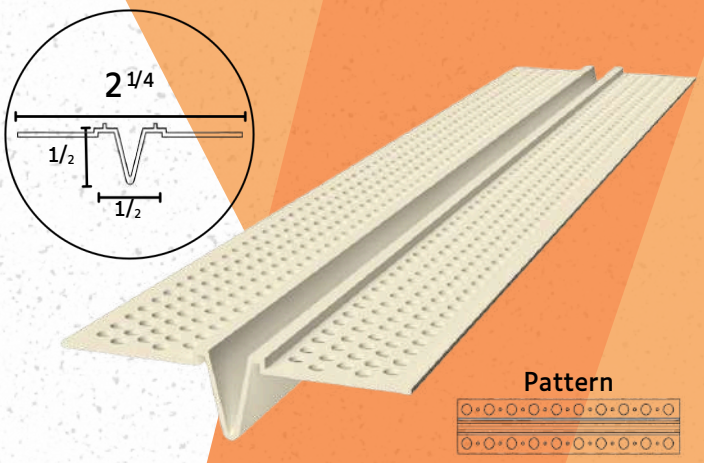


Pattern


Items: 3451 - 3452

Codes	Product Name	Description	Material	Expansion Joint	Expose Reveal Heith	Width	Package
3449	3449 - Expansion Joint	1/4" expansion joint / 2-1/4" width perforated flange / length 8'	PVC	1/4"	1/2"	2-1/4"	50 units/box
3450	3450 - Expansion Joint	1/4" expansion joint / 2-1/4" width perforated flange / length 10'	PVC	1/4"	1/2"	2-1/4"	50 units/box
3451	3451 - Expansion Joint	1/2" expansion joint / 2-1/4" width perforated flange / length 8'	PVC	1/2"	1/2"	2-1/4"	50 units/box
3452	3452 - Expansion Joint	1/2" expansion joint / 2-1/4" width perforated flange / length 10'	PVC	1/2"	1/2"	2-1/4"	50 units/box

FLASH COVE PVC

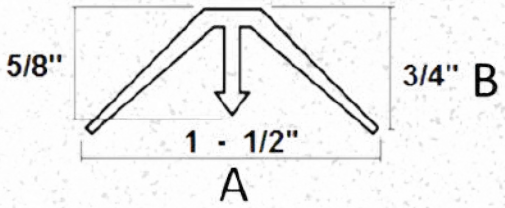

Items: 3453





Items: 3454

Codes	Product Name	Description	Material	Height (B)	Width (A)	Package
3453	3453 - Flash Cove	1-1/2" flash cove width / 3/4" height / length 10'	PVC	3/4"	1-1/2"	25 units/box
3454	3454 - Flash Cove	3-5/8" flash cove width / 3/8" height / length 10'	PVC	3/8"	3-5/8"	25 units/box

MESH CORNER BEAD

www.bennerproducts.com



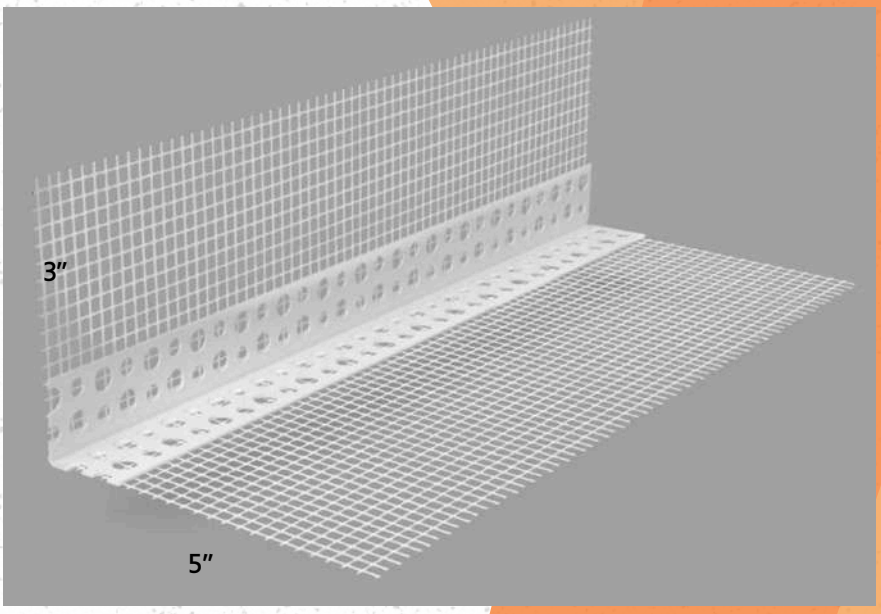

Items: 3455

Codes	Product Name	Description	Material	Right Flange	Left Flange	Package
3455	3455 - Mesh corner bead	Mesh corner bead 7/8" x 7/8" perforated flange plus 3" mesh in one leg x 5" mesh in other leg	PVC	7/8"	7/8"	50 units/box

LIGHTING



BACKLIT PANELS

LED PANELS

FRAME PANELS

GRILLE PANELS

BENNER PRODUCTS

LED PANELS



ROUND



Code	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
11000	3W	3 in (76.2 mm)	Recessed Round	Downlight Fixture	2 years	80	6000K	Blue-white	160 lumen	85-277V 50/60Hz	9V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
11001	6W	4 in (101.6 mm)	Recessed Round	Downlight Fixture	2 years	80	6000K	Blue-white	380 lumen	85-277V 50/60Hz	18V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
11002	12W	6 in (152.4 mm)	Recessed Round	Downlight Fixture	2 years	80	6000K	Blue-white	1020 lumen	85-277V 50/60Hz	36V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	30	3000



SQUARE



Code	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
11003	3W	3 in (76.2 mm)	Recessed Square	Downlight Fixture	2 years	80	6000K	Blue-white	160 lumen	85-277V 50/60Hz	9V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
11004	6W	4 in (101.6 mm)	Recessed Square	Downlight Fixture	2 years	80	6000K	Blue-white	380 lumen	85-277V 50/60Hz	18V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	100	1000
11005	12W	6 in (152.4 mm)	Recessed Square	Downlight Fixture	2 years	80	6000K	Blue-white	1020 lumen	85-277V 50/60Hz	36V 300mA	0.5	Yes	20	45°C	75°C	Voltage Resistance Test	Recessed	Interior	No	1	30	3000


LED PANELS



ROUND
BLACK
2-YEAR WARRANTY



Code	Rated Power	Size	Opening	Shape	Light Guide	Color Rendering (RA)	CCT	Light Color	Lumen	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Relative Humidity	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
11006	3W	3-5/8" (98 x 30 mm)	70mm	Recessed Round	Downlight Fixture	80	6500K	Blue-white	300 lumen	AC85-265V/50-60Hz	3-11 VDC	0.5	Yes	20	45ºC	75ºC	10% - 90% RH	Recessed	Interior	No	1	100	1000
11007	5W	4" (108 x 30 mm)	80mm	Recessed Round	Downlight Fixture	80	6500K	Blue-white	500 lumen	AC85-265V/50-60Hz	3-11 VDC	0.5	Yes	20	45ºC	75ºC	10% - 90% RH	Recessed	Interior	No	1	100	1000

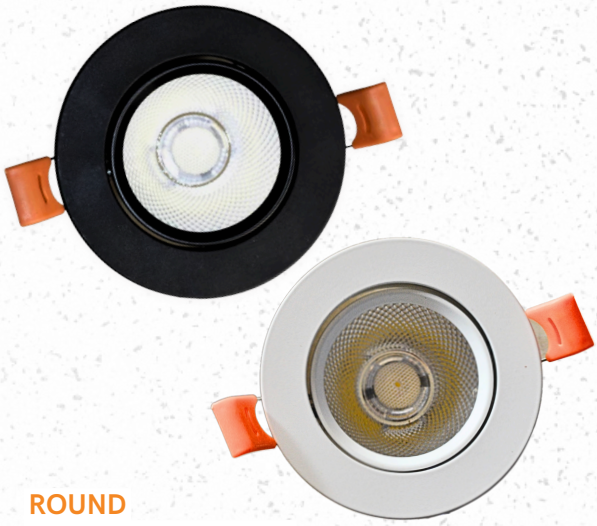



ROUND
2-YEAR WARRANTY



Code	Rated Power	Size	Opening	Shape	Light Guide	Color Rendering (RA)	CCT	Light Color	Lumen	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Relative Humidity	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
11008 Black	5W	3-1/2" (85 x 48 mm)	70mm	Recessed Round	Downlight Fixture	80	6500K	Blue-white	500 lumen	AC85-265V/50-60Hz	12-18 VDC	0.5	Yes	20	45ºC	75ºC	10% - 90% RH	Recessed	Interior	No	1	100	1000
11009 White	5W	3-1/2" (85 x 48 mm)	70mm	Recessed Round	Downlight Fixture	80	6500K	Blue-white	500 lumen	AC85-265V/50-60Hz	12-18 VDC	0.5	Yes	20	45ºC	75ºC	10% - 90% RH	Recessed	Interior	No	1	100	1000


BACKLIT PANELS

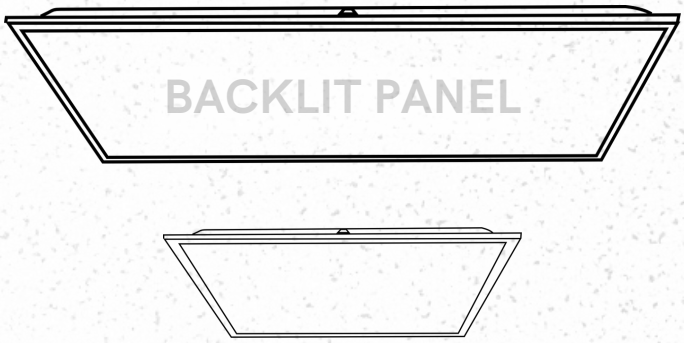

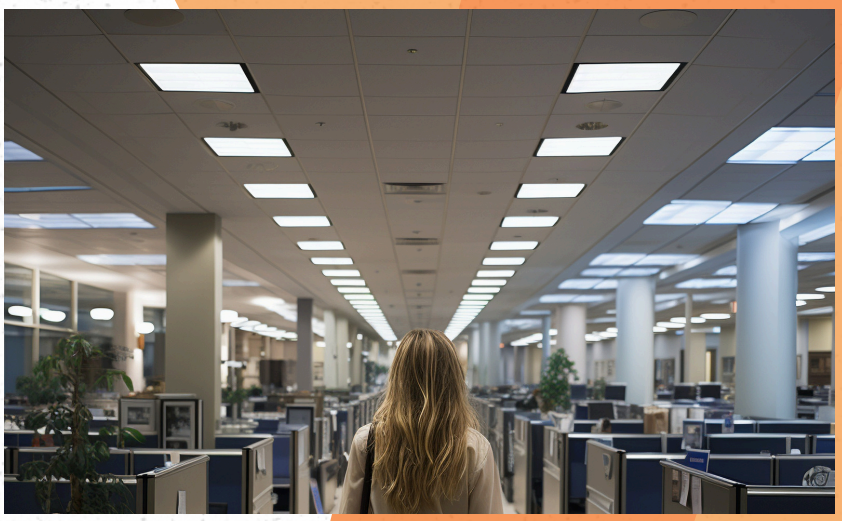

Code	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
12000	40W	24" x 24" (603 x 603 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1000mA	1	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	0	8	800
12001	80W	24" x 48" (603 x 1213 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1000mA	1	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	1	4	800


FRAME PANELS

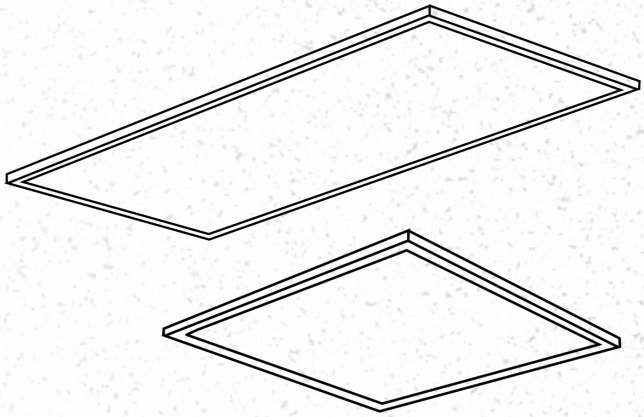



Code	Rated Power	Size	Shape	Light Guide	Warranty	Color Rendering (RA)	CCT	Light Color	Lumen efficacy	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Safety	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
12002	40W	24" x 24" (603 x 603 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1000mA	1	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	2	10	1000
12003	60W	24" x 48" (603 x 1213 mm)	Recessed Square	downward diffuser	3 years	80	6000K	Blue-white	110 lumen / W	85-277V 50/60Hz	27-42V 1400mA	1	Yes	20	45°C	75°C	Class II	Recessed mounting in grid ceilings	Interior	No	2	10	1000

LED GRILLE LIGHT

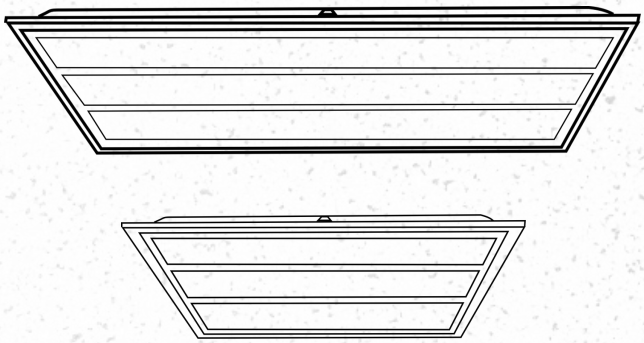



Code	Rated Power	Size	Opening	Shape	Light Guide	Color Rendering (RA)	CCT	Light Color	Lumen	Input Voltage	Output	Power Factor (PF)	Flicker Free	Ingress Protection (IP)	Ambient Temperature (Ta)	Case Temperature (Tc)	Relative Humidity	Installation	Use	Dimmable	pcs/inner box	pcs/carton	MOQ
12004	36W	24" x 24" (603 x 603 mm)	NA	Recessed Square	PS - Diffuser	≥Ra 80	6500K	Blue-white	3960 lumen	AC100-277V / 50-60HZ	24-42V 900mA	≥0.9	Yes	20	-20°C	50°C	10% - 90% RH	Recessed	Interior	No	2	10	1000
12005	60W	24" x 48" (603 x 1213 mm)	NA	Recessed Square	PS - Diffuser	≥Ra 80	6500K	Blue-white	6600 lumen	AC100-277V / 50-60HZ	24-42V 1550mA	≥0.9	Yes	20	-20°C	50°C	10% - 90% RH	Recessed	Interior	No	2	6	1000

Lighting fixtures are powerful tools in interior design that go beyond mere illumination. By selecting and utilizing the right fixtures, you can create functional, aesthetically pleasing spaces that promote the well-being of occupants.









SCREWS



Cement Board Screws



Drywall Screws



Metal Building Screws




Concrete Screws

BENNER PRODUCTS


SCREWS CHARACTERISTICS

HEAD STYLES

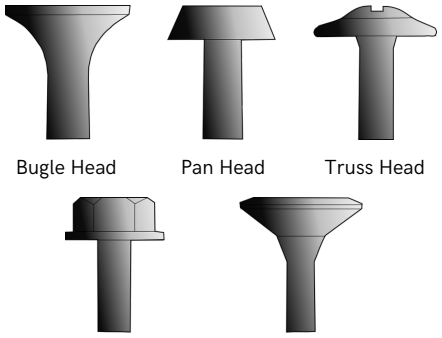


Bugle Head | Pan Head | Truss Head | Hex Washer Head | Countersunk Head

POINT STYLES




Sharp Point | Self-Drilling Point

THREAD STYLES




Fine Thread | Hi-Lo Thread

CEMENT BOARD SCREW

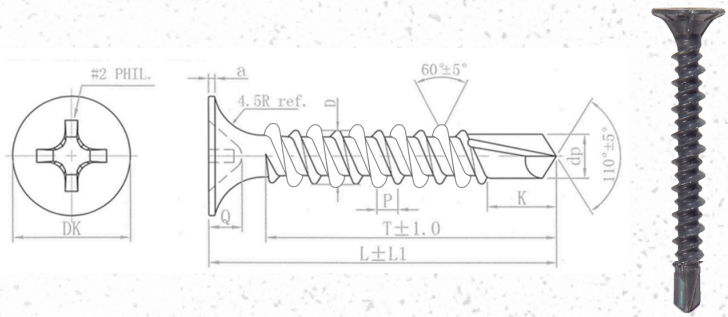


Finish	Color	For Use On (Material)	Corrosion Resistance
Zinc (electroplated)	White & Zinc Plated	All metals	Good
Phosphate	Black	Metal Stud Gypsum Board Wood Compose Panel	Very Good
Ceramic	Grey	Gutters Metal Roofs Wood Compose Panel	Excellent


Commercial Code	Name	Size	Head Drives	Head	Thread	Coated	Point	Screw Color	Packaging	MOQ
5626	Screw #9 - 1-1/4" - Grey	#9 x 1-1/4"	Phillips	Countersunk	Hi-Lo	Ceramic	Self Drill	Grey	1lb	100
5626-5	Screw #9 - 1-1/4" - Grey	#9 x 1-1/4"	Phillips	Countersunk	Hi-Lo	Ceramic	Self Drill	Grey	5lb	50
5626-25	Screw #9 - 1-1/4" - Grey	#9 x 1-1/4"	Phillips	Countersunk	Hi-Lo	Ceramic	Self Drill	Grey	25lb	50




Board to Frame



Board to Wood




DRYWALL SCREWS

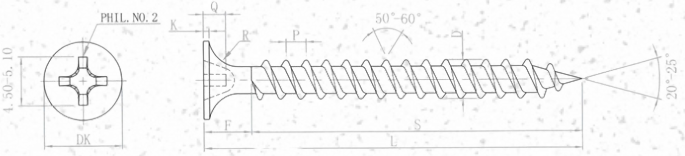






Finish	Color	For Use On (Material)	Corrosion Resistance
Zinc (electroplated)	White & Zinc Plated	All metals	Good
Phosphate	Black	Metal Stud Gypsum Board Wood Compose Panel	Very Good
Ceramic	Grey	Gutters Metal Roofs Wood Compose Panel	Excellent

Commercial Code	Name	Size	Head Drives	Head	Thread	Coated	Point	Screw Color	Packaging	MOQ
5614	Screw #6 - 1-1/4" - Black	#6 x 1-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	1lb	100
5612	Screw #6 - 1-5/8" - Black	#6 x 1-5/8"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	1lb	100
5620	Screw #8 - 2-1/4" - Black	#8 x 2-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	1lb	100
5622	Screw #8 - 2-5/8" - Black	#8 x 2-5/8"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	1lb	100
5624	Screw #8 - 3-1/4" - Black	#8 x 3-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	1lb	100
5614-5	Screw #6 - 1-1/4" - Black	#6 x 1-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	5lb	50
5612-5	Screw #6 - 1-5/8" - Black	#6 x 1-5/8"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	5lb	50
5620-5	Screw #8 - 2-1/4" - Black	#8 x 2-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	5lb	50
5622-5	Screw #8 - 2-5/8" - Black	#8 x 2-5/8"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	5lb	50
5624-5	Screw #8 - 3-1/4" - Black	#8 x 3-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	5lb	50
5614-25	Screw #6 - 1-1/4" - Black	#6 x 1-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	25lb	50
5612-25	Screw #6 - 1-5/8" - Black	#6 x 1-5/8"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	25lb	50
5620-25	Screw #8 - 2-1/4" - Black	#8 x 2-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	25lb	50
5622-25	Screw #8 - 2-5/8" - Black	#8 x 2-5/8"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	25lb	50
5624-25	Screw #8 - 3-1/4" - Black	#8 x 3-1/4"	Phillips	Bugle head	Fine	Phosphate	Sharp	Black	25lb	50



Board to Frame


Board to Wood


Frame to Frame

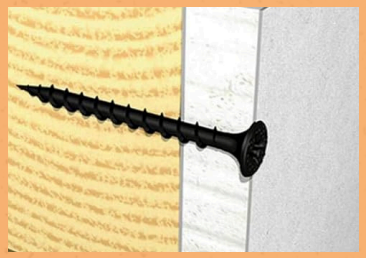


DRYWALL SCREWS

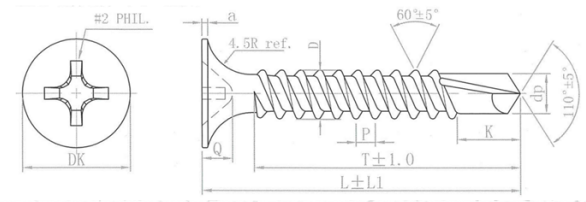




Finish	Color	For Use On (Material)	Corrosion Resistance
Zinc (electroplated)	White & Zinc Plated	All metals	Good
Phosphate	Black	Metal Stud Gypsum Board Wood Compose Panel	Very Good
Ceramic	Grey	Gutters Metal Roofs Wood Compose Panel	Excellent


Commercial Code	Name	Size	Head Drives	Head	Thread	Coated	Point	Screw Color	Packaging	MOQ
5613	Screw#6 - 1-5/8" - Zinc Plated	#6 x 1-5/8"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	1lb	100
5615	Screw #6 - 1-1/4" - Zinc Plated	#6 x 1-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	1lb	100
5621	Screw #8 - 2-1/4" - Zinc	#8 x 2-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	1lb	100
5623	Screw #8 - 2-5/8" - Zinc	#8 x 2-5/8"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	1lb	100
5625	Screw #8 - 3-1/4"" - Zinc	#8 x 3-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	1lb	100
5613-5	Screw#6 - 1-5/8" - Zinc Plated	#6 x 1-5/8"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	5lb	50
5615-5	Screw #6 - 1-1/4" - Zinc Plated	#6 x 1-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	5lb	50
5621-5	Screw #8 - 2-1/4" - Zinc	#8 x 2-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	5lb	50
5623-5	Screw #8 - 2-5/8" - Zinc	#8 x 2-5/8"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	5lb	50
5625-5	Screw #8 - 3-1/4"" - Zinc	#8 x 3-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	5lb	50
5613-25	Screw#6 - 1-5/8" - Zinc Plated	#6 x 1-5/8"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	25lb	50
5615-25	Screw #6 - 1-1/4" - Zinc Plated	#6 x 1-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	25lb	50
5621-25	Screw #8 - 2-1/4" - Zinc	#8 x 2-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	25lb	50
5623-25	Screw #8 - 2-5/8" - Zinc	#8 x 2-5/8"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	25lb	50
5625-25	Screw #8 - 3-1/4"" - Zinc	#8 x 3-1/4"	Phillips	Bugle head	Fine	Zinc Plated	Self Drill	Zinc	25lb	50




Board to Frame




Board to Wood



Frame to Frame

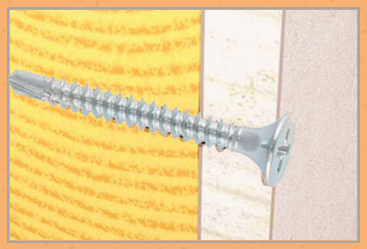

METAL BUILDING SCREWS

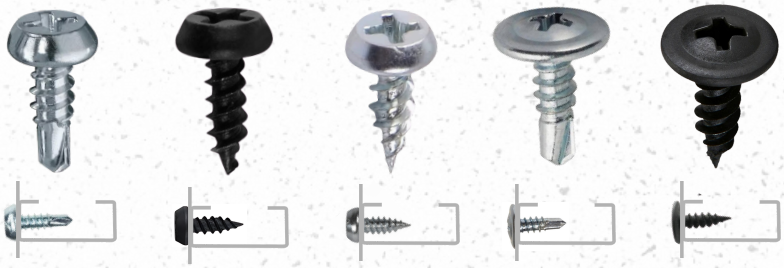

Code 5616 | Code 5617 | Code 5647 | Code 5618 | Code 5619

Finish	Color	For Use On (Material)	Corrosion Resistance
Zinc (electroplated)	White & Zinc Plated	All metals	Good
Phosphate	Black	Metal Stud Gypsum Board Wood Compose Panel	Very Good
Ceramic	Grey	Gutters Metal Roofs Wood Compose Panel	Excellent


Commercial Code	Name	Size	Head Drives	Head	Thread	Coated	Point	Screw Color	Packaging	MOQ
5616	Screw #7 - 7/16" - Zinc	#7 x 7/16"	Phillips	Pan head	Fine	Zinc Plated	Self Drill	Zinc	1lb	100
5617	Screw #7 - 7/16" - Black	#7 x 7/16"	Phillips	Pan head	Fine	Phosphate	Sharp	Black	1lb	100
5647	Screw #7 - 7/16" - Zinc	#7 x 7/16"	Phillips	Pan head	Fine	Zinc Plated	Sharp	Zinc	1lb	100
5618	Screw #8 - 1/2" - Zinc	#8 x 1/2"	Phillips	Truss head	Fine	Zinc Plated	Self Drill	Zinc	1lb	100
5619	Screw #8 - 1/2" - Black	#8 x 1/2"	Phillips	Truss head	Fine	Phosphate	Sharp	Black	1lb	100
5616-5	Screw #7 - 7/16" - Zinc	#7 x 7/16"	Phillips	Pan head	Fine	Zinc Plated	Self Drill	Zinc	5lb	50
5617-5	Screw #7 - 7/16" - Black	#7 x 7/16"	Phillips	Pan head	Fine	Phosphate	Sharp	Black	5lb	50
5647-5	Screw #7 - 7/16" - Zinc	#7 x 7/16"	Phillips	Pan head	Fine	Zinc Plated	Sharp	Zinc	5lb	50
5618-5	Screw #8 - 1/2" - Zinc	#8 x 1/2"	Phillips	Truss head	Fine	Zinc Plated	Self Drill	Zinc	5lb	50
5619-5	Screw #8 - 1/2" - Black	#8 x 1/2"	Phillips	Truss head	Fine	Phosphate	Sharp	Black	5lb	50
5616-25	Screw #7 - 7/16" - Zinc	#7 x 7/16"	Phillips	Pan head	Fine	Zinc Plated	Self Drill	Zinc	25lb	50
5617-25	Screw #7 - 7/16" - Black	#7 x 7/16"	Phillips	Pan head	Fine	Phosphate	Sharp	Black	25lb	50
5647-25	Screw #7 - 7/16" - Zinc	#7 x 7/16"	Phillips	Pan head	Fine	Zinc Plated	Sharp	Zinc	25lb	50
5618-25	Screw #8 - 1/2" - Zinc	#8 x 1/2"	Phillips	Truss head	Fine	Zinc Plated	Self Drill	Zinc	25lb	50
5619-25	Screw #8 - 1/2" - Black	#8 x 1/2"	Phillips	Truss head	Fine	Phosphate	Sharp	Black	25lb	50



Metal Building



Board to Frame





Frame to Frame

CONCRETE SCREWS

Finish	Color	For Use On (Material)	Corrosion Resistance
Zinc (electroplated)	White & Zinc Plated	All metals	Good
Phosphate	Black	Metal Stud Gypsum Board Wood Compose Panel	Very Good
Ceramic	Grey	Gutters Metal Roofs Wood Compose Panel	Excellent



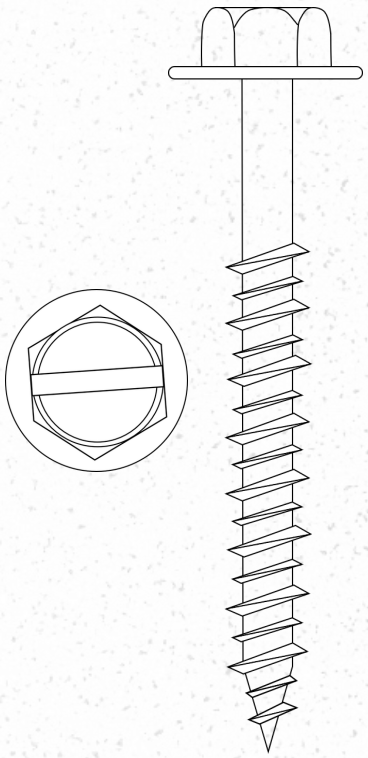

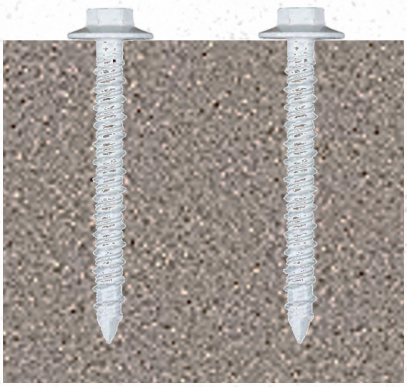



Commercial Code	Name	Size	Head Drives	Head	Thread	Coated	Point	Screw Color	Packaging	MOQ
5627	HX Screw 1/4" x 1-1/4" - White	1/4" x 1-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5628	HX Screw 1/4" x 1-3/4" - White	1/4" x 1-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5629	HX Screw 1/4" x 2-1/4" - White	1/4" x 2-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5630	HX Screw 1/4" x 2-3/4" - White	1/4" x 2-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5631	HX Screw 1/4" x 3-1/2" - White	1/4" x 3-1/2"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5632	HX Screw 3/16" x 1-1/4" - White	3/16" x 1-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5633	HX Screw 3/16" x 1-3/4" - White	3/16" x 1-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5634	HX Screw 3/16" x 2-1/4" - White	3/16" x 2-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5635	HX Screw 3/16" x 2-3/4" - White	3/16" x 2-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5636	HX Screw 3/16" x 3-1/2" - White	3/16" x 3-1/2"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	1lb	100
5627-5	HX Screw 1/4" x 1-1/4" - White	1/4" x 1-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5628-5	HX Screw 1/4" x 1-3/4" - White	1/4" x 1-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5629-5	HX Screw 1/4" x 2-1/4" - White	1/4" x 2-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5630-5	HX Screw 1/4" x 2-3/4" - White	1/4" x 2-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5631-5	HX Screw 1/4" x 3-1/2" - White	1/4" x 3-1/2"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5632-5	HX Screw 3/16" x 1-1/4" - White	3/16" x 1-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5633-5	HX Screw 3/16" x 1-3/4" - White	3/16" x 1-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5634-5	HX Screw 3/16" x 2-1/4" - White	3/16" x 2-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5635-5	HX Screw 3/16" x 2-3/4" - White	3/16" x 2-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5636-5	HX Screw 3/16" x 3-1/2" - White	3/16" x 3-1/2"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	5lb	50
5627-25	HX Screw 1/4" x 1-1/4" - White	1/4" x 1-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5628-25	HX Screw 1/4" x 1-3/4" - White	1/4" x 1-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5629-25	HX Screw 1/4" x 2-1/4" - White	1/4" x 2-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5630-25	HX Screw 1/4" x 2-3/4" - White	1/4" x 2-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5631-25	HX Screw 1/4" x 3-1/2" - White	1/4" x 3-1/2"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5632-25	HX Screw 3/16" x 1-1/4" - White	3/16" x 1-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5633-25	HX Screw 3/16" x 1-3/4" - White	3/16" x 1-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5634-25	HX Screw 3/16" x 2-1/4" - White	3/16" x 2-1/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5635-25	HX Screw 3/16" x 2-3/4" - White	3/16" x 2-3/4"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50
5636-25	HX Screw 3/16" x 3-1/2" - White	3/16" x 3-1/2"	Slotted Hex	Hex Washer	Hi-Lo	White zinc plated	Sharp	White	25lb	50

CONCRETE SCREWS

Finish	Color	For Use On (Material)	Corrosion Resistance
Zinc (electroplated)	White & Zinc Plated	All metals	Good
Phosphate	Black	Metal Stud Gypsum Board Wood Compose Panel	Very Good
Ceramic	Grey	Gutters Metal Roofs Wood Compose Panel	Excellent



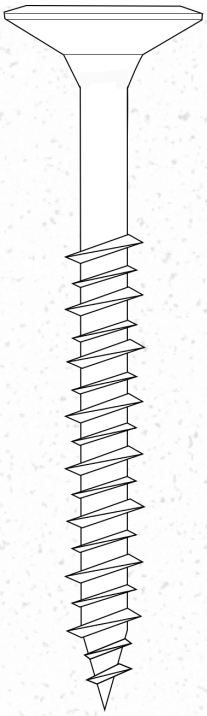





Commercial Code	Name	Size	Head Drives	Head	Thread	Coated	Point	Screw Color	Packaging	MOQ
5637	FH Screw 1/4" x 1-1/4" - White	1/4" x 1-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5638	FH Screw 1/4" x 1-3/4" - White	1/4" x 1-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5639	FH Screw 1/4" x 2-1/4" - White	1/4" x 2-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5640	FH Screw 1/4" x 2-3/4" - White	1/4" x 2-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5641	FH Screw 1/4" x 3-1/2" - White	1/4" x 3-1/2"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5642	FH Screw 3/16" x 1-1/4" - White	3/16" x 1-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5643	FH Screw 3/16" x 1-3/4" - White	3/16" x 1-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5644	FH Screw 3/16" x 2-1/4" - White	3/16" x 2-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5645	FH Screw 3/16" x 2-3/4" - White	3/16" x 2-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5646	FH Screw 3/16" x 3-1/2" - White	3/16" x 3-1/2"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	100
5637-5	FH Screw 1/4" x 1-1/4" - White	1/4" x 1-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5638-5	FH Screw 1/4" x 1-3/4" - White	1/4" x 1-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5639-5	FH Screw 1/4" x 2-1/4" - White	1/4" x 2-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5640-5	FH Screw 1/4" x 2-3/4" - White	1/4" x 2-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5641-5	FH Screw 1/4" x 3-1/2" - White	1/4" x 3-1/2"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5642-5	FH Screw 3/16" x 1-1/4" - White	3/16" x 1-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5643-5	FH Screw 3/16" x 1-3/4" - White	3/16" x 1-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5644-5	FH Screw 3/16" x 2-1/4" - White	3/16" x 2-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5645-5	FH Screw 3/16" x 2-3/4" - White	3/16" x 2-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5646-5	FH Screw 3/16" x 3-1/2" - White	3/16" x 3-1/2"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5637-25	FH Screw 1/4" x 1-1/4" - White	1/4" x 1-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5638-25	FH Screw 1/4" x 1-3/4" - White	1/4" x 1-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5639-25	FH Screw 1/4" x 2-1/4" - White	1/4" x 2-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5640-25	FH Screw 1/4" x 2-3/4" - White	1/4" x 2-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5641-25	FH Screw 1/4" x 3-1/2" - White	1/4" x 3-1/2"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5642-25	FH Screw 3/16" x 1-1/4" - White	3/16" x 1-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5643-25	FH Screw 3/16" x 1-3/4" - White	3/16" x 1-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5644-25	FH Screw 3/16" x 2-1/4" - White	3/16" x 2-1/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5645-25	FH Screw 3/16" x 2-3/4" - White	3/16" x 2-3/4"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50
5646-25	FH Screw 3/16" x 3-1/2" - White	3/16" x 3-1/2"	Phillips	Countersunk	Hi-Lo	White zinc plated	Sharp	White	100/pcs	50


FASTENERS



Powder-Driven Pins



Powder-Actuated Fastening Tools

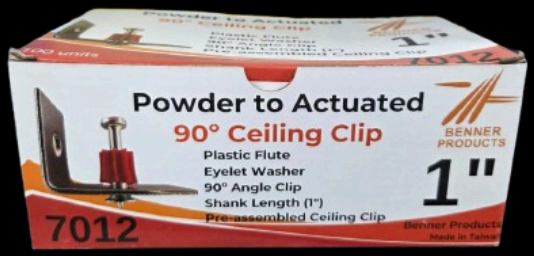

Ceiling Clip




Hammer-Drive Fasteners



Crimp Loads–Strips & Single Shots

BENNER PRODUCTS

POWDER-DRIVEN PINS

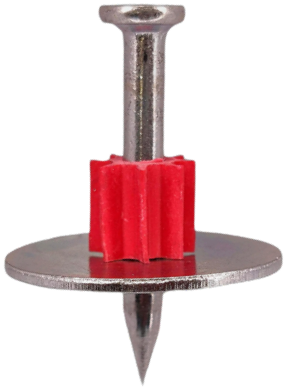PICTURE	CODE	NOMBRE	DESCRIPTION	SIZE	UNITS / BOX
	7001	Flat Head Pins with plastic flute	Powder-Driven Pins hardened-steel (fasten building components to steel)	5/8"	100 units
	7002	Flat Head Pins with plastic flute	Powder-Driven Pins hardened-steel (fasten building components to concrete and CMU)	1"	100 units
	7003	Flat Head Pins with plastic flute	Powder-Driven Pins hardened-steel (fasten building components to concrete and CMU)	1-1/4"	100 units
	7004	Flat Head Pins with plastic flute	Powder-Driven Pins hardened-steel (fasten building components to concrete and CMU)	1-1/2"	100 units
	7005	Flat Head Washered Pins with plastic flute and metal washer	Powder-Driven Pins with 1" Washer (fasten building components to concrete and CMU)	1"	100 units
	7006	Flat Head Washered Pins with plastic flute and metal washer	Powder-Driven Pins with 1-1/4" Washer (fasten building components to concrete and CMU)	1-1/4"	100 units
	7007	Flat Head Washered Pins with plastic flute and metal washer	Powder-Driven Pins with 1" Washer (fasten building components to concrete and CMU)	1-1/2"	100 units
	7008	Flat Head Pins with plastic washer	The PDPA consists of a fastener with a 0.300"-diameter head and a 0.157"-diameter shank. (fasten building components to concrete and CMU)	3/4"	100 units
	7009	Flat Head Washered Pins with plastic washer and metal washer	Powder-Driven Pins with 3/4" Washer. (fasten building components to concrete and CMU)	3/4"	100 units

Example: Concrete:



Example: Steel:




MOQ: 500 boxes

*For orders of a single item or a combination of items

HAMMER-DRIVE FASTENERS

PICTURE	CODE	NOMBRE	DESCRIPTION	SIZE	UNITS / BOX
	7010	1/4" Flat Head Pins with metal washer and shank diameter 3.3 mm	Hammer-Drive Fastener / 1/4"-diameter head with 3/8"-diameter metal washer	3/4"	100 units
	7011	1/4" Flat Head Pins with metal washer and shank diameter 3.63 mm	Hammer-Drive Fastener / 1/4"-diameter head with 3/8"-diameter metal washer	1"	100 units




CEILING CLIPS

PICTURE	CODE	NOMBRE	DESCRIPTION	SIZE	UNITS / BOX
	7012	Pre-Assembled Ceiling Clip	Powder-Actuated 90° Ceiling Clip	1-1/16"	100 units

POWDER-ACTUATED FASTENING TOOLS

PICTURE	CODE	NOMBRE	DESCRIPTION	SIZE	UNITS / BOX
	7013	PT-22 Semi automatic Tool with carry case	General-Purpose Tool, powder-actuated direct fastening tool / Three levels of power: brown through yellow loads (levels 2–4) WITH Maintenance kit	NA	1 unit
	7014	PT-27 Semi automatic Tool with carry case	Powder-actuated direct fastening tool / Semi automatic tool, flat piston with carry case and maintenance kit	NA	1 unit

CRIMP LOADS – STRIPS & SINGLE SHOTS

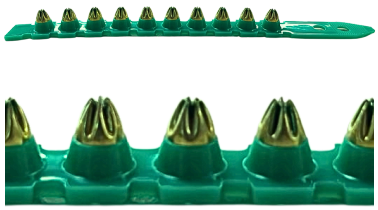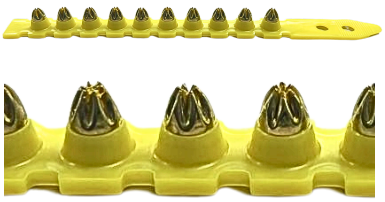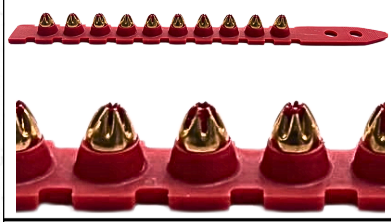PICTURE	CODE	NOMBRE	DESCRIPTION	SIZE	UNITS / BOX
	7015	Cal .27 Strip Power Loads - Brown	0.27-Caliber Plastic, 10-Shot Strip Loads * Strip loads for powder-actuated tools #2 - Brown / Marrón.	0.27	100 shots
	7016	Cal .27 Strip Power Loads - Green	0.27-Caliber Plastic, 10-Shot Strip Loads * Strip loads for powder-actuated tools #3 - Green / Verde.	0.27	100 shots
	7017	Cal .27 Strip Power Loads - Yellow	0.27-Caliber Plastic, 10-Shot Strip Loads * Strip loads for powder-actuated tools #4 - Yellow / Amarillo.	0.27	100 shots
	7018	Cal .27 Strip Power Loads - Red	0.27-Caliber Plastic, 10-Shot Strip Loads * Strip loads for powder-actuated tools #5 - Red / Rojo.	0.27	100 shots
	7020	Cal .22 Single Power Loads - Brown	0.22-Caliber “A” Crimp Loads – Single * Single loads for powder-actuated tools #2 - Brown / Marrón.	0.22	100 shots
	7021	Cal .22 Single Power Loads - Green	0.22-Caliber “A” Crimp Loads – Single * Single loads for powder-actuated tools #3 - Green / Verde.	0.22	100 shots
	7022	Cal .22 Single Power Loads - Yellow	0.22-Caliber “A” Crimp Loads – Single * Single loads for powder-actuated tools #4 - Yellow / Amarillo.	0.22	100 shots

COMMERCIAL TAPES



Joint Mesh Tapes



Paper Joint Tape



Metal Corner Tape

BENNER PRODUCTS

COMMERCIAL TAPES



ITEM - 0100



ITEM - 0101



Self-adhesive fiberglass mesh for stronger joints.

Item	Product Name	Sales Unit	Width	Length	Weight	Material	Density	Content of resin	Tensile Strenght (N/50mm)
0100	Adhesive Fiberglass Mesh tape	Roll	50.8 mm (2 in)	30.48 m (100 ft)	60 ± 5 g/m2	Warp: 33 tex x 2 Weft: 62 tex	Warp: 8 counts / in Weft: 8 count / in	≥26%	Warp: ≥550 N/50mm Weft: ≥500 N/50mm
0101	Adhesive Fiberglass Mesh tape	Roll	50.8 mm (2 in)	91.44 m (300 ft)	60 ± 5 g/m2	Warp: 33 tex x 2 Weft: 62 tex	Warp: 8 counts / in Weft: 8 count / in	≥26%	Warp: ≥550 N/50mm Weft: ≥500 N/50mm



ITEM - 0102



ITEM - 0103


Item	Product Name	Sales Unit	Width	Length	Weight	Thickness
0102	Paper Joint Tape	Roll	52 mm (2-1/16 in)	76.2 m (250 ft)	130 ± 5 g/m2	195-205 µm
0103	Metal Corner Tape	Roll	50 mm (1.97 in)	30 m (98.4 ft)	1.4 ± 10% kg/roll	12 – 18 µm (galvanized coating) 0.22 – 0.23 mm (steel) 210 – 230 µm (paper)

Gypsum Board Panels



SPGLASS

Eco Batt Insulation

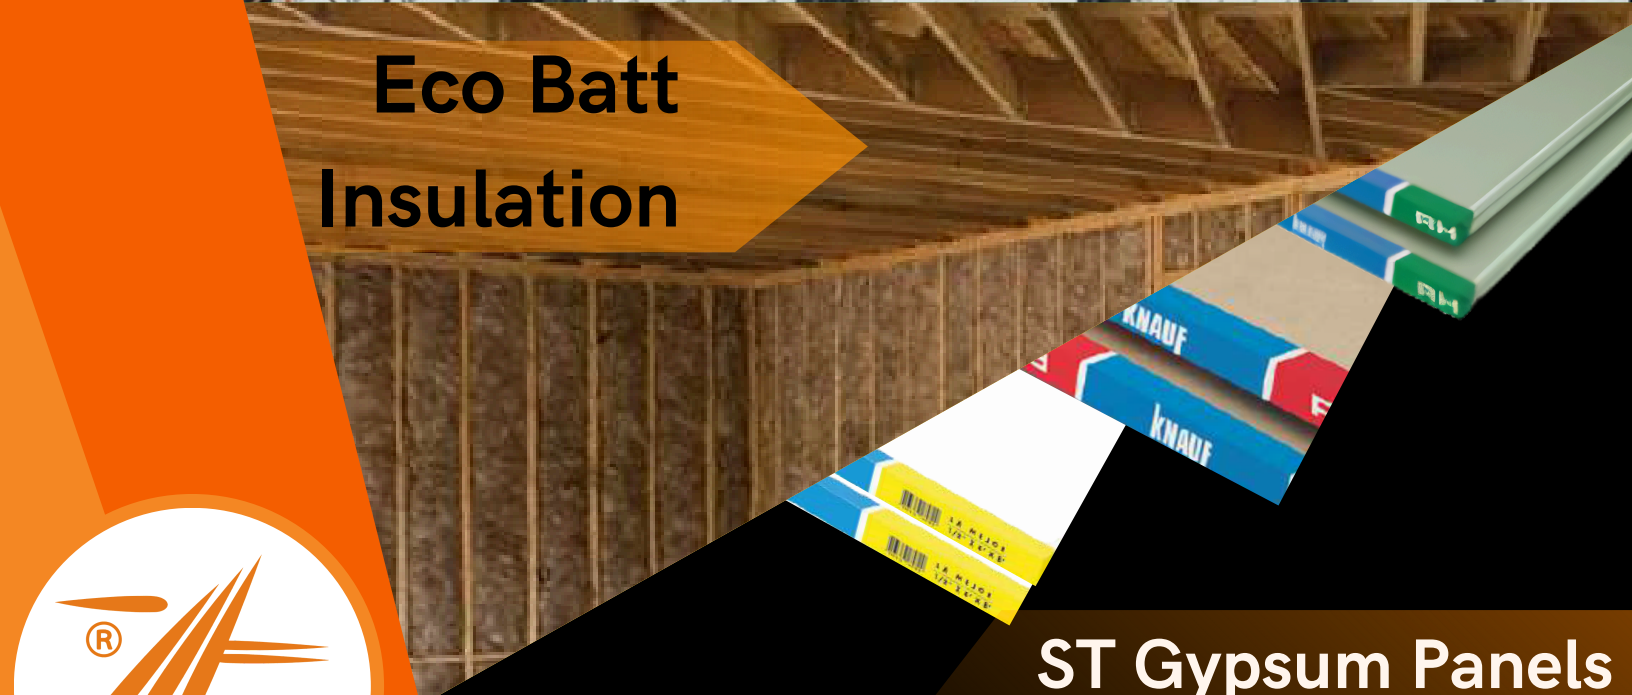


BENNER PRODUCTS

ST Gypsum Panels
RF Gypsum Panels
RH Gypsum Panels
& more

ST GYPSUM PANELS

www.bennerproducts.com



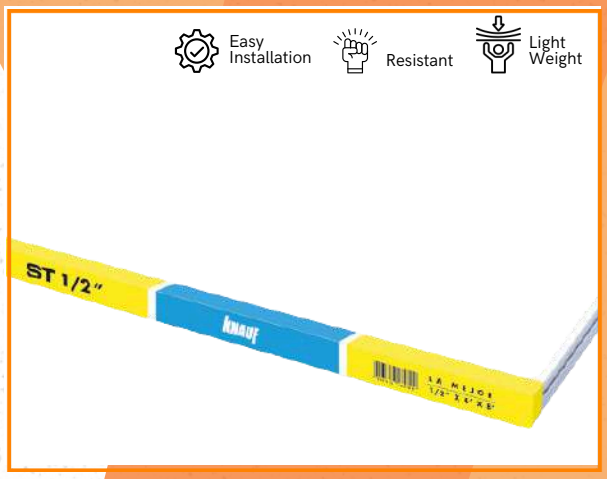

Smooth, flexible gypsum board with a back face covered in gray pape. TType A boards for wall and ceiling systems. Tapered edges facilitate jointing.

Store in covered, dry areas, off the floor, Protect from freezing and extreme heat. Avoid direct sunlight.

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
K009-00-013	ST - Gypsum Standard Board	3/8" (9.5 mm)	4 ft (1220 mm)	8 ft (2440 mm)	18.3 ± 1 kg	Tapered (AK)	625-675 kg/m3	> 49 N	Front Face: Ivory White	Smooth	Piece
K009-00-001	ST - Gypsum Standard Board	1/2" (12.7 mm)	4 ft (1220 mm)	8 ft (2440 mm)	20 ± 1 kg	Tapered (AK)	500-550 kg/m3	> 49 N	Front Face: Ivory White	Smooth	Piece
K009-00-002	ST - Gypsum Standard Board	5/8" (15.8 mm)	4 ft (1220 mm)	8 ft (2440 mm)	31 ± 1 kg	Tapered (AK)	650-700 kg/m3	> 49 N	Front Face: Ivory White	Smooth	Piece

SP GLASS PANELS






Non-combustible gypsum core. Water-resistant and suitable for exterior use in EIFS systems. Both sides coated with inorganic glass fiber.

Stored in roofed and dry areas, on the floor. Protect against freezing and extreme heat. No direct sunlight.

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
K009-00-007	SP - Glass Panels	1/2" (12.7 mm)	4 ft (1220 mm)	8 ft (2440 mm)	24.5 ± 1 kg	Square	741 kg/m3	> 64 N	Front Face: White	Smooth	Piece

RF GYPSUM PANELS

www.bennerproducts.com

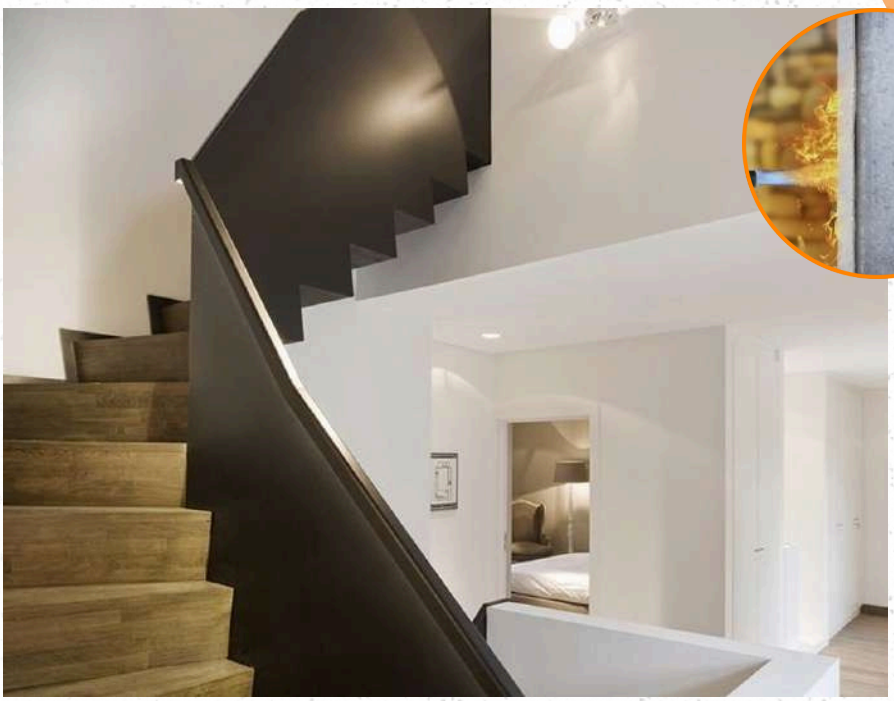




Gypsum Type X core resistant to fire.
Natural finish on the front and earthy color on the back.
Tapered edges facilitate jointing.
Stored in roofed and dry areas, on the floor,
Protect against freezing and extreme heat. No direct sunlight.

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
K009-00-005	RF - Gypsum Resistant to Fire	1/2" (12.7 mm)	4 ft (1220 mm)	8 ft (2440 mm)	24.5 ± 1 kg	Tapered (AK)	648 kg/m3	> 49 N	Front Face: Ivory White	Smooth	Piece
K009-00-006	RF - Gypsum Resistant to Fire	5/8" (15.8 mm)	4 ft (1220 mm)	8 ft (2440 mm)	31 ± 1 kg	Tapered (AK)	670 kg/m3	> 49 N	Front Face: Ivory White	Smooth	Piece

RH GYPSUM PANELS

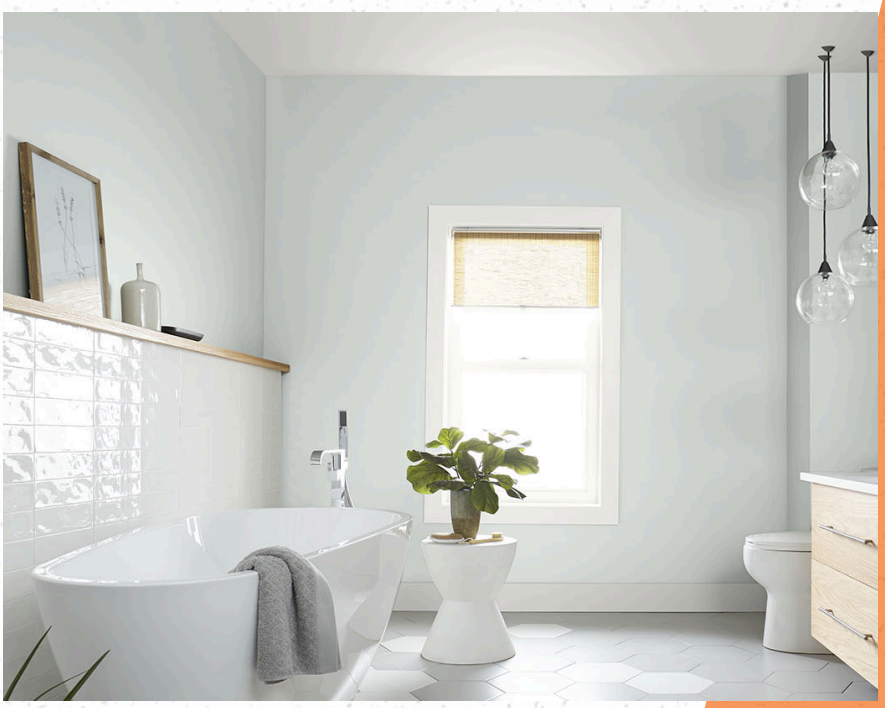



Chemically treated to be resistant to moisture and mold.
Reverse semi-asphalted.
Tapered edges facilitate jointing.
Stored in roofed and dry areas, on the floor,
Protect against freezing and extreme heat. No direct sunlight.

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
K009-00-003	RH - Gypsum Resistant to Water Penetration	1/2" (12.7 mm)	4 ft (1220 mm)	8 ft (2440 mm)	22.5 ± 1 kg	Tapered (AK)	648 kg/m2	> 49 N	Front Face: Green	Smooth	Piece
K009-00-004	RH - Gypsum Resistant to Water Penetration	5/8" (15.8 mm)	4 ft (1220 mm)	8 ft (2440 mm)	31 ± 1 kg	Tapered (AK)	670 kg/m2	> 49 N	Front Face: Green	Smooth	Piece

USG Sheetrock FireCode

www.bennerproducts.com







This gypsum board is formulated with a non-combustible gypsum core reinforced with fiberglass. It is designed to offer high fire resistance in interior walls and ceilings of commercial and residential projects, ensuring structural safety with a smooth, paintable finish.

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
USG-00-001	USG Sheetrock FireCode	5/8" (15.9mm)	4 ft (1220mm)	8 ft (2440mm)	31.8 kg	Tapered	1,300 kg/m^3	≥ 654 N	Light gray	Smooth	Piece
USG-00-002	USG Sheetrock FireCode	5/8" (15.9mm)	4 ft (1220mm)	10 ft (3050mm)	39.9 kg	Tapered	1,300 kg/m^3	≥ 654 N	Light gray	Smooth	Piece

USG Sheetrock Mold Tough

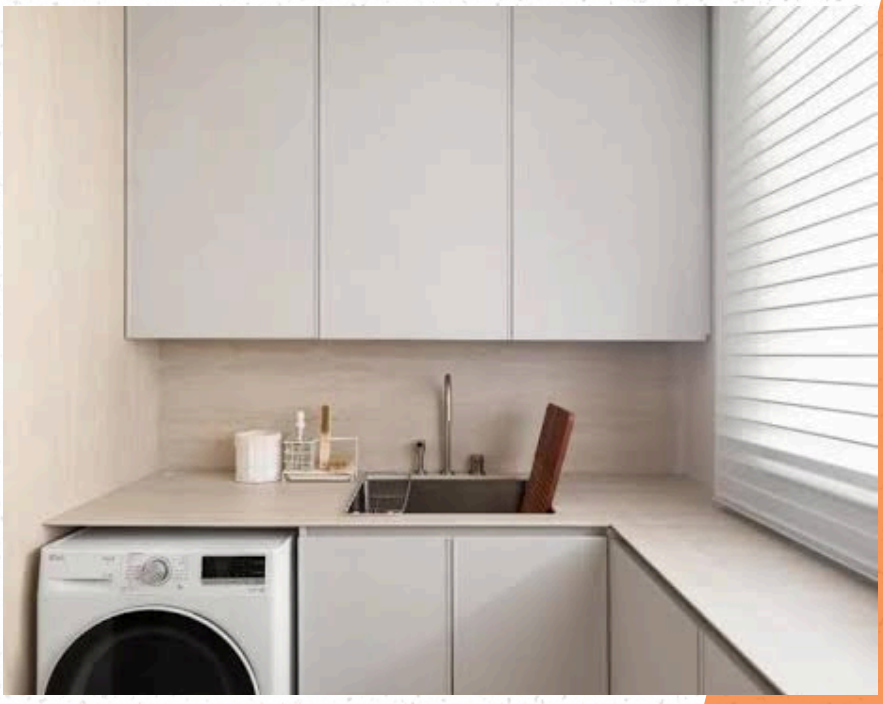

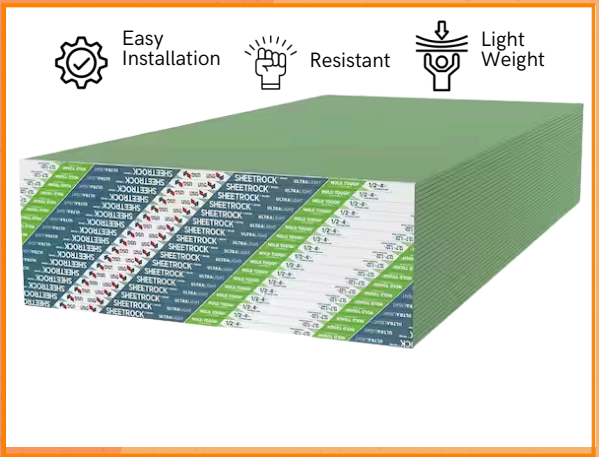


The panel combines a non-combustible gypsum core with a special moisture and mold-resistant treatment. Its iconic recycled green paper surface and beveled edges make it ideal for areas exposed to controlled humidity in commercial or residential projects, ensuring fire protection and a smooth, highly durable finish.

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
USG-00-003	USG Sheetrock Mold Tough	5/8" (15.9mm)	4 ft (1220mm)	8 ft (2440mm)	31.8 kg	Tapered	673 kg/m^3	≥ 654 N	Light Green	Smooth	Piece
USG-00-004	USG Sheetrock Mold Tough	5/8" (15.9mm)	4 ft (1220mm)	10 ft (3050mm)	39.9 kg	Tapered	673 kg/m^3	≥ 654 N	Light Green	Smooth	Piece

USG Securock Glass Mat Sheathing

www.bennerproducts.com




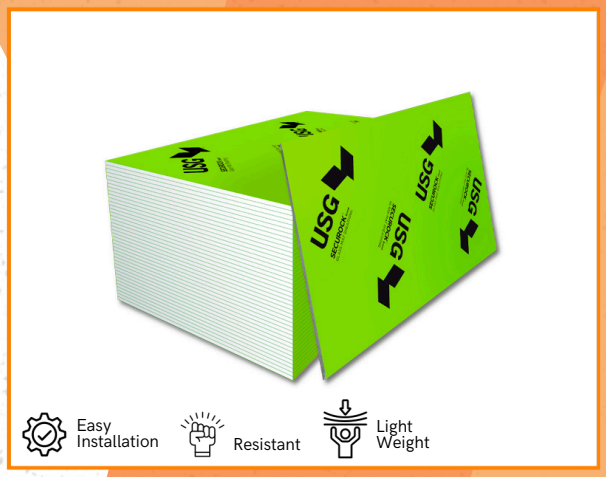

The panel combines a high-performance, non-combustible exterior wall substrate designed to be installed under exterior claddings. It features a moisture-resistant gypsum core wrapped in a coated fiberglass facer mat, making it highly resilient to weathering, water, and mold

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
USG-00-005	USG Securock Glass Mat Sheathing	5/8" (15.9mm)	4 ft (1220mm)	8 ft (2440mm)	32.0 kg	Square Edge	675 kg/m^3	≥ 654 N	Green	Fiberglass mesh	Piece

USG Durock Cement Board

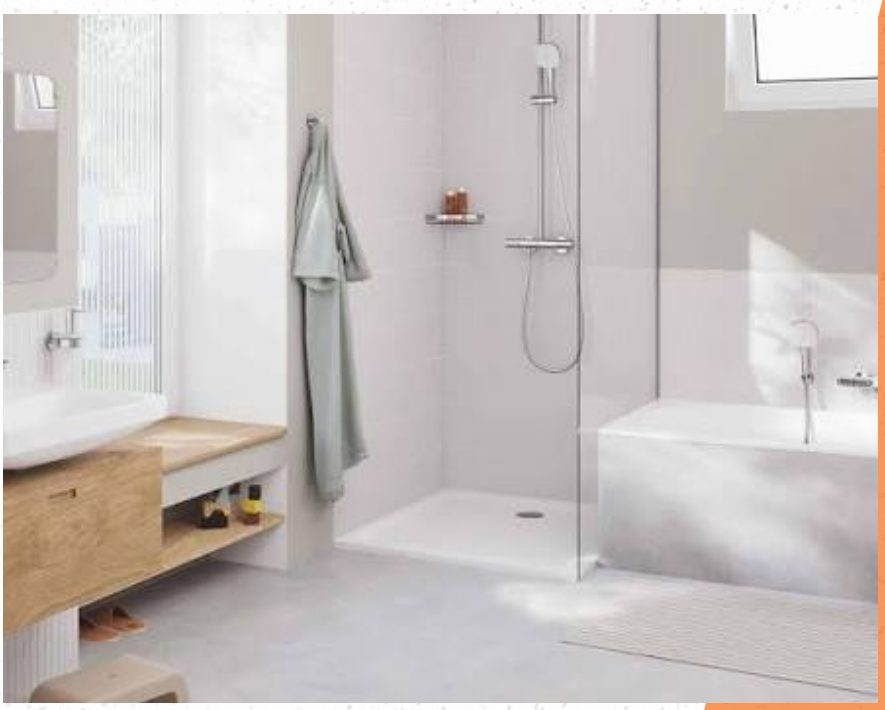



The panel is a high-strength board made of Portland cement and reinforced with fiberglass mesh on both sides, specially designed as a base for installing tiles and ceramic coverings. Thanks to its waterproof and mold-resistant technology, it is the industry standard for areas exposed to constant moisture, such as showers, bathrooms, and kitchens, guaranteeing that the structure will not rot, warp, or discolor over time.

Code	Product Name	Thickness	Width	Length	Weight	Edge	Density	Core Load Strength	Color	Surface	Unit
USG-00-006	USG Durock® Cement Board	5/8" (15.9mm)	4 ft (1220mm)	8 ft (2440mm)	43.6 kg	EdgeGuard	920 kg/m^3	≥ 654 N	Gray	Fiberglass mesh	Piece

ECO BATT INSULATION

www.bennerproducts.com





Code	Product Name	Thickness	Width	Length	Area
K009-00-012	R11 Ecobatt	3-1/2"	16"	96"	170.66 sq ft
K009-00-009	R11 Ecobatt	3-1/2"	24"	96"	256 sq ft

Property (Unit)/Test	Performance
Corrosion (ASTM C1617)	Pass
Thermal Value (ASTM C518)	R-11 (1.9)
Water Vapor Sorption (by weight) (ASTM C1104)	Less than 5%
Combustibility (ASTM E136)	Non-combustible (unfaced only)
Mold Growth (ASTM C1338)	Pass
Surface Burning Characteristics (flame spread/smoke developed) (ASTM E84)	Unfaced and flamed-rated FSK facings: 25/50

DECORATIVE WALL PANELS



DECORATIVE WALL PANELS

FLUTED WALL PANELS

SELF-ADHESIVE WALL STICKERS

BENNER PRODUCTS

DECORATIVE WALL PANELS

Wood Finish Series:

(talk to a representative if you don't see the option you are looking for)

☆ means in stock









Solid & Textured Series:

(talk to a representative if you don't see the option you are looking for)

☆ means in stock

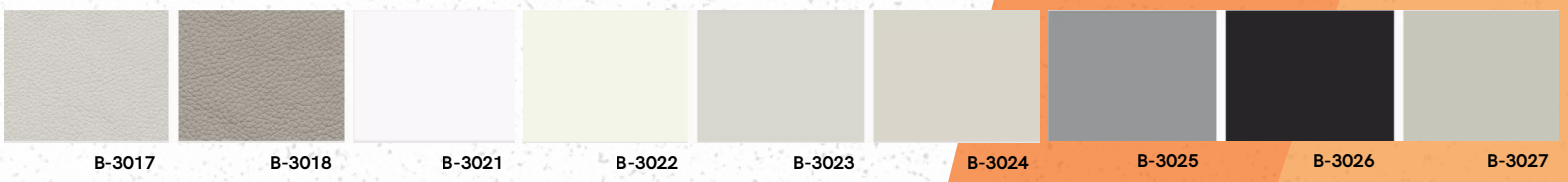

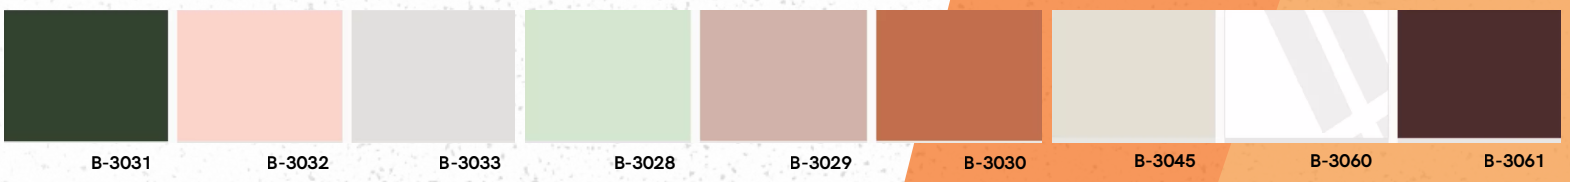





Metal Unique Series:

(talk to a representative if you don't see the option you are looking for)

☆ means in stock






DECORATIVE WALL PANELS

Metal Unique Series:

(talk to a representative if you don't see the option you are looking for)

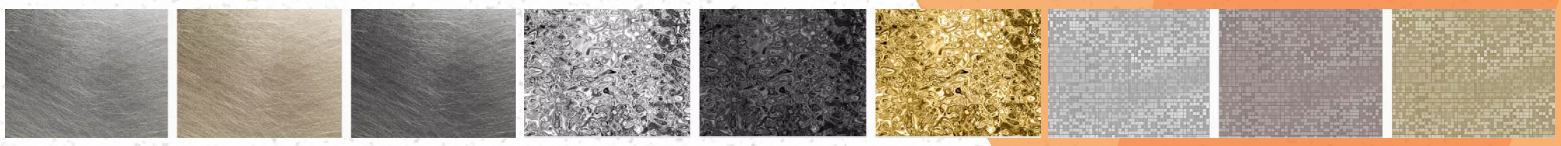

BB-761 BB-762 BB-763 BB-901 BB-902 BB-903 BB-951 BB-952 BB-953

Cloth Finishes Series:

(talk to a representative if you don't see the option you are looking for)


☆ means in stock



6001 6003 6004 6005 6007 6008 6018 6019 6020



6015 6016 6017 6025 6026 6027 6028 6030 6031

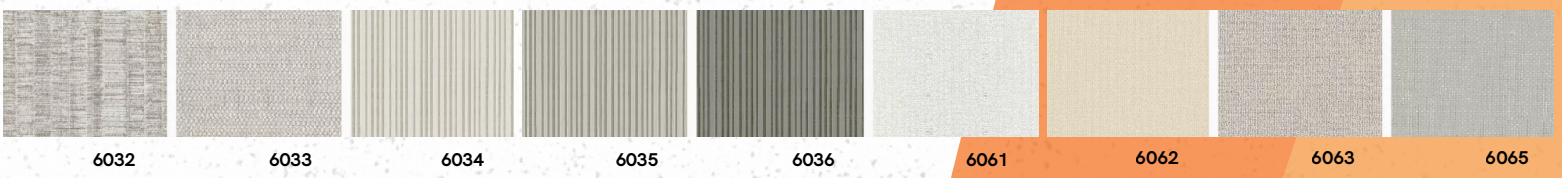

6032 6033 6034 6035 6036 6061 6062 6063 6065



6066 6067 6068 6069 6070 6071


Stony Finishes Series:

(talk to a representative if you don't see the option you are looking for)

☆ means in stock




BBB-5001 BBB-5002 BBB-5003 BBB-5004 BBB-5007 BBB-5008 BBB-5009 BBB-5010 BBB-5011

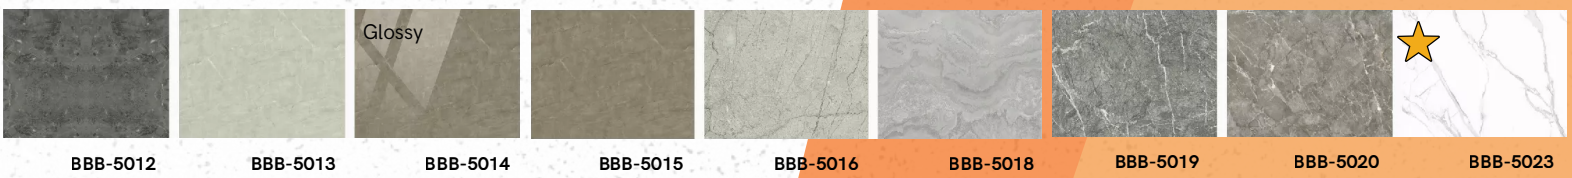

BBB-5012 BBB-5013 BBB-5014 BBB-5015 BBB-5016 BBB-5018 BBB-5019 BBB-5020 BBB-5023



BBB-5024 BBB-5025 BBB-5026 BBB-5028 BBB-5029 BBB-5030 BBB-5032 BBB-5033 BBB-5035

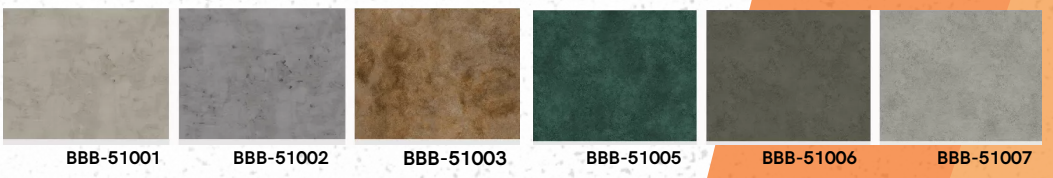

BBB-51001 BBB-51002 BBB-51003 BBB-51005 BBB-51006 BBB-51007


DECORATIVE WALL PANELS

Backdrop Systems








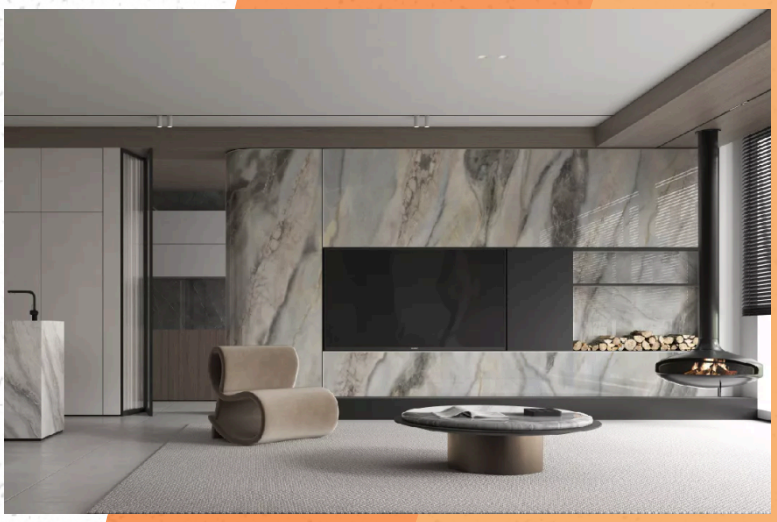

Name	Material / Cross Section / Structure	Size (mm)			Process	EP Rating	Fire Rating	Features	Splicing Method	Optional Colors
		Width	Length	Thickness						
Printed Wall Panels Structure	1. PET scratch and stain resistant layer (on top) 2. Laser permeation membrane layer 3. Basic bottom film layer 4. PUR layer (no granular) 5. High strength crystal co extruded layer (1 mm) 6. Bamboo charcoal fiber layer (3mm / 6mm) 7. High strength crystal co extruded layer (1 mm)	1100 (can be customize >1100)	2800 (can be customize >2800)	5-8	• Bright PETG • Matte PETG	E0	B1	• Eco-firendly • Flame retardant • Waterproof • Bendable • **Infinte Link Picture**	• Tight splicing • Metal profile splicing	• Gilding Series • White Stone Series • Grey Stone Series • Black Stone Series • Warm Luxury Stone Series • Blue/Green Luxury Stone Series • Wood Grain Series
SPC Wall Panels Structure	1. PETG layer (on top) 2. Laser inking layer 3. SPC wall panel	1100	2800	5	• Laser inking	E0	B1	• Eco-firendly • Flame retardant • Waterproof • Bendable • **Infinte Link Picture**	• Tight splicing • Metal profile splicing	• Gilding Series • White Stone Series • Grey Stone Series • Black Stone Series • Warm Luxury Stone Series • Blue/Green Luxury Stone Series • Wood Grain Series

MOQ: 5500 sf

Printed Wall Panels Structure



SPC Wall Panels Structure



Finished Options:



Glossy




Mate

DECORATIVE WALL PANELS

STONY PRINTING SERIES: (ONLY FOR PRINTED AND SPC WALL PANELS)

Option 1: Left and right infinite link

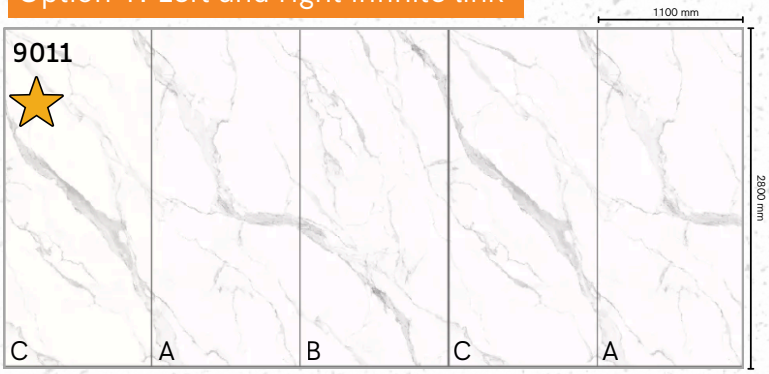




Option 2: four-sided infinite link



You can maintain a continuous pattern by playing with the pre-established sequence


WHITIE SERIES


☆ means in stock

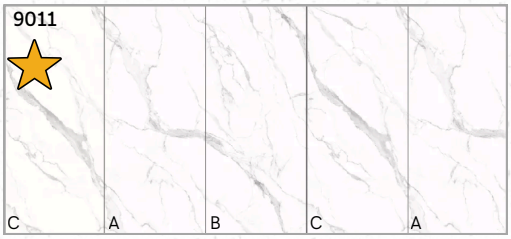








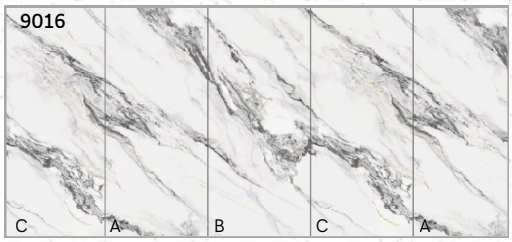


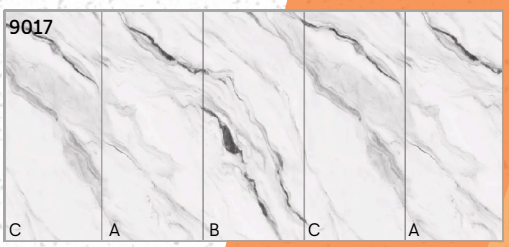

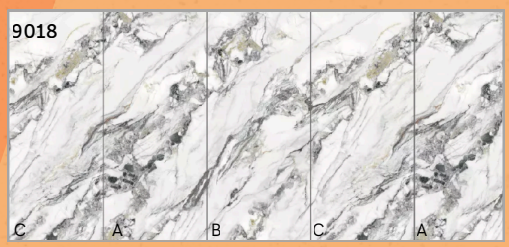

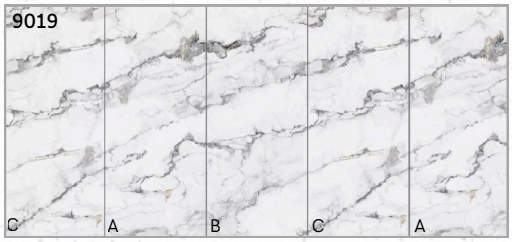


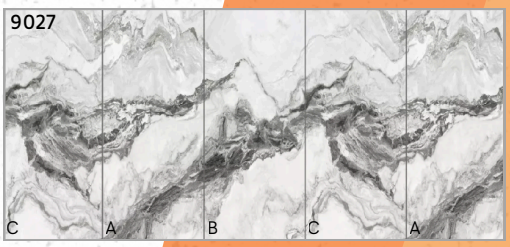


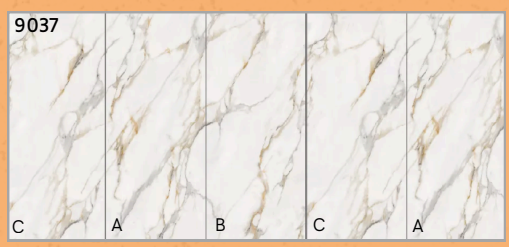


DECORATIVE WALL PANELS


☆ means in stock

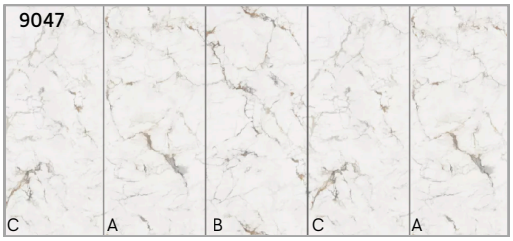


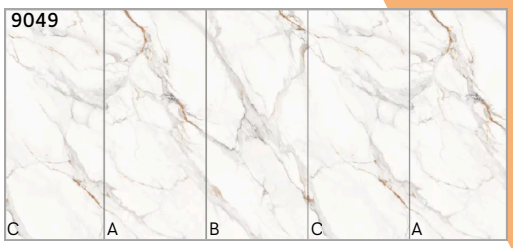



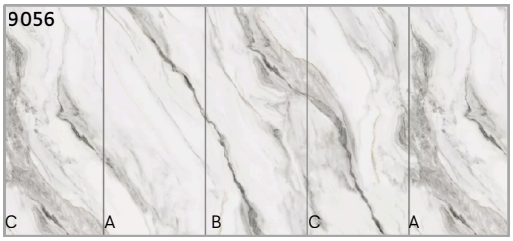


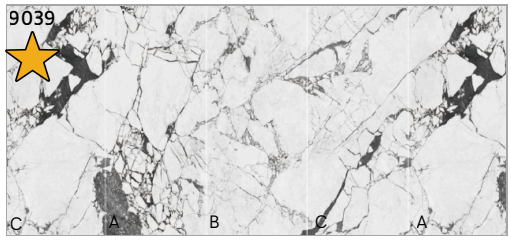


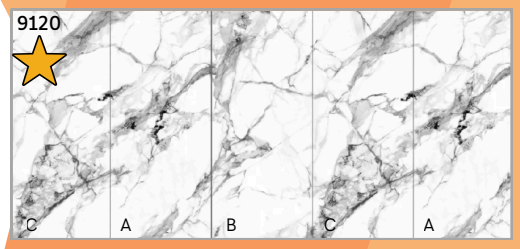



GREY SERIES


☆ means in stock

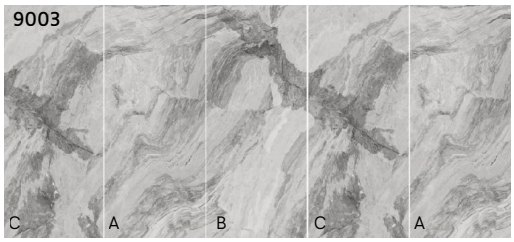


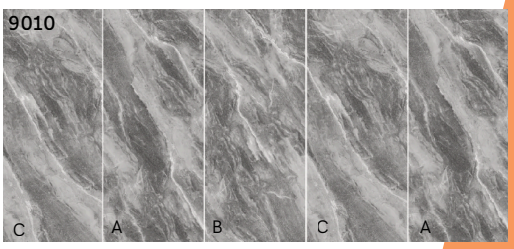


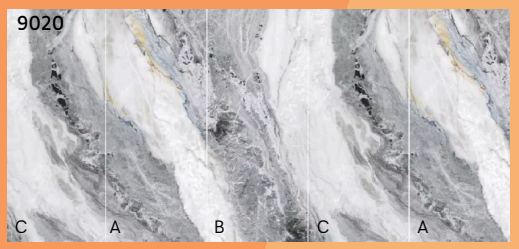


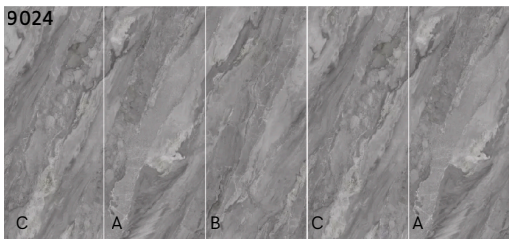


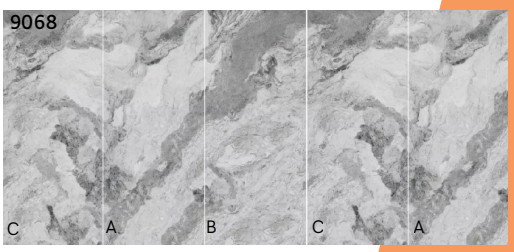

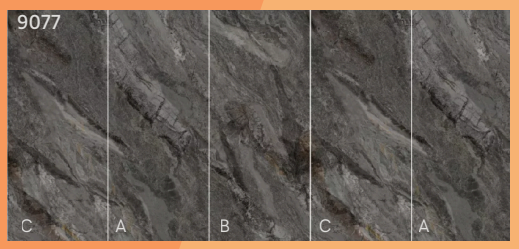

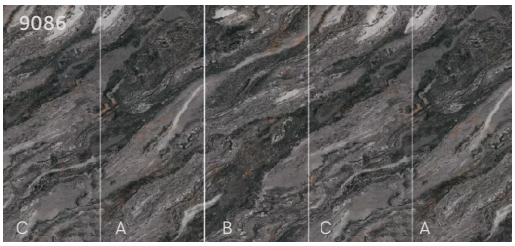


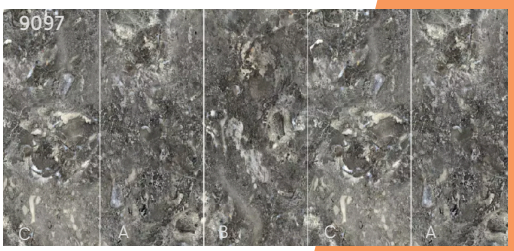


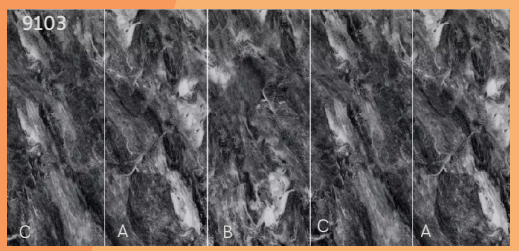



BLACKI SERIES


☆ means in stock

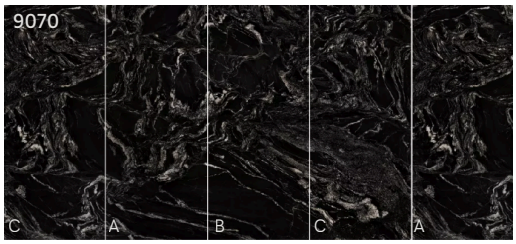


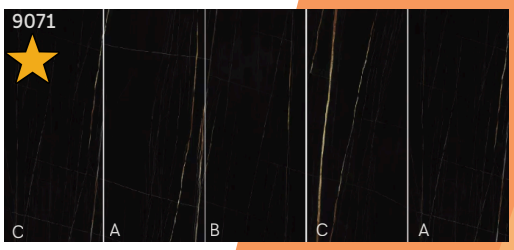

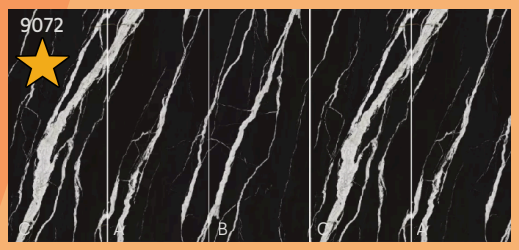

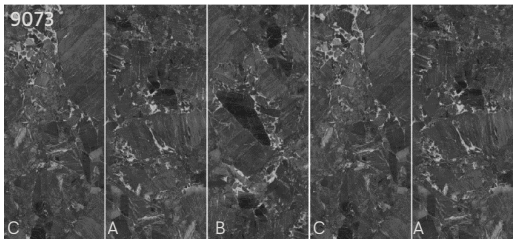

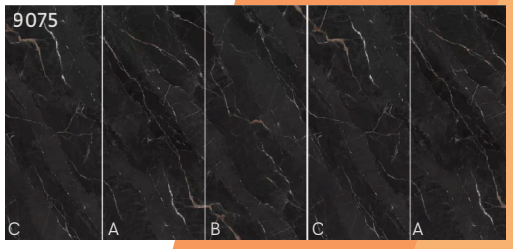


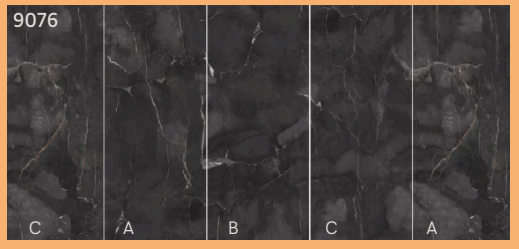


DECORATIVE WALL PANELS


WARMY SERIES


☆ means in stock

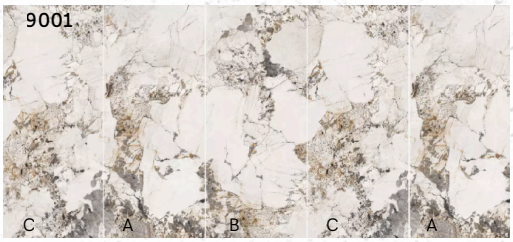


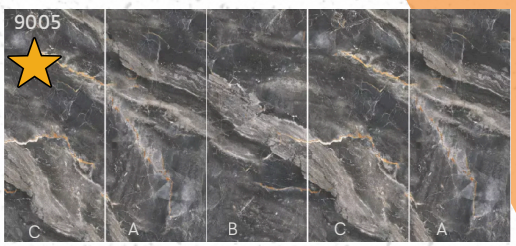





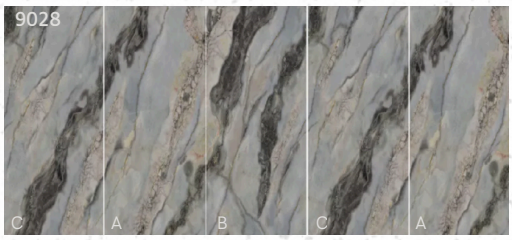

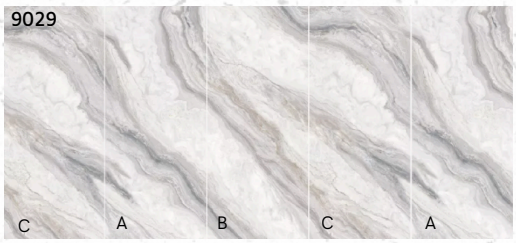


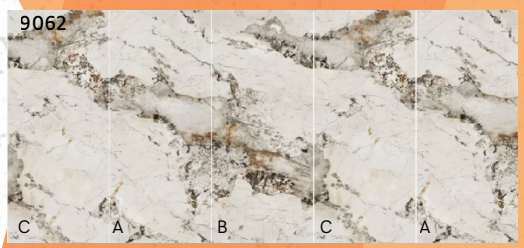


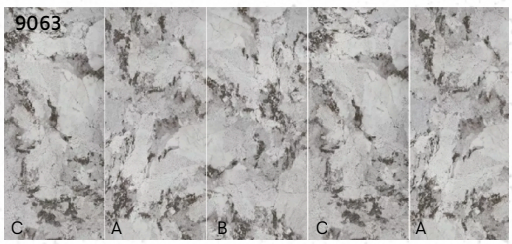


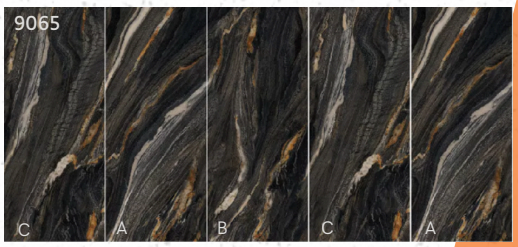





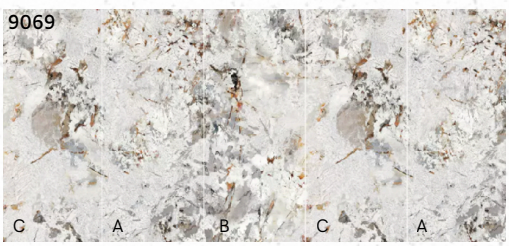


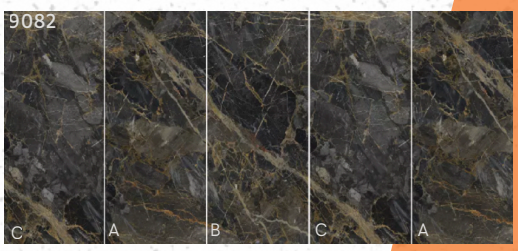

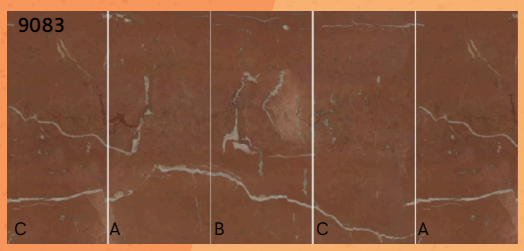

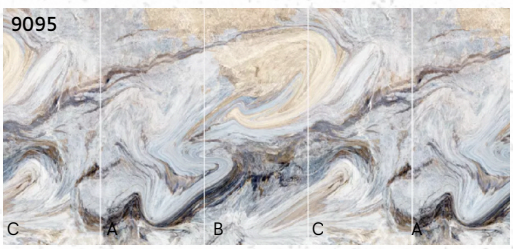


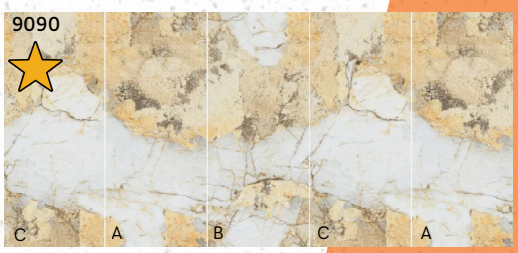


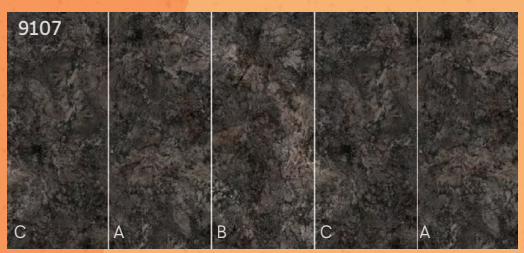



BLUEISH/GREENISH SERIES


☆ means in stock

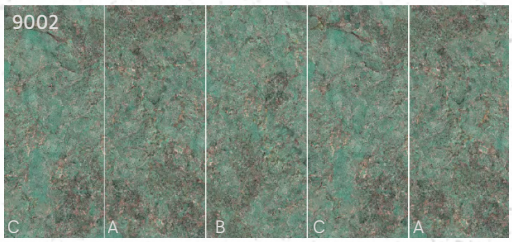

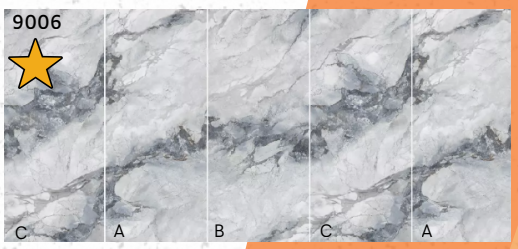

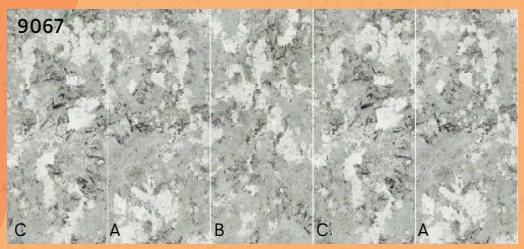

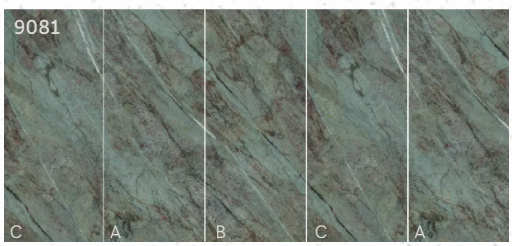

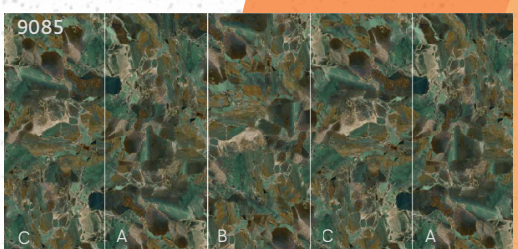






DECORATIVE WALL PANELS


BLUEISH/GREENISH SERIES


☆ means in stock

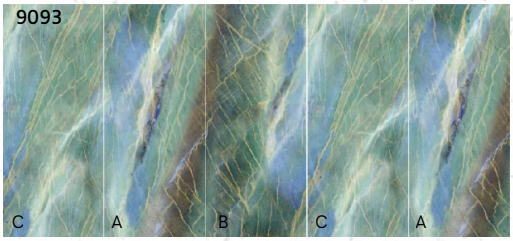

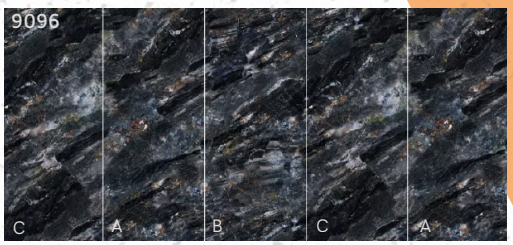


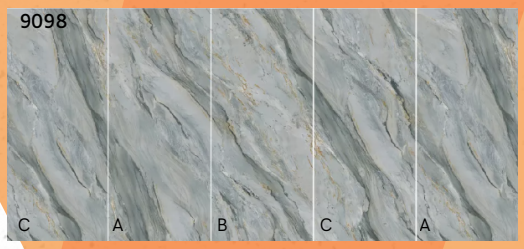


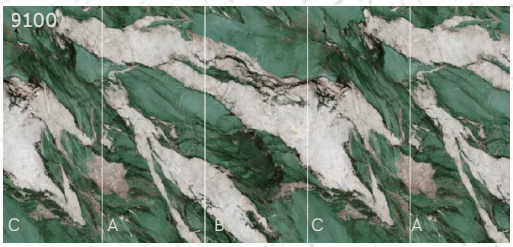

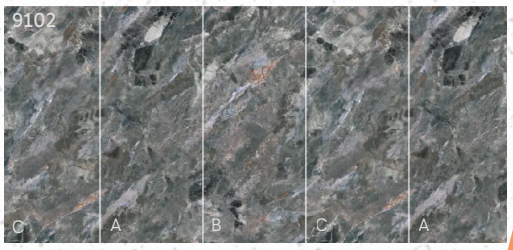



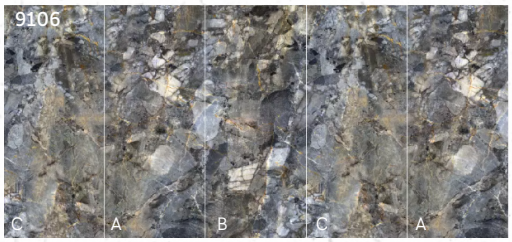


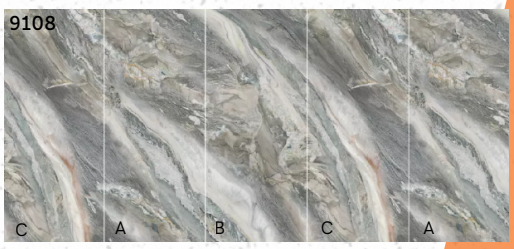




WOOD MADI SERIES

☆ means in stock

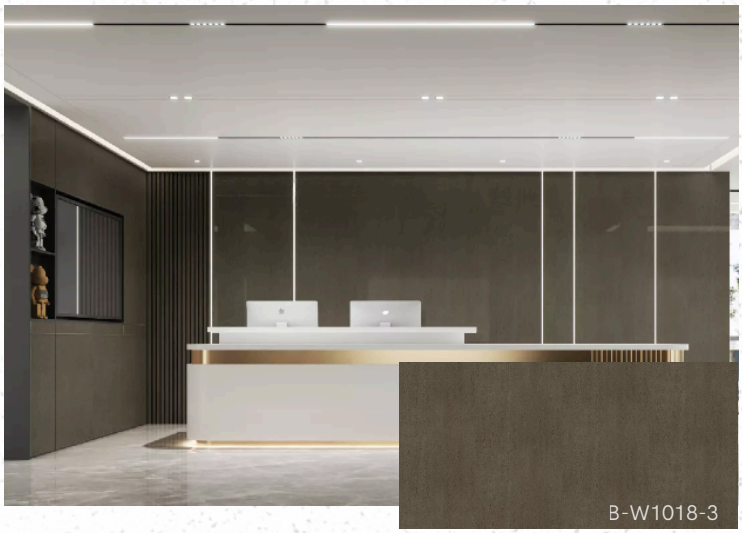





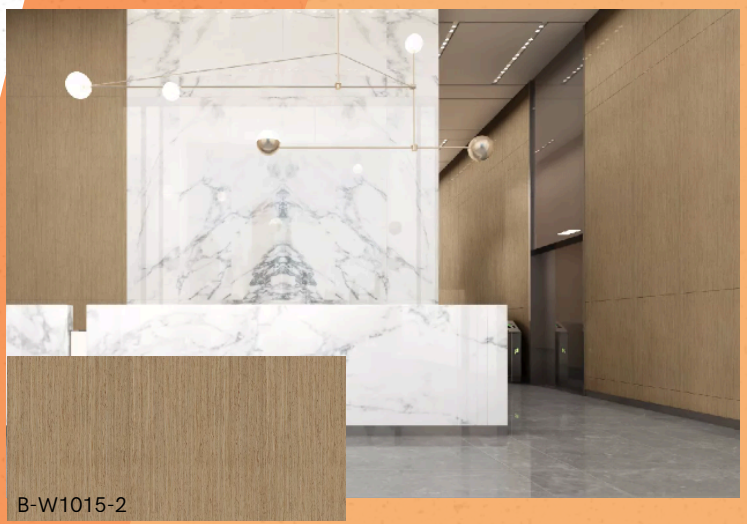


FLUTED WALL PANELS





BAMBOO & WOOD GRATING BF0170



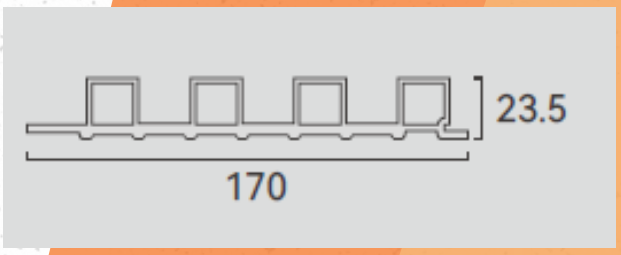










Size(mm)	Ep rating	Fire rating	Advantage
Width: 170 Length: 3000 Thickness: 23.5	E0	B1	waterproof/ bendable

FLUTED WALL PANELS



INNER ARC GRILLE BF0157

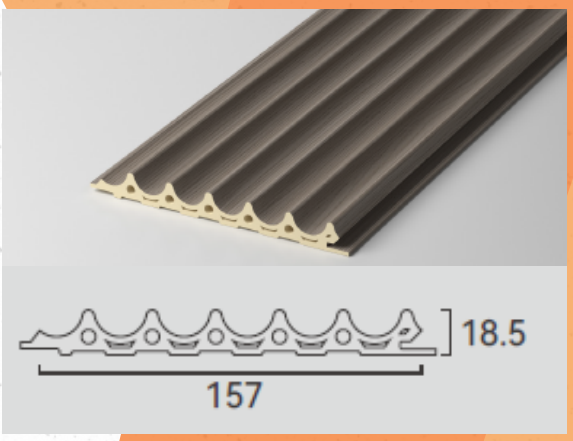








Size(mm)	Ep rating	Fire rating	Advantage
Width: 157 Length: 3000 Thickness: 18.5	E0	B1	waterproof/ bendable

DECORATIVE WALL PANELS





Matte Panel






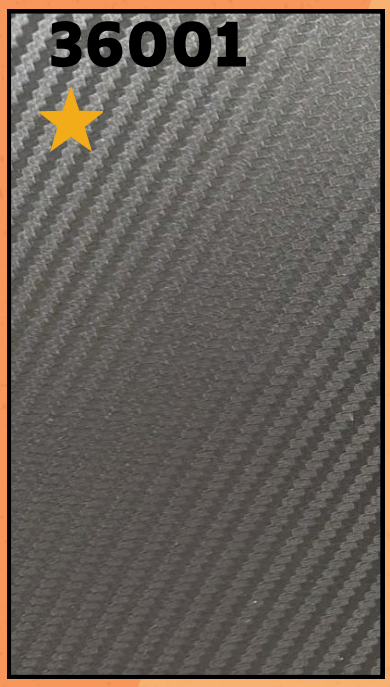


ALUMINUM ACCESSORIES

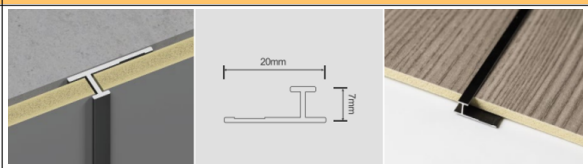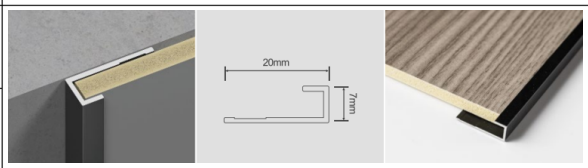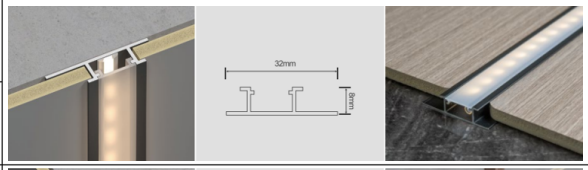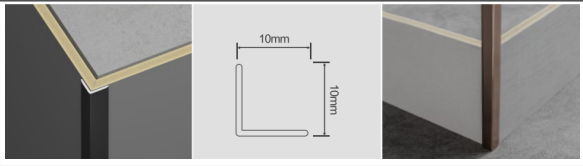CODE	PRODUCT NAME	Length (m)	Thickness (mm)	Color	Image
6801	6801 - Benner Alu Alloy Fit Joint - Black	3	5	Black	
6802	6802 - Benner Alu Alloy Fit Trim - Bronce	3	5	Bronce	
6803	6803 - Benner Alu Alloy Fit Trim - Black	3	5	Black	
6804	6804 - Benner Alu Alloy Fit LED Joint - Bronce	3	5	Bronce	
6805	6805 - Benner Alu Alloy Fit LED Joint - Black	3	5	Black	
6806	6806 - Benner WP Alu Alloy Fit Corner - Bronce	3	8-9	Bronce	
6807	6807 - Benner WP Alu Alloy Fit Corner - Black	3	8-9	Black	

SELF-ADHESIVE WALL STICKERS

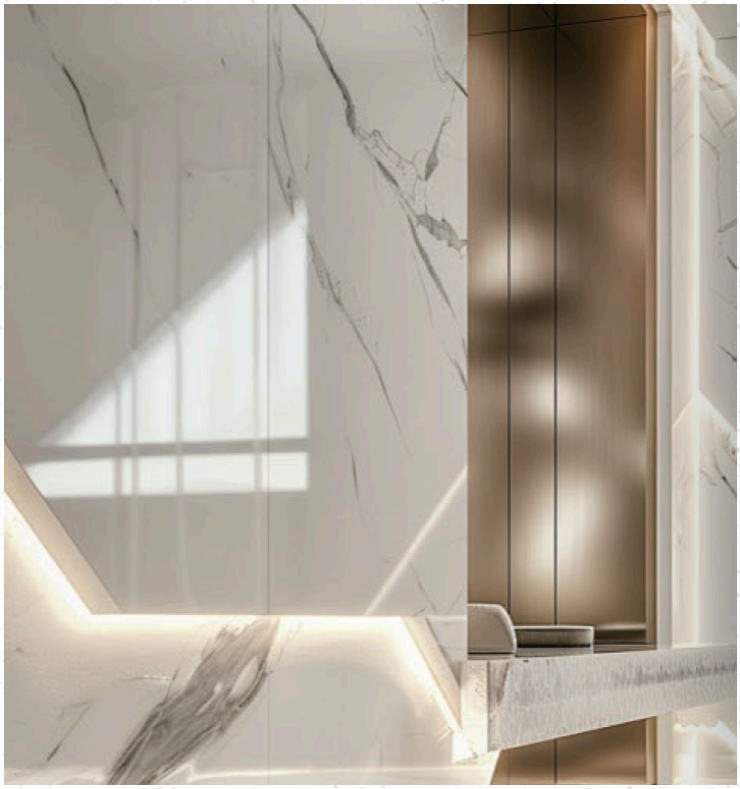


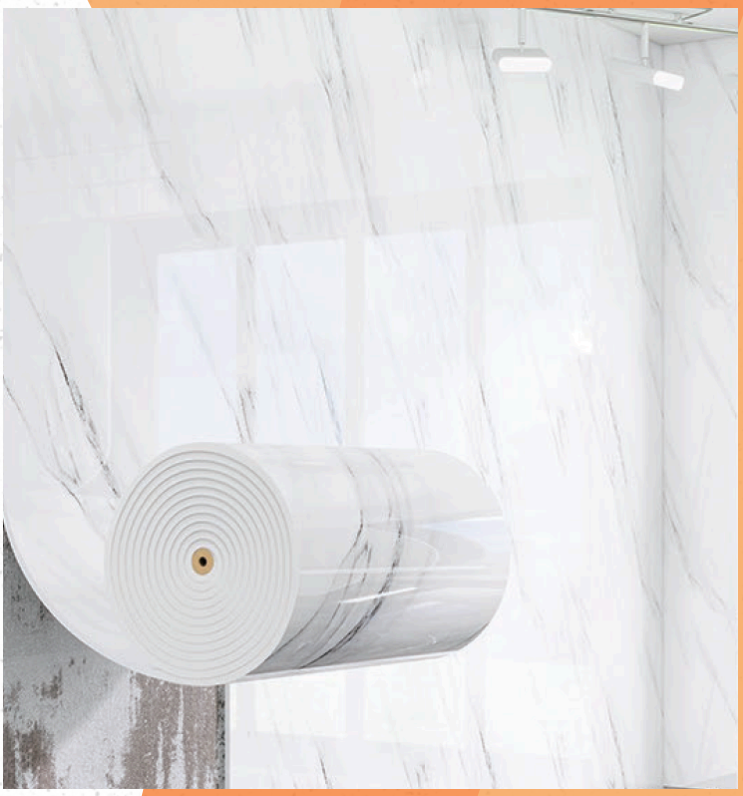

SIZE(mm)	THICKNESS	MATERIAL	ADVANTAGE
Width: **600** Length: **2800/3000** / Width: **1200** Length: **2800/3000**	2mm (Customizable thickness)	PVC+XPE PET+XPE	Waterproof and moisture-proof / Wear-resistant and scratch-resistant/ Environmental protection / Easy to cut / Convenient construction

CONSTRUCTION DESCRIPTION

Plane construction

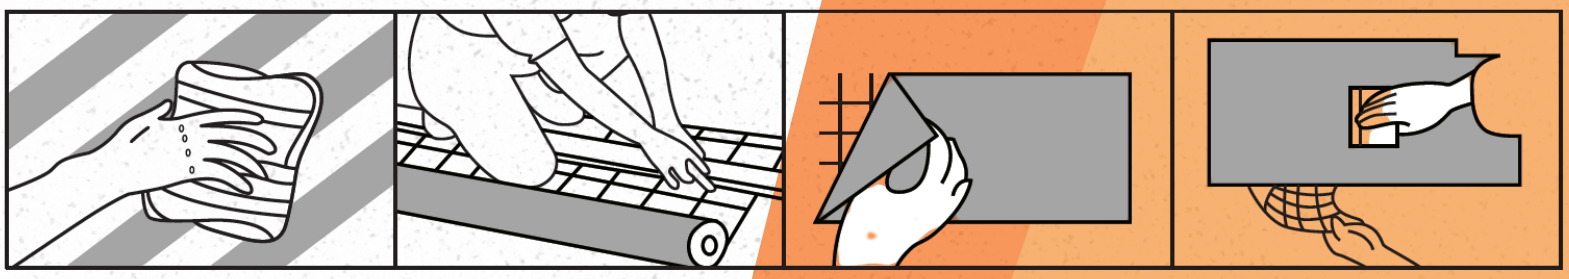

Step 1: **Clean the construction surface**

Dust and uneven construction suraces can cause the film to not stick firmmly

Step 2: **Crop Size**

Measure the construction surface area and cut the stickers (reserve 0.1 meters in length and width for edge wrapping)

Step 3: **Tear off the protective paper**

Tear and stick at the same time (cannot tear off the backin gpaper at once)


Step 4: **Attach the construction surface and scrape it flat**


Align the construction surface and use a scraper to scrape it flat in the same direction

SELF-ADHESIVE WALL STICKERS






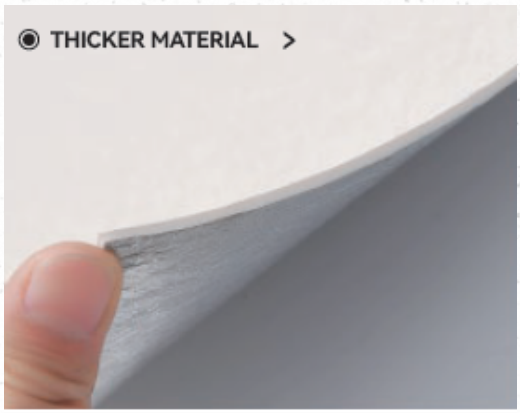


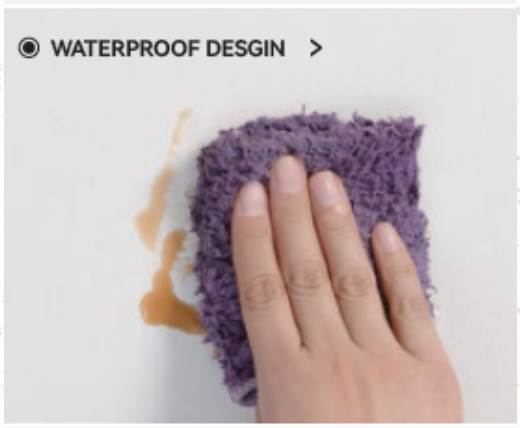




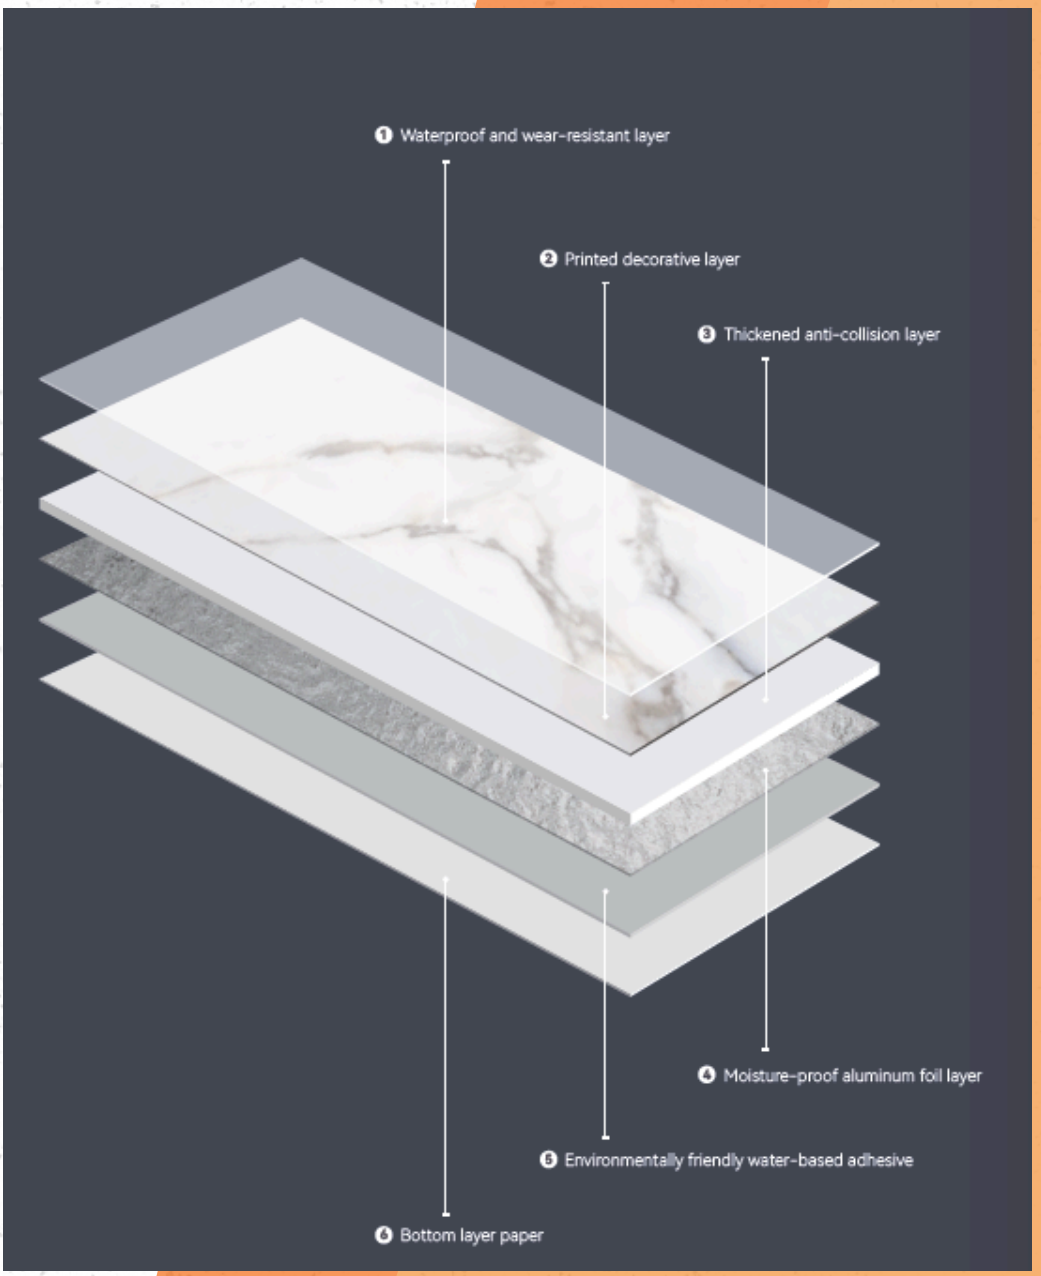


SELF-ADHESIVE WALL STICKERS

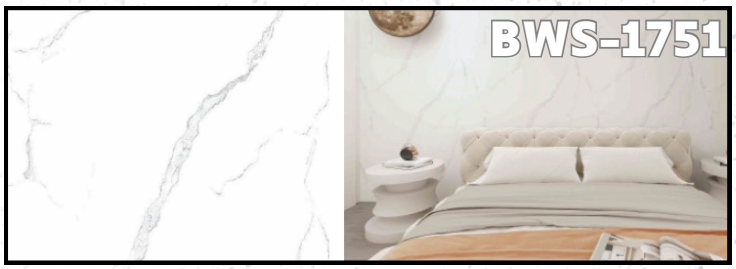



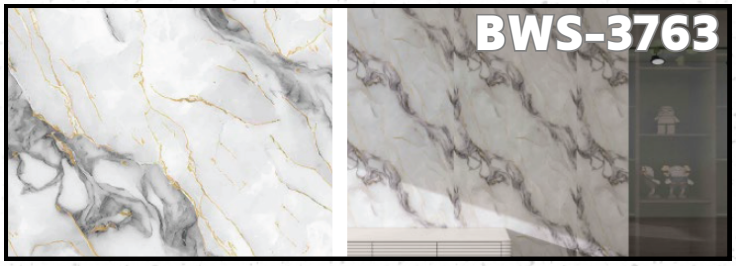



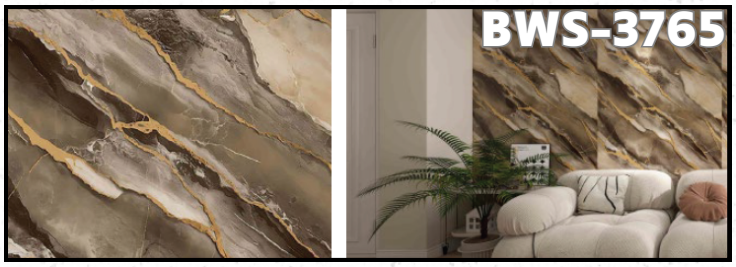















BENNER ACCESS DOORS



BENNER PRODUCTS

BENNER ACCESS DOORS

www.bennerproducts.com





- Provides Concealed Access: Easily access plumbing, wiring, and cables while maintaining a clean, professional finish.
- Easy Installation: Designed for straightforward setup using standard tools, allowing for hassle-free mounting while ensuring a secure fit.
- Customizable Appearance: Designed for walls and ceilings up to 3/4" thick; can be painted or wallpapered to blend seamlessly with your space.
- Durable and Long-Lasting: Made from high-quality materials designed to withstand regular use and environmental changes.
- Wide Range of Applications: Perfect for concealing spa pumps, security systems, HVAC components, and computer, audio, or TV cables, offering flexibility for residential or commercial use.
- Neat and Tidy Solution: Keeps spaces organized by hiding unsightly cables or equipment while allowing quick access for maintenance.

ITEM#	SIZE
034001	4" X 4"
034002	4" X 6"
034003	6" X 6"
034004	8" X 8"
034005	12" X 12"
034006	16" X 16"
034007	22" X 22"

Fiberglass Reinforced Plastic (FRP)





BENNER PRODUCTS

BENNER FIBERGLASS REINFORCED PLASTIC

www.bennerproducts.com



Our **Fiberglass Reinforced Plastic (FRP)** panels offer a durable, high-performance surface that resists dirt and stains, making them ideal for demanding commercial environments where cleanliness is a priority. Made from an impact-resistant composite commonly used in aerospace, automotive, marine, and construction industries, our FRP panels provide exceptional protection against rot, stains, mold, and mildew. Unlike traditional materials, they won't dent or splinter, even under extreme conditions. If you're looking for a wall or ceiling panel that is easy to maintain and built to withstand heavy use, this is the perfect solution.

Class A Fire Rating .090" thickness embossed		
Physical Property	**Typical Value**	**Test Method**
Flexural Strength (psi)	14000	ASTM D790
Flexural Modulus (psi × 10^6)	0.52	ASTM D790
Tensile Strength (psi)	4300	ASTM D638
Tensile Modulus (psi × 10^6)	0.42	ASTM D638
Barcol Hardness	39	ASTM D2583
Coefficient of Thermal Expansion (in/in – F × 10^5)	3.2	ASTM D696
Water Absorption (%)	0.2	ASTM D570
Surface Burning	Class A	ASTM E-84

Class C Fire Rating .090" thickness embossed		
Physical Property	**Typical Value**	**Test Method**
Flexural Strength (psi)	14000	ASTM D790
Flexural Modulus (psi × 10^6)	0.69	ASTM D790
Tensile Strength (psi)	10000	ASTM D638
Tensile Modulus (psi × 10^6)	1.08	ASTM D638
Barcol Hardness	35	ASTM D2583
Coefficient of Thermal Expansion (×10^5 in/in/°F)	3.51	ASTM D696
Water Absorption (%)	0.2	ASTM D570
Surface Burning	Class C	ASTM E-84

Applications:

- **Commercial kitchens**
- **Public restrooms**
- **Hospitals**
- **Schools**
- **Correctional facilities**
- **Restaurants**
- **Car washes**
- **Meat and dairy processing facilities**
- **Walk-in coolers and freezers**
- **Supermarkets**
- **Clean rooms and laboratories**

BENNER FIBERGLASS REINFORCED PLASTIC – SMOOTH FINISH

www.bennerproducts.com

Our **Benner FRP Smooth Finish** panels are engineered for high-performance environments where cleanliness, durability, and easy maintenance are critical. Designed with a smooth, non-porous surface, these panels provide exceptional resistance to moisture, mold, mildew, and chemicals.

Manufactured using a polyester copolymer resin reinforced with chopped fiberglass, Benner FRP panels deliver excellent impact resistance and long-term performance even under extreme temperature and humidity conditions. Ideal for use where hygiene and durability matter most, these panels install easily over most substrates using standard trims and adhesives.

If you need a seamless, easy-to-clean wall or ceiling surface that resists stains and damage, Benner FRP Smooth Finish panels are the perfect solution.

Physical Property ..075" thickness Panels		
Physical Property	**Typical Value**	**Test Method**
Flexural Strength (psi)	13,000	ASTM D790
Flexural Modulus (psi × 10^6)	0.630	ASTM D790
Tensile Strength (psi)	6,070	ASTM D638
Tensile Modulus (psi × 10^6)	0.76	ASTM D638
Barcol Hardness	38	ASTM D256
Coefficient of Thermal Expansion (×10^{-5} in/in/°F)	3.20	ASTM D696
Water Absorption (%)	0.30	ASTM D570
Surface Burning	Class A	ASTM E-84

*Data based on 0.075" smooth panel testing under controlled laboratory conditions.

- Class A Fire Rated (ASTM E-84)
- NSF/ANSI 51 Certified
- Resists mold, mildew, and chemicals
- Easy to clean, smooth sanitary surface
- High impact and abrasion resistance
- GREENGUARD and GREENGUARD Gold Certified

Applications:

- **Commercial kitchens**
- **Public restrooms**
- **Hospitals**
- **Schools**
- **Correctional facilities**
- **Restaurants**
- **Car washes**
- **Meat and dairy processing facilities**
- **Walk-in coolers and freezers**
- **Supermarkets**
- **Clean rooms and laboratories**

FIBERGLASS REINFORCED PLASTIC

www.bennerproducts.com

White

Bright White



White Smooth

Silver



Black




Almond



Beige



Gray

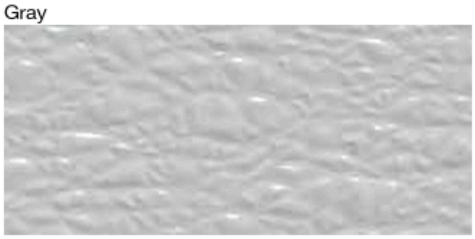


Ivory



Taupe



Sky

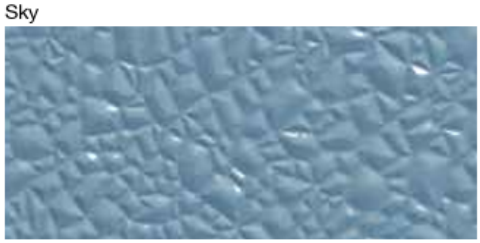

Sage



FRP wall and ceiling panels for those high traffic installations requiring durability and high sanitary standards as well as moisture, mildew and chemical resistance. These are the hardworking, easy-to-clean surfaces you need for utility and service areas.

GREENGUARD

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818

GOLD

FRP is a product that resists extreme changes in temperature and humidity. Manufactured in standard building product sizes, it can be installed on most common substrates and finished

Sheet Size Availability

- **Standard: 4' width × 8', 9', 10', & 12' lengths**
- **Ceilings: 2' × 2' or 2' × 4'**
- **Pre-cut Options: 23.75" × 23.75" or 23.75"X47.75"**
- **Custom sizes available upon request.**

FLOORS



LVT VINYL STAFF


VCT VINYL TILE

BENNER PRODUCTS

LVT VINYL STAFF

Dream wood / High wood



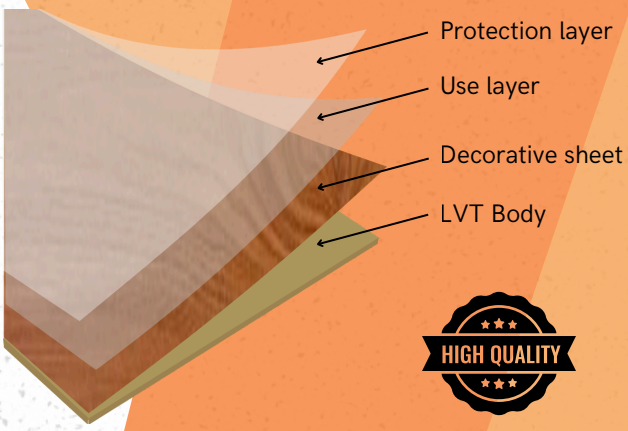

HIGH QUALITY

Easy Installation

Resistant

Light Weight

Maintenance easy

Description	Duela Dream Wood	Duela High Wood
Size	30.48 x 91.44 cm (12” x 36”)	
Thickness	3.0 mm	
Weight	5.09 Kg / m2 14.20 kg / box	
Packing	10 pieces 2.79 m2 / box	
Wear layer	0.30 mm	0.50 mm
Adhesive	Contact	
Durability	5 - 10 - 15 Years According to protective layer, thickness and use	

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.














LVT VINYL STAFF

Exotic wood



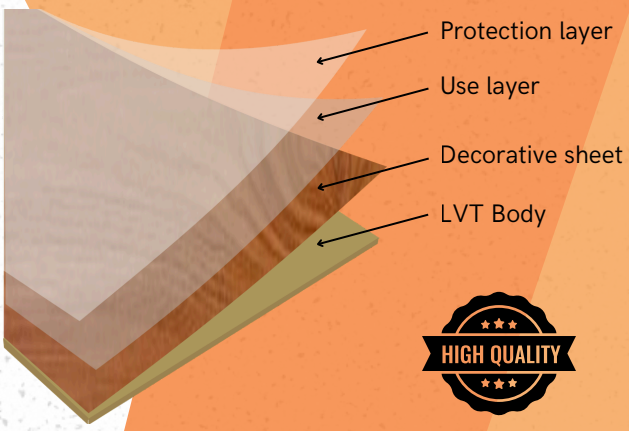

HIGH QUALITY

Easy Installation

Resistant

Light Weight

Maintenance easy

☆ means in stock

Description	Duela Exotic Wood
Size	15.24 x 91.44 cm (6”x36”)
Thickness	2.0 mm
Weight	3.41 kg/m2 11.40 kg x box
Packing	24 Pieces 3.34 m2 x box
Wear layer	0.20 mm
Adhesive	Contact
Durability	5 - 10 - 15 Years According to protective layer, thickness and use

- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.














LVT VINYL STAFF

Style wood







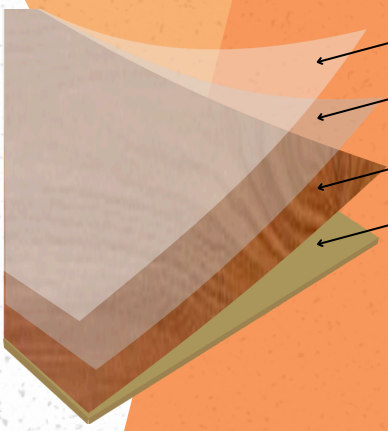

HIGH QUALITY

Easy Installation

Resistant


Light Weight

Maintenance easy

Description	Duela Style Wood
Size	15.24 x 91.44 cm (6”x36”)
Thickness	1.4 mm
Weight	2.55 kg/m2 14.20 kg x box
Packing	40 Pieces 5.57 m2 x box
Wear layer	0.15 mm
Adhesive	Contact
Durability	5 - 10 - 15 Years According to protective layer, thickness and use





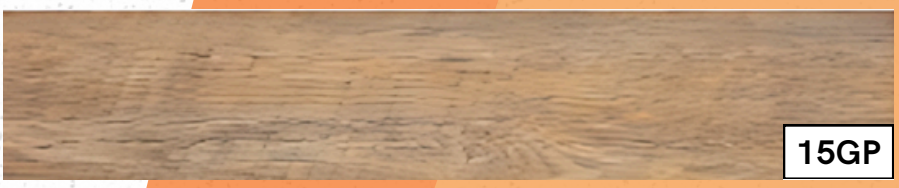






- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.

LVT VINYL STAFF

Imported wood



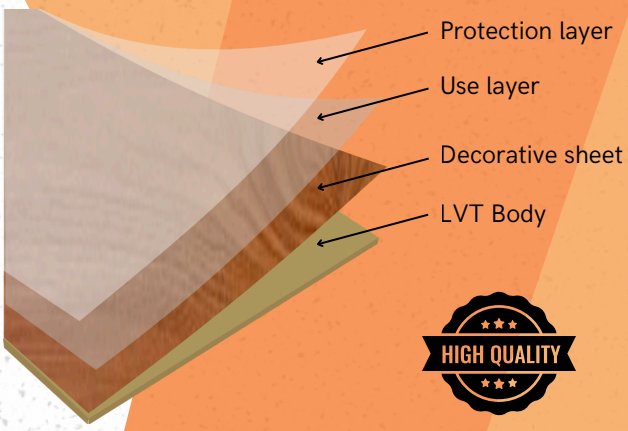

HIGH QUALITY

Easy Installation

Resistant

Light Weight

Maintenance easy

Description	Duela Imported Wood		
Size	22.86 cm x 121.92 cm (9" x 48")	22.86 cm x 121.92 cm (9" x 48")	30.48 cm x 60.96 cm (12" x 24")
Thickness	1.5 mm	3.0 mm	3.0 mm
Weight	2.89 kg/m2 14.5 kg x box	5.73 kg/m2 16 kg x box	5.38 kg/m2 10 kg x box
Packing	18 Pieces 5.02 m2 x box	10 Pieces 2.79 m2 x box	10 Pieces 1.86 m2 x box
Wear layer	0.12 mm	0.30 mm	0.30 mm
Adhesive	Contact	Contact	Contact
Durability	5 - 10 - 15 Years According to protective layer, thickness and use	5 - 10 - 15 Years According to protective layer, thickness and use	15 Years According to protective layer, thickness and use


- The material must be placed on a flat, uniform and level surface, without irregularities, free of dust, grease and dirt. The maximum humidity of the installation surface is 3%.
- The thickness and protective layer depends on the needs of the client.
- Stave with engraving.
- Designed for heavy traffic such as gyms, cinemas, offices, stores, etc.
- It should not be polished.
- No solvent should be applied.


IMP-31


IMP-32


IMP-34


IMP-33

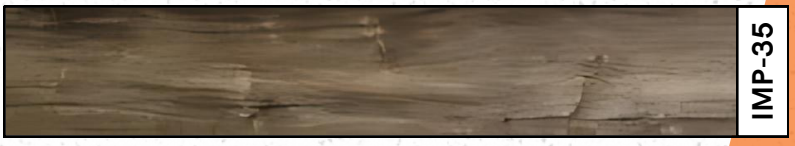
IMP-35


IMP-36


IMP-37

VCT VINYL TILE





HIGH QUALITY

Easy Installation

Resistant

Light Weight

Maintenance easy

Description	Vinyl Tile				
Size	30.48 cm x 30.48 cm (12”x12”)			45.72 cm x 45.72 cm (18”x18”)	
Thickness	1.3 mm	1.6 mm	3.1 mm	1.6 mm	3.1 mm
Weight	2.72 kg/m2 27.2 kg x box	3.20 kg/m2 13.37 kg x box	6.76 kg/m2 28.23 kg x box	3.20 kg/m2 13.37 kg x box	6.76 kg/m2 28.25 kg x box
Packing	108 Pieces 10.03 m2 x box	3.20 kg/m2 13.37 kg x box	6.76 kg/m2 28.23 kg x box	20 Pieces 4.18 m2 x box	20 Pieces 4.18 m2 x box
Adhesive	Latex				
Model	Alabastro Erernolux Vis Madeiras Mármol Parquet Tradicional	Century Eternolux Onyx Royal Sahara Sólida	Century Eternolux Onyx Royal Royal Colors Royal Plus Sahara Sólida	Carrara	

Maintenance:


- All you need is water, soap or some liquid floor cleaner.
- It can also be polished, resulting in a new floor appearance.
- It can be installed with special latex glue for tile, also with contact glue *depending on the humidity of the surface is how the appropriate adhesive is chosen for installation, that is, if there is excess humidity, it is advisable to use latex glue.

Benefits:

- Easy installation. If any piece is damaged, it can be replaced without having to remove the entire floor.
- Slip-resistant and easy to maintain.
- Self-extinguishing.
- Thermal and acoustic insulation.
- Very lightweight materials that comply with new lightweight construction standards.

VCT VINYL TILE

ALABASTER



626

CARRARA


561


562


566


567


569


☆ means in stock

CENTURY


862


866


815



865


810


VCT VINYL TILE

ETERNOLUX


210


215

MADEIRAS


160


161

MARMOL


500


502

ONYX


750


752


756

VCT VINYL TILE


PARQUET



170


171



172

ROYAL


873


874


880


881



888

SAHARA


712


713

SOLIDA


733


734

VCT VINYL TILE

ROYAL COLOR


890



891



892

★ means in stock

ROYAL PLUS


956


957 ★

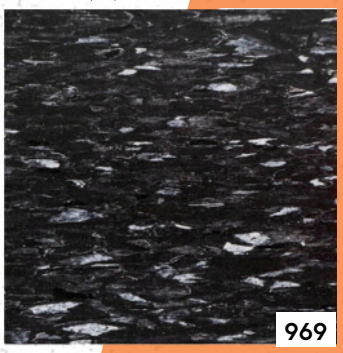
969


980


989


993

TRADICIONAL


015


301


310


312

VCT VINYL TILE

www.bennerproducts.com





HIGH QUALITY

Easy Installation

Resistant

Light Weight

Maintenance easy

Description	Best Regal
Size	30.48 cm x 30.48 cm (12" x 12")
Thickness	3.1 mm
Weight	6.65 kg/m2 27.8 kg
Packing	45 pieces 4.18 m2 / box
Adhesive	Latex

Maintenance:

- All you need is water, soap or some liquid floor cleaner.
- It can also be polished, resulting in a new floor appearance.
- It can be installed with special latex glue for tile, also with contact glue *depending on the humidity of the surface is how the appropriate adhesive is chosen for installation, that is, if there is excess humidity, it is advisable to use latex glue.

Benefits:

- Easy placement. If any part is damaged, it can be changed without having to lift the entire floor.
- Non-slip and easy maintenance.
- Self-extinguishing.
- Thermal and acoustic insulation.
- Very light materials that adapt to the new lightweight construction standards.



BEST-150602




BEST-150612



BEST-150679



BEST-150637

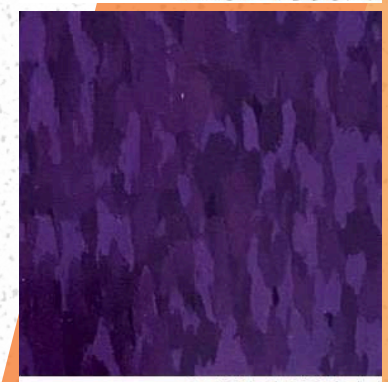


BEST-150644




BEST-150667

VCT VINYL TILE

www.bennerproducts.com

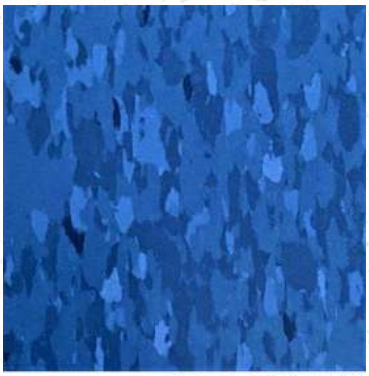
BEST-150670


BEST-150689

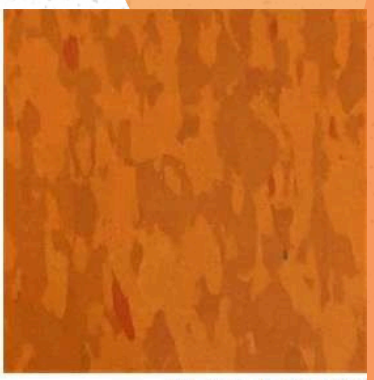
BEST-150688


BEST-150627


BEST-150628


BEST-150629


BEST-150631


BEST-150633


BEST-150643


BEST-150641


BEST-150645


BEST-150613


BEST-150622


BEST-150623


BEST-150619

VINYL BASEBOARDS

www.bennerproducts.com





Easy Installation

Resistant

Light Weight

Maintenance easy

☆ means in stock

CODE	PICTURE	DESCRIPCION	COLOR	SIZE	UNITS
ZCX-800201		Coextruded Vinyl Skirting Boards in roll | 2.45 to 2.65 mm (0.096 to 0.104 in)| Contact adhesive	Brown / Marrón Café	10.5 cm x 40 m (4.13 in x 131.23 feet)	1 roll / 1 rollo
ZCX-800202		Coextruded Vinyl Skirting Boards in roll | 2.45 to 2.65 mm (0.096 to 0.104 in)| Contact adhesive	Black / Negro	10.5 cm x 40 m (4.13 in x 131.23 feet)	1 roll / 1 rollo
ZCX-800203		Coextruded Vinyl Skirting Boards in roll | 2.45 to 2.65 mm (0.096 to 0.104 in)| Contact adhesive	Light Gray / Gris Claro	10.5 cm x 40 m (4.13 in x 131.23 feet)	1 roll / 1 rollo
ZCX-800210		Coextruded Vinyl Skirting Boards in roll | 2.45 to 2.65 mm (0.096 to 0.104 in)| Contact adhesive	Steel Gray / Gris Acero	10.5 cm x 40 m (4.13 in x 131.23 feet)	1 roll / 1 rollo
ZCX-800213		Coextruded Vinyl Skirting Boards in roll | 2.45 to 2.65 mm (0.096 to 0.104 in)| Contact adhesive	Walnut / Nuez	10.5 cm x 40 m (4.13 in x 131.23 feet)	1 roll / 1 rollo

BENNER COATINGS



BENNER JOINT COMPOUND



FINE FINISH PEBBLE



BASE COAT



SLAB-PREP



DURA-SKIM

BENNER PRODUCTS

BENNER BASECOAT

www.bennerproducts.com

Benner Basecoat is a high-performance, polymer-modified, Portland cement–based premixed mortar designed for non-structural applications. It is recommended for use as a base coat for embedding mesh in EIFS systems or as a leveling or finishing coating over cement-based stucco or block surfaces before painting. It can also be used as an adhesive for bonding architectural foam shapes, as well as EPS and XP insulation panels. **Benner Basecoat** is suitable for applications over properly prepared concrete, stucco, or block substrates, as well as wood assemblies. It complies with the applicable sections of ASTM C926 for the application of cement-based stucco.



Property	Test Method / Condition	Result
Compressive Strength	ASTM C109 – 7 days	2,500 psi
	ASTM C109 – 28 days	3,200 psi
VOC Emissions	—	0 g/L
Adhesion to Foam	ASTM C1583 – 28 days	400 psi
Adhesion to Concrete	ASTM C1583 – 28 days (after curing)	4,120 psi
Density	—	90.4 lbs/ft^3
Coverage	As adhesive (with ½" trowel)	70 ft^2
	As base coat (¼" thickness)	20–25 ft^2

Features and Benefits

- Premixed to ensure consistent performance and easy mixing
- Creamy texture for smooth and easy application
- Polymer modification enhances bonding strength and flexibility
- Can be used as an adhesive to attach architectural foam shapes and EPS/XPS insulation panels to approved substrates
- Ideal for smoothing over intermediate layers and fiberglass mesh to help prevent cracking

Applications:

- EIFS base coat for embedding fiberglass mesh
- Adhesive for bonding EPS/XPS insulation panels
- Adhesive for architectural foam shapes and trims
- Leveling and smoothing coat over concrete or stucco
- Skim coat over one-coat or two-coat stucco systems
- Surface preparation before painting or finishing
- Application over block, brick, or cementitious substrates
- Repair coating for uneven or damaged surfaces
- Compatible with fiber-reinforced gypsum board
- Suitable for interior and exterior wall surfaces
- For use on properly prepared wood assemblies
- Ideal for new construction and renovation projects

BENNER FINEFINISH PEBBLE

www.bennerproducts.com

Benner FineFinish Pebble is a pre-mixed, water-based, 100% acrylic decorative coating available in a trowel-applied "Pebble Coat" texture. It is highly flexible, breathable, water-repellent, resistant to dirt pickup and UV exposure. The formula contains granulated quartz, pigments, acrylic resins, and performance additives, providing long-lasting durability for both interior and exterior applications.



Technical Data

Property	Test / Method	Result
Composition	Modified acrylic resins, titanium dioxide, quartz, pigments	—
Appearance	Textured "Pebble Coat" finish	—
Gloss	Not applicable (textured finish)	—
Density	Approx. 9.04 lb/gal (1.08 g/cm³)	—
UV Resistance	ASTM G155 – 2500 hours	No chalking observed
Tack-Free Time	—	2–3 hours
Coverage	—	~150 ft² (14 m²) per pail
Thinning	Potable water (max 250 mL / 8 oz per pail)	—
Application Temperature	—	Max 30°C (86°F), wind ≤15 mph
Dry Time Before Rain	—	Minimum 24 hours

Features and Benefits

- 100% acrylic formulation — highly flexible and durable
- Water-repellent and UV-resistant for long-term protection
- Breathable film helps prevent blistering and peeling
- Fast-drying and easy to apply with stainless steel and plastic trowel
- Decorative textured finish hides surface imperfections and porosity
- Lead-, chromate-, and mercury-free
- Ideal for new construction and renovation projects

Applications:

- Decorative finish for interior and exterior walls
- Restoration of architectural elements such as cornices, columns, moldings, and trim
- Application on new or previously painted surfaces
- Ideal for stucco, masonry, concrete, or cement board
- Can be tinted to desired color
- Recommended for architectural enhancement and surface repair projects
- Suitable for residential, commercial, and institutional buildings

Precautions:

- Do not apply under high humidity or on damp surfaces.
- Use with adequate ventilation. Avoid contact with skin and eyes.
- If sprayed, use a NIOSH/MSHA TC23C respirator, eye, and protective clothing.
- Keep out of reach of children.

BENNER JOINT COMPOUND

www.bennerproducts.com

Benner Joint Compound – All Purpose (Interior Use Only) is a pre-mixed, vinyl-based, ready-to-use formula ideal for finishing gypsum wallboard joints, skim coating, and surface repair. It provides excellent adhesion, low shrinkage, smooth sanding, and long-lasting durability. Designed for professional results with superior workability and crack resistance.



5 gl.

Technical Data

Property	Test / Method	Result
Type	—	Ready-mixed vinyl compound
VOC Content	—	0.28 lbs/gal (34 g/L)
Boiling Point	—	~200°F (93°C)
Flash Point	—	>200°F (Non-flammable)
Sag Resistance	—	Passes
Tack-Free Time	—	2–3 hours at 70°F (21°C)
Coverage	—	Approx. 120–150 ft² per 3.5 gal pail (11–14 m²)
Color	—	Natural white (non-tintable)
Gloss	—	Flat / matte
Storage Temperature	—	40°F to 90°F (4°C–32°C)
Weight per Container	—	62.5 lbs (Equivalent to 5 gal pail coverage)

Applications:

- Ideal for gypsum drywall finishing and joint taping
- Suitable for skim coating, texturing, and patching
- For interior use only
- Not recommended for areas with prolonged moisture exposure

Key Benefits:

- Pre-mixed, vinyl-based ready-to-use formula
- Excellent adhesion and low shrinkage
- Smooth sanding and easy workability
- Crack-resistant and highly durable finish
- Consistent drying and surface performance
- Equivalent coverage to standard 5-gallon pails

Features and Benefits

- Pre-mixed, vinyl-based ready-to-use formula
- Excellent workability and easy application
- Smooth sanding and easy workability
- Crack-resistant and highly durable finish
- Consistent drying and surface performance
- Equivalent coverage to standard 5-gallon pails

Application Guidelines

1. Stir thoroughly before use.
2. Apply using a clean trowel or drywall knife on properly prepared surfaces.
3. Allow each coat to dry completely before sanding or re-coating.
4. Do not apply when air or surface temperature is below 50°F (10°C) or above 90°F (32°C).
5. Maintain consistent drying conditions; avoid forced or direct heat.

BENNER JOINT COMPOUND

www.bennerproducts.com

Additional Product Information

All Purpose Joint Compound – Interior Use Only

Product Overview

Benner Joint Compound is a premixed, ready-to-use, vinyl-based joint compound formulated for gypsum wallboard finishing. It is designed to provide smooth workability, excellent adhesion, low shrinkage, crack resistance, and easy sanding for professional results.

Engineered for high-humidity climates, it offers enhanced mold and mildew resistance on the dried compound surface, making it suitable for Puerto Rico, the Caribbean, Latin America, and other humid regions.

Key Performance Benefits

- Mold & mildew resistant formulation
- Premixed and ready to use
- Superior workability
- Low shrinkage
- Excellent adhesion
- Crack resistance
- Easy sanding
- Multi-purpose use



1 gl.

Recommended Applications

- Embedding tape and finishing joints
- Finishing seams
- Skim coating walls and ceilings
- Light texture work
- Patching and surface repair
- Plaster repair

High-Humidity Performance

In humid environments, slow drying conditions and surface moisture can affect standard ready-mix compounds. Benner Joint Compound is formulated to help resist mold and mildew growth on the dried compound surface, helping reduce maintenance concerns in moisture-prone areas.


Ideal Project Types

Residential, multi-family, commercial, hospitality, education, healthcare, coastal, and tropical projects where humidity-resistant performance is important.

SLAB-PREP

www.bennerproducts.com

SLAB-PREP concrete compound designed for smoothing and texturing interior concrete surfaces such as ceilings and columns. It is ideal for surface preparation prior to painting or decorative finishes, offering excellent workability and compatibility with interior finishing systems.

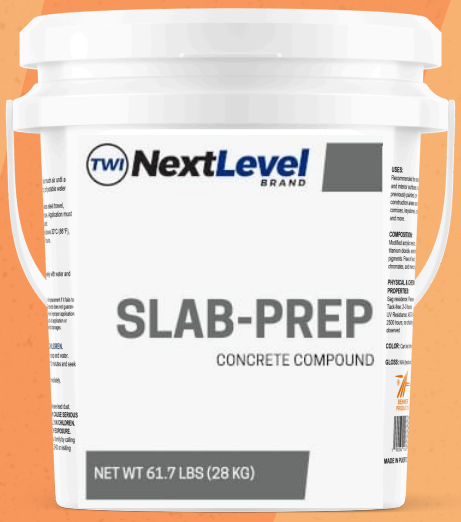

Technical Data		
Property	**Test / Method**	**Result**
Type	–	Concrete compound (joint/finishing compound)
VOC Content	–	8 g/l
pH	–	7-10
Relative density	–	1.0-1.8
Storage Temperature	–	Store material in a cool, dry, ventilated area, away
Composition	–	Carbonato de calcio (<65%), mica, caolín, pirofilita, arcilla attapulgita, perlita, látex; contiene sílice cristalina
Odor	–	Mild
Appearance	–	Off white

Features and Benefits

- Pre-mixed, ready-to-use compound
- Excellent workability and easy application
- Can be applied using multiple tools (trowel, roller, spray)
- Compatible with various textures and finishes
- Consistent drying and surface performance

Application Guidelines

1. Stir thoroughly before use
2. If needed, add small amounts of clean water (do not over-thin)
3. Apply with trowel, roller, or spray equipment
4. Maintain application temperature above 50°F (10°C)
5. Allow to dry completely before final finishing

Applications:

- **Smoothing interior concrete surfaces (ceilings and columns)**
- **Suitable for decorative texturing applications**
- **Surface preparation before painting**
- **Compatible with interior finishing systems**

Precautions:

- **Avoid breathing dust or airborne particles**
- **May cause skin and eye irritation**
- **Use appropriate PPE (respirator, gloves, safety glasses)**
- **Use only in well-ventilated areas**
- **Avoid prolonged exposure**

Best Benner Building distribuidores exclusivo en PR

DURA-SKIM

www.bennerproducts.com

DURA-SKIM is a ready-to-use compound designed for smoothing and finishing interior concrete surfaces such as ceilings and columns. It provides excellent workability and is suitable for surface preparation prior to painting or decorative finishes.



Technical Data		
Property	**Test / Method**	**Result**
Type	–	Acrylic Skim Coating/Texture
VOC Content	–	9 g/l
pH	–	7-10
Relative density	–	11-13 lb/gal
Solubility		Soluble in water
Storage Temperature	–	Store material in a cool, dry, ventilated area, away
Odor	–	Mild
Appearance	–	Off white

Applications:

- **Smoothing interior concrete surfaces**
- **Surface preparation before painting**
- **Decorative texturing applications**
- **Compatible with interior finishing systems**

Precautions:

- **Avoid breathing dust**
- **May cause skin and eye irritation**
- **Use appropriate PPE (respirator, gloves, safety glasses)**
- **Use only in well-ventilated areas**

Features and Benefits

- Pre-mixed and ready to use
- Smooth and consistent application
- Excellent adhesion to concrete surfaces
- Can be applied with trowel, roller, or spray
- Uniform drying performance

Application Guidelines

1. Stir thoroughly before use
2. Add small amounts of water if needed (do not over-thin)
3. Apply using appropriate tools (trowel, roller, spray)
4. Maintain application temperature above 50°F (10°C)
5. Allow to dry completely before finishing

Best Benner Building distribuidores exclusivo en PR

ALLIED BRADS

Milwaukee

STANLEY

DEWALT

TRUPER

QEP

METALTECH

ROBERTS


Eddy Floor Tools

BENNER PRODUCTS

USG

TOOLS & ACCESORIES

MILWAUKEE

				
48-22-3104	49-56-0320	48-22-1500	48-22-2761	48-22-1950
Milwaukee Inkzall Black Markers 4 pc	Adjustable Hole Cutter 2" - 7"	Milwaukee Fastback Compact Folding Utility Knife	Milwaukee 11 in 1 Multi-bit Driver	General Purpose Utility Blades 50pcs.
				
48-22-1905	2737-20	2648-20	48-22-0307	48-11-1850
General Purpose Utility Blades 5pcs.	M18 Driven to Outperform	M18 Random Orbit Sander	Fits All 6" Sawzall Reciprocating Saw Blades	M18 Battery Red Lithium 5A
				
2953-20	49-22-1108	48-32-4004	2420-21	2904-20
M18 Fuel Impact Drive	Milwaukee Demolition Blade Set 8pcs	Milwaukee Impact Driver Bit Set 32pcs	M12 Hackzall Recip Saw Kit	M18 Fuel HammerDrill
			*Sorry, This Item is* NO LONGER AVAILABLE Please search for similar products.	
48-59-1850	48-22-3079	48-22-0425	48-22-2132	2103
M18 XC5.0 Bat/Chrgr Kit	Milwaukee 6 in 1 Pliers	Milwaukee 25 Ft Compact Wide Blade Tape Measure	Milwaukee Multi-Bit Driver With Square	Milwaukee Head Lamp 350 Lumens
Sorry, This Item is NO LONGER AVAILABLE Please search for similar products.				
2846-20	48-22-1926	48-22-6310	48-32-4089	48-22-0104
Milwaukee 175w Power Supply	Milwaukee 4" Tradesman Fixed Blade Knife	kee 10" Comfort Grip Straight Ja	Milwaukee Impact Driver Bit Set 38pcs	Rasping Jab Saw 6"

TOOLS & ACCESORIES

MILWAUKEE

				
2613-20	3632-21	48-11-1820	2686-20	48-32-4513
M18 SDS Plus D-Handle Rotary Hammer	Milwaukee Green Laser Kit 360* 3-Plane	M18 Battery Red Lithium 2A	M18 Cut-Off Grinder 4-1/2" / 5"	Milwaukee Impact Magnetic Bit Holder Set 10pcs

				
48-22-6625	48-22-9801	2526-20	2866-20	3622-21
Milwaukee 25 Ft Compact Tape Measure 12' Reach	65Ft Laser Distance Meter	M12 Cordless Multi-Tool	M18 Drywall Screw Gun	M12 Green Laser Kit

			
2621-20	48-22-1900	2735-20	2626-20
M18 Sawzall Cordless Recip Saw	Milwaukee General Purpose Utility Blades 100pc.	M18 Led Work Light	M18 Cordless Multi-Tool

STANLEY

				
STHT16137LA	TR110	STA0080WS	STA0120WS	STA0180WS
Drywall Screw Adapter	Stanley Heavy Duty Staple Gun	Stanley Lija G80 8 - 7/8" 5pcs.	Stanley Lija G120 8- 7/8" 5pcs.	Stanley Lija G180 8-7/8" 5pcs.

TOOLS & ACCESORIES

STANLEY

			
SW75	14-563	TR150	93-301
Lijadora 8-7/8" Stanley 750w	Stanley Tijera FatMax	Stanley Heavy Duty Staple Gun	Stanley Panel Carry

DEWALT

				
DW2022	DWA2PH2-2L	DWHT80276	DWA2014C4MF	DW2232
DeWalt Phillips Power Bit #2	DeWalt Power Bit 2" #2 (2Pcs)	DeWalt Carbon Fiber Tacker T50	DeWalt Drywall MAX FIT Screw Setter 4pc	DeWalt Square Recess Power Bit #2 3-1/2"

				
DW2033	DW2095	DWA2SQ2-2L	DW2045	DW2014
DeWalt Phillips Pawer Bit #3 3-1/2"	DeWalt Magnetic Drive Guide Set	DeWalt Square Recess Power Bit 2" 2pcs	DeWalt Magnetic Bit Tip Holder 3"	DeWalt Drywall Screw Setter

		
DW2014C4	DW2219	DWA2PH2IR
DeWalt Drywall Screw Setter 4pc	DeWalt Magnetic Nut Driver 5/16"	DeWalt Power Bit 2-1/4" #2


TOOLS & ACCESORIES

TRUPER

				
17751	14425	17328	44520	12939
Steel Fish Tape 49'	Safety Vest Green	High-leverage Linesman Pliers 9"	Rivets 1/8" x 1/4" 50pcs	Magnetic Nut Driver 1/4"
Sorry, This Item is **NO LONGER AVAILABLE** Please search for similar products.			*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.	*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.
101966	11269	17960	12398	22934
Impact Screwdriver Bits Set	SDS Drill Bit 5\16"	Professional Riveter	Llana Redonda 16"	Drywall Saw 6"
		*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.		*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.
14426	18576	14200	16977	12557
Safety Vest Orange	Marking Chalk Replacement Blue	Screwdriver 6 In 1	Snap-Off Knife	Packing Tape Clear 150m
	*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.			*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.
12951	18531	18100	101665	16953
Lightweight Knee Pads	Aviation Snip	Bi-Metal Hacksaw Blades	Tool Pouch With Belt	Utility Blades Replacement 5pc
				*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.
12349	11295	10510	17700	101101
Diagonal Cutting Pliers 7"	6pc Drill Bit Set	Shock Absorbing Lanyard	Spring Clamp 4"	Folding Utility Knife



TOOLS & ACCESORIES

TRUPER

		*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.	*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.	
16432	15963	100798	16683	14384
Heat Gun Kit 2000w	Scraper Knife Blades 5pcs	Mud Pan 12"	Angle Grinder 4 1/2"	16" X 24" Framing Square
			*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.	
100144	17279	18574	17025	12942
Quick-Adjust Clamp	HEAT GUN 1500w	Chalk Reel Kit 100'	Folding Knife	Magnetic Nut Drivers 5/16"
Sorry, This Item is **NO LONGER AVAILABLE** Please search for similar products.				
11895	29100	18174	12940	15131
Insert Bit Set	Pretul Hole Saw Set	Drywall And Jab Saw 6"	Magnetic Nut Drivers 3/8"	Quik Square 7"
	*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.			
16965	46067	13065	12351	101143
Replacement Blades 10pcs	Cable Duplex White 14 AWG 323FT	Slip Joint Pliers 8"	Professional Linesman Pliers 9"	SDS Drill Bit 3/16"
Sorry, This Item is **NO LONGER AVAILABLE** Please search for similar products.		*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.		
46068	14625	12397	13068	19710
Cable Duplex White 16 AWG 323FT	Magnetic Level 18"	Llana Redonda 14"	Groove Joint Pliers 10"	Hammer 16oz.


TOOLS & ACCESORIES

TRUPER

	*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.		*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.	
14628	15267	12122	11584	12759
Magnetic Level 36"	Latex Coated Polyester Gloves "L"	Step Drill Bit 1/8" a 1/2"	Truper Disco Abrasivo 4 1/2"	Masonry 3/8"
				
12120	11258	17968	17967	44525
Step Drill Bit 3/16" a 1/2"	Mansory Concreto 3/16"	Staples 1/2	Staples 3/8	Rivets 5/32" x 1/4" 50pcs
				*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.
14432	101280	20017	15510	12623
Full Body Harness	Caulk Gun	Pretul Segueta 12"	Adjustable Wrench 8"	Masking Tape Blue 1-1/2" x 164'
				*Sorry, This Item is* **NO LONGER AVAILABLE** Please search for similar products.
100436	14380	19281	14626	17356
Hand Sander	Combination Square 12"	Ratchet Tie Down 2pcs	Magnetic Level 24"	Wire Stripper 6"
				
17054	15962	10370	100821	18578
Magnetic Torpedo Level 10"	Scraper 4"	Hard Hat Ratchet Suspension (Capacete)	Impact Scredriver Bits 3"	Marking Chalk Replacement Red

TOOLS & ACCESORIES

TRUPER

				
17965	14386	12348	101687	12755
Staples 1/4	8" X 12" Framing Square	Long Nose Pliers 7"	Marking Crayon	Masonry 1/4"
				
16820	14629	12757	11264	14436
Professional Hammer 20oz	Magnetic Level 48"	Masonry 5/16"	SDS Drill Bit 1/4"	Positioning Rope

Sorry,
This Item is
NO LONGER AVAILABLE
Please search for similar products.

	
14223	11272
Foam Earplugs	SDS Drill Bit 3/8"

TOOLS & ACCESORIES

METALTECH / ANDAMIOS



I-BMD4031YGR
DRYWALL CARTS
WALL HAULER SERIES 4000 | commercial welded | 3,600 lb capacity | 8" HD Casters | carry up to 36 GB of 1/2" | XL deck



I-BMDPL
DRYWALL HOISTS
HD CARTER | Load Capacity 200 Lb | No cable tangle | Hang drywall up to 14' high | for sloped ceiling or vertical wall instalation - 37" loading height | Drive chain.



I-CISC
SCAFFOLD
METAL TECH SCAFFOLD 6' | weight 113.7 LB (51.6 KG) | load capacity 1,100 LB (500 KG) combined weight user + materials | working heights from 27 to 73 IN (68.6 to 185 CM) 2 IN (5 CM) increment adjustible heights | reach 12 FT (3.7 M) stackable up to 3 units high for 24 FT (7.4 M) reach | casters 5 IN. (13 CM) Double Locking Heavy Duty
74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)



I-IMCN
SCAFFOLD
METAL TECH SCAFFOLD 4' | easy storage | weight 50 LB (22.7 KG) | load capacity 500 LB (227 KG) combined weight of user + material | working heights 10 - 21.5 - 33 PO (25 - 55 - 84 CM) | reach 9 FT (2.75 M) | Casters 4 IN. (10 CM) Double Locking Heavy Duty
41 X 22.5 X 45.75 IN (104.1 X 57.2 X 116.2 CM)

FLOORING EQUIPMENTS



NM9-538
MULTIPURPOSE SCRAPER
AC power source | 110 Volts | Amperage capacity 5 Amps | maximun power 480 watts | direct drive | sound level 70 dB and speed 5800 RPM | 37 x 6 x 31 in | 35 pounds | Blade type 4 | Removal of soft floor coverings such as lineoleum, VCT, vinyl, carpet, cork, underpadding, etc.



TB3
TILE BREAKER TB3
AC power source | 110 Volts | Amperage capacity 12 Amps | maximun power 1300 watts | torque 6 foot pounds | impact rate 3600 bits/sec | sound level 75 dB | 25 x 15 x 39 in | 79 pounds | Ceramic and porcelain tile & mortar/thinset removal.

TOOLS & ACCESORIES

METALTECH / ANDAMIOS Y MAS

www.bennerproducts.com



I-IMCNT

4′ Safety rail & tool shelf

Load capacity 500 LB (227 KG) Combined weight of user + materials. 250 lb (113 kg) per platform Working heights 10 - 21.5 - 33 IN. (25 - 55 - 84 CM)



I-C1CAS5

5 in. caster with locking-pin

Assembled dimensions (W X D X H) 3 x 6 x 10 in. (7.6 x 15.2 x 25.4 cm) Weight 3 lb (1.36 kg) Standards ANSI, CSA AND OSHA



I-IDS1830

18-30 in. Drywall Stilts

One piece rubber sole Adjustable Heights from 18 to 30-inch Dual spring action for more flexibility Secure self-locking metal buckle straps Weight (1 STILT) 7.1 LB (3.2 KG) Load capacity 225 LB (102 KG)



I-CISO4

14″ Outriggers for Jobsite Series 6′ Bakers

4 OUTRIGGERS, 4 CASTERS, 12 LOCKING PINS and assembly instructions. Assembled dimensions (W X D X H) 16 x 3.75 x 23.5 in. (40.6 x 9.5 x 59.25 CM) Weight 31.4 lb (14.25 kg)



I-CISGRJP

Guardrail System for Jobsite Series 6′ Baker

2 GUARDRAILS WITH GATES, 4 TOGGLE PINS Assembled dimensions (W X D X H) 69.75 X 29.25 X 44.5 IN. (177.2 X 74.3 X 113 CM)



I-CNG

Motorized System for Baker Type Scaffold

Weight 55.1 LB (25 KG) Hauling capacity 500 LB (226.79 KG) Battery voltage 18-21V (NOT INCLUDED) Multidirectional joystick control positionable

TOOLS & ACCESORIES

METALTECH / ANDAMIOS Y MAS



T15

TriTech T15 Airless Sprayer

Max Pressure 3300 Motor 2.5 HP Power Supply 110V / 220V
Weight 121 lb (54.9 kg) Dimensions 40 x 22 x 38 in

TOOLS & ACCESORIES

Tapetech



- EZ Clean™ Automatic Taper 07TT
- 10" EZ Clean™ Flat Box EZ10TT
- 12" EZ Clean™ Flat Box EZ12TT
- Corner Roller 15TTE
- 3" EZ Roll™ Adjustable Corner Finisher 48TT
- 8" Corner Applicator CA08TT
- Loading Pump 76TT
- Gooseneck 85TT
- Flat Box Filler 90TT
- Corner Finisher Adaptor CFA-TT
- 2 – Extendable Handles XHTT
- 42" FLat Box Handle 8042TT






www.bennerproducts.com

VINYL FLOORING TOOLS AND SUPPLIES

				
7200-30C	7200-11C	2057-4	2057-1	1407-30C
Wall Base Adhesive	Wall Base Adhesive	Vinyl Composition Tile Adhesive	Vinyl Composition Tile Adhesive	Rapid Repair Wood Flooring
7200 Base bond® Wall Base Adhesive	7200 Base bond® Wall Base Adhesive	2057 VCT-EZ Vinyl Composition Tile Adhesive	2057 VCT-EZ Vinyl Composition Tile Adhesive	1407-30C Engineered Advanced Acrylic Wood Flooring Adhesive
30 OZ	11 OZ	4 Gl	1 Gl	30 OZ

				
8200-12	10-981-25	10033	49771	10-918
Fast-tacking aerosol construction adhesive	Herramientas Manuales para Aplicación	Herramientas Manuales para Aplicación	Herramientas Manuales para Aplicación	Herramientas Manuales para Corte
8200 Quick Bond Spray Adhesive	Snozzle Adhesive Applicator	Cove Base Adhesive Spreader	U-Notch Trowel	Pro Vinyl Tile Cutter
12 Oz	unidad	3/16"x5/32"V-Notch	1/16"x1/32"x1/32"	18"

				
10-900	10-195	75006Q	61625	42113
Herramientas Manuales para Corte	Herramientas Manuales	Herramientas Manuales	Herramientas Manuales	Herramientas Manuales para Aplicación
Pro Vinyl Cutter	Heavy Duty Convertible Scraper	Floor Scraper: Blade Wd, Carbon Steel, Std, 48 in Handle Lg, Red/Natural	Tile Mallet	Bucket Scoop
12"	6"	7"	16 oz	unidad